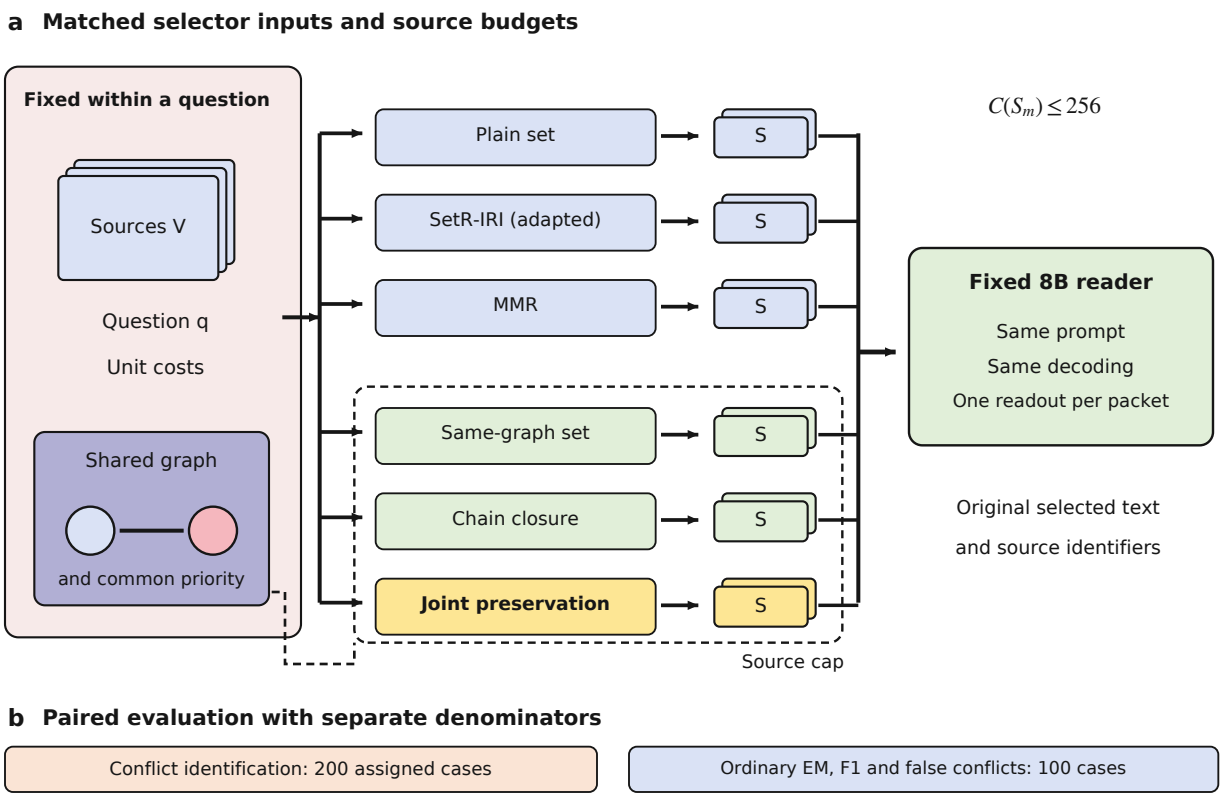

a Matched selector inputs and source budgets
Fixed within a question
Sources V
Question q
Unit costs
Shared graph
and common priority
Plain set
SetR-IRI (adapted)
MMR
Same-graph set
Chain closure
Joint preservation
S
$C(S_m) \leq 256$
Fixed 8B reader
Same prompt
Same decoding
One readout per packet
Original selected text
and source identifiers
Source cap
b Paired evaluation with separate denominators
Conflict identification: 200 assigned cases
Ordinary EM, F1 and false conflicts: 100 cases