

# Step 1 - Types of languages

## 1. Strongly typed vs loosely typed

The terms **strongly typed** and **loosely typed** refer to how programming languages handle types, particularly how strict they are about type conversions and type safety.

### Strongly typed languages

1. Examples - Java, C++, C, Rust
2. Benefits -
  1. Lesser runtime errors
  2. Stricter codebase
  3. Easy to catch errors at compile time

### Loosely typed languages

1. Examples - Python, Javascript, Perl, php
2. Benefits
  1. Easy to write code
  2. Fast to bootstrap
  3. Low learning curve

### Code doesn't work ❌

```
#include <iostream>

int main() {
    int number = 10;
    number = "text";
    return 0;
}
```

### Code does work ✅

```
function main() {
    let number = 10;
    number = "text";
    return number;
}
```


People realised that javascript is a very power language, but lacks types. **Typescript** was introduced as a new language to add **types** on top of javascript.

# Step 2 - What is Typescript

## What is typescript?

TypeScript is a programming language developed and maintained by Microsoft.


It is a strict **syntactical superset** of JavaScript and adds optional static typing to the language.

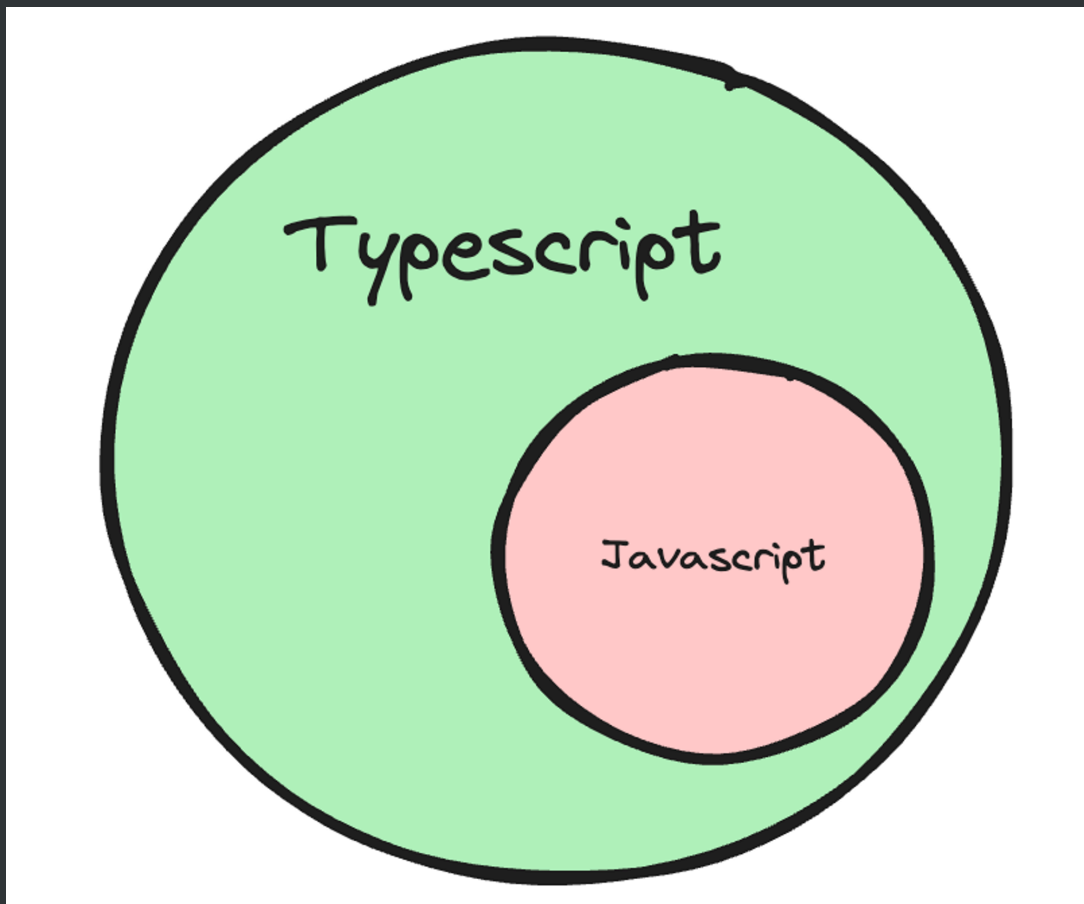

## Where/How does typescript code run?

Typescript code never runs in your browser. Your browser can only understand **javascript**.

1. Javascript is the runtime language (the thing that actually runs in your browser/nodejs runtime)
2. Typescript is something that compiles down to javascript
3. When typescript is compiled down to javascript, you get **type checking** (similar to C++). If there is an error, the conversion to Javascript fails.

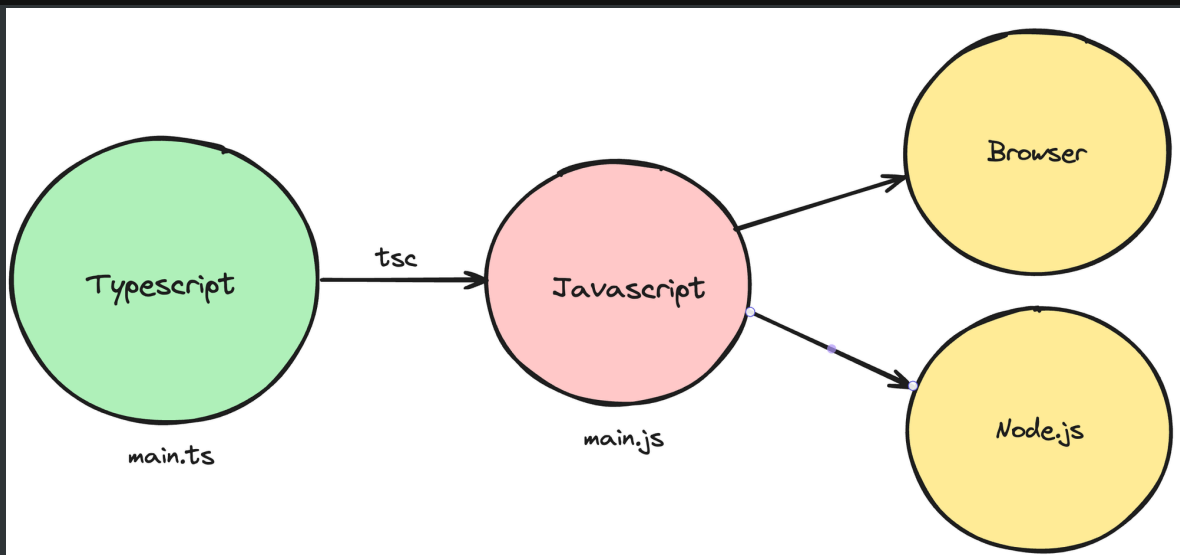

## Typescript compiler

`tsc` is the official typescript compiler that you can use to convert `Typescript` code into `Javascript`

There are many other famous compilers/transpilers for converting Typescript to Javascript. Some famous ones are -

1. esbuild
2. swc

## Step 3 - The tsc compiler

Let's bootstrap a simple Typescript Node.js application locally on our machines

### Step 1 - Install tsc/typescript globally

```
npm install -g typescript
```

Copy

## Step 2 - Initialize an empty Node.js project with typescript

```
mkdir node-app  
cd node-app  
npm init -y  
npx tsc --init
```

[Copy](#)

These commands should initialize two files in your project

```
→ node-app ls  
package.json  tsconfig.json
```

## Step 3 - Create a a.ts file

```
const x: number = 1;  
console.log(x);
```

[Copy](#)

## Step 4 - Compile the ts file to js file

```
tsc -b
```

[Copy](#)

## Step 5 - Explore the newly generated index.js file

The diagram illustrates the compilation process. On the left, a code editor shows a TypeScript file named 'a.ts' with the following content:

```
TS a.ts > ...  
1  const x: number = 1;  
2  console.log(x);  
3
```

An arrow labeled 'tsc' points to the right, where another code editor shows the resulting JavaScript file named 'a.js' with the following content:

```
JS a.js > ...  
1  "use strict";  
2  const x = 1;  
3  console.log(x);  
4
```

Notice how there is no typescript code in the javascript file. It's a plain old js file with no

types

## Step 7 - Delete `a.js`

## Step 6 - Try assigning x to a string

Make sure you convert the `const` to `let`

```
let x: number = 1;  
x = "harkirat"  
console.log(x);
```

Copy

## Step 7 - Try compiling the code again

```
tsc -b
```

Copy

Notice all the errors you see in the console. This tells you there are `type` errors in your codebase.

Also notice that no `index.js` is created anymore

```
→ node-app tsc -b  
a.ts:2:1 - error TS2322: Type 'string' is not assignable to type 'number'.  
  
2 x = "harkirat"  
  ~  
  
Found 1 error.
```

This is the high level benefit of typescript. It lets you catch `type` errors at `compile time`

# Step 4 - Basic Types in TypeScript

Typescript provides you some basic types

`number`, `string`, `boolean`, `null`, `undefined`.

Let's create some simple applications using these types -

## Problem 1 - Hello world



Thing to learn - How to give types to arguments of a function

Write a function that greets a user given their first name.

Argument - firstName

Logs - Hello {firstName}

Doesn't return anything

#### ▼ Solution

```
function greet(firstName: string) {  
    console.log("Hello " + firstName);  
}  
  
greet("harkirat");
```

Copy

## Problem 2 - Sum function



Thing to learn - How to assign a return type to a function

Write a function that calculates the sum of two functions

#### ▼ Code

```
function sum(a: number, b: number): number {  
    return a + b;  
}  
  
console.log(sum(2, 3));
```

Copy

## Problem 3 - Return true or false based on if a user is 18+



Thing to learn - Type inference

Function name - isLegal

#### ▼ Code

```
function isLegal(age: number) {  
    if (age > 18) {  
        return true;  
    } else {  
        return false  
    }  
}
```

Copy

```
console.log(isLegal(2));
```

```
TS a.ts > isLegal
1  function isLegal(age: number): boolean {
2      if (age > 18) {
3          return true;
4      } else {
5          return false;
6      }
7  }
8
9  console.log(isLegal(2));
```

## Problem 4 -

Create a function that takes another function as input, and runs it after 1 second.

### ▼ Code

```
function delayedCall(fn: () => void) {
    setTimeout(fn, 1000);
}

delayedCall(function() {
    console.log("hi there");
})
```

[Copy](#)

## Step 5 - The `tsconfig` file

The `tsconfig` file has a bunch of options that you can change to change the compilation process.

Some of these include

## 1. target

The `target` option in a `tsconfig.json` file specifies the ECMAScript target version to which the TypeScript compiler will compile the TypeScript code.

To try it out, try compiling the following code for target being `ES5` and `es2020`

```
const greet = (name: string) => `Hello, ${name}!`;
```

[Copy](#)

### ▼ Output for ES5

```
"use strict";  
var greet = function (name) { return "Hello, ".concat(name, ' ';
```

[Copy](#)

### ▼ Output for ES2020

```
"use strict";  
const greet = (name) => `Hello, ${name}!`;
```

[Copy](#)

## 2. rootDir

Where should the compiler look for `.ts` files. Good practise is for this to be the `src` folder

## 3. outDir

Where should the compiler look for spit out the `.js` files.

## 4. noImplicitAny

Try enabling it and see the compilation errors on the following code -

```
const greet = (name) => `Hello, ${name}!`;
```

[Copy](#)

Then try disabling it

## 5. removeComments

Weather or not to include comments in the final `.js` file



# Step 6 - Interfaces

## 1. What are interfaces

How can you assign types to objects? For example, a user object that looks like this -

```
const user = {  
  firstName: "harkirat",  
  lastName: "singh",  
  email: "email@gmail.com",  
  age: 21,  
}
```

[Copy](#)

To assign a type to the `user` object, you can use `interfaces`

```
interface User {  
  firstName: string;  
  lastName: string;  
  email: string;  
  age: number;  
}
```

[Copy](#)

Assignment #1 - Create a function `isLegal` that returns true or false if a user is above 18. It takes a user as an input.

### ▼ Solution

```
interface User {  
  firstName: string;  
  lastName: string;  
  email: string;  
  age: number;  
}  
  
function isLegal(user: User) {  
  if (user.age > 18) {  
    return true  
  } else {  
    return false;  
  }  
}
```

[Copy](#)

Assignment #2 - Create a React component that takes todos as an input and renders them



Select typescript when initialising the react project using `npm create vite@latest`

### ▼ Solution

```
// Todo.tsx
interface TodoType {
  title: string;
  description: string;
  done: boolean;
}

interface TodoInput {
  todo: TodoType;
}

function Todo({ todo }: TodoInput) {
  return <div>
    <h1>{todo.title}</h1>
    <h2>{todo.description}</h2>

  </div>
}
```

[Copy](#)

## 2. Implementing interfaces

Interfaces have another special property. You can `implement` interfaces as a class.

Let's say you have an person `interface` -

```
interface Person {
  name: string;
  age: number;
  greet(phrase: string): void;
}
```

[Copy](#)

You can create a class which `implements` this interface.

```
class Employee implements Person {
  name: string;
  age: number;

  constructor(n: string, a: number) {
```

[Copy](#)

```
    this.name = n;
    this.age = a;
  }

  greet(phrase: string) {
    console.log(`${phrase} ${this.name}`);
  }
}
```

This is useful since now you can create multiple **variants** of a person (Manager, CEO ...)

## Summary

1. You can use **interfaces** to aggregate data
2. You can use interfaces to implement classes from

# Step 7 - Types

## What are types?

Very similar to **interfaces**, types let you **aggregate** data together.

```
type User = {
  firstName: string;
  lastName: string;
  age: number
}
```

Copy

But they let you do a few other things.

### 1. Unions

Let's say you want to print the **id** of a user, which can be a number or a string.



You can not do this using `interfaces`

```
type StringOrNumber = string | number;

function printId(id: StringOrNumber) {
  console.log(`ID: ${id}`);
}

printId(101); // ID: 101
printId("202"); // ID: 202
```

[Copy](#)

## 2. Intersection

What if you want to create a type that has every property of multiple `types` / `interfaces`



You can not do this using `interfaces`

```
type Employee = {
  name: string;
  startDate: Date;
};

type Manager = {
  name: string;
  department: string;
};

type TeamLead = Employee & Manager;

const teamLead: TeamLead = {
  name: "harkirat",
  startDate: new Date(),
  department: "Software developer"
};
```

[Copy](#)

# Step 8 - Arrays in TS

If you want to access arrays in typescript, it's as simple as adding a `[]` annotation next to the type

## Example 1

Given an array of positive integers as input, return the maximum value in the array

### ▼ Solution

```
function maxValue(arr: number[]) {  
    let max = 0;  
    for (let i = 0; i < arr.length; i++) {  
        if (arr[i] > max) {  
            max = arr[i]  
        }  
    }  
    return max;  
}  
  
console.log(maxValue([1, 2, 3]));
```

[Copy](#)

## Example 2

Given a list of users, filter out the users that are legal (greater than 18 years of age)

```
interface User {  
    firstName: string;  
    lastName: string;  
    age: number;  
}
```

[Copy](#)

### ▼ Solution

```
interface User {  
    firstName: string;  
    lastName: string;  
    age: number;  
}  
  
function filteredUsers(users: User[]) {  
    return users.filter(x => x.age >= 18);  
}
```

[Copy](#)

```
console.log(filteredUsers([{\n  firstName: "harkirat",\n  lastName: "Singh",\n  age: 21\n}, {\n  firstName: "Raman",\n  lastName: "Singh",\n  age: 16\n}, ]));
```

## Step 9 - Enums

Enums (short for enumerations) in TypeScript are a feature that allows you to define a set of named constants.

The concept behind an enumeration is to create a human-readable way to represent a set of constant values, which might otherwise be represented as numbers or strings.

### Example 1 - Game

Let's say you have a game where you have to perform an action based on weather the user has pressed the `up` arrow key, `down` arrow key, `left` arrow key or `right` arrow key.

```
function doSomething(keyPressed) {\n  // do something.\n}
```

Copy

What should the `type` of `keyPressed` be?

Should it be a string? ( `UP` , `DOWN` , `LEFT` , `RIGHT` ) ?

Should it be numbers? ( `1` , `2` , `3` , `4` ) ?

The best thing to use in such a case is an `enum` .

```
enum Direction {\n  Up,
```

Copy

```
    Down,  
    Left,  
    Right  
}  
  
function doSomething(keyPressed: Direction) {  
    // do something.  
}  
  
doSomething(Direction.Up)
```

This makes code slightly **cleaner** to read out.



The final value stored at **runtime** is still a number (0, 1, 2, 3).


## 2. What values do you see at runtime for **Direction.UP** ?

Try logging **Direction.Up** on screen

▼ Code

```
enum Direction {  
    Up,  
    Down,  
    Left,  
    Right  
}  
  
function doSomething(keyPressed: Direction) {  
    // do something.  
}  
  
doSomething(Direction.Up)  
console.log(Direction.Up)
```

Copy

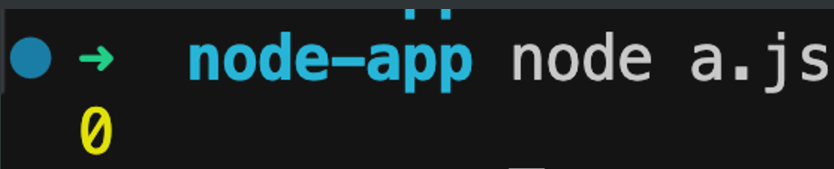


This tells you that by default, **enums** get values as **0**, **1**, **2** ...

## 3. How to change values?

```
enum Direction {  
  Up = 1,  
  Down, // becomes 2 by default  
  Left, // becomes 3  
  Right // becomes 4  
}  
  
function doSomething(keyPressed: Direction) {  
  // do something.  
}  
  
doSomething(Direction.Down)
```

Copy

## ▼ Solution

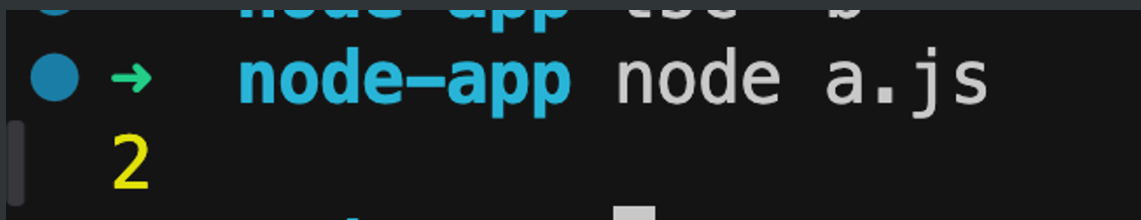

#### 4. Can also be strings

```
enum Direction {  
  Up = "UP",  
  Down = "Down",  
  Left = "Left",  
  Right = 'Right'  
}  
  
function doSomething(keyPressed: Direction) {  
  // do something.  
}  
  
doSomething(Direction.Down)
```

Copy

#### 5. Common usecase in express

```
enum ResponseStatus {  
  Success = 200,  
  NotFound = 404,  
  Error = 500  
}
```

Copy



```
app.get('/', (req, res) => {  
  if (!req.query.userId) {  
    res.status(ResponseStatus.Error).json({})  
  }  
  // and so on...  
  res.status(ResponseStatus.Success).json({});  
})
```

## Step 10 - Generics

Generics are a **language independent** concept (exist in C++ as well)

Let's learn it via an example

### 1. Problem Statement

Let's say you have a function that needs to return the first element of an array. Array can be of type either string or integer.

How would you solve this problem?

#### ▼ Solution

```
function getFirstElement(arr: (string | number)[]) {  
  return arr[0];  
}  
  
const el = getFirstElement([1, 2, 3]);
```

[Copy](#)

### What is the problem in this approach?

#### ▼ User can send different types of values in inputs, without any type errors

```
function getFirstElement(arr: (string | number)[]) {  
  return arr[0];  
}  
  
const el = getFirstElement([1, 2, '3']);
```

[Copy](#)

#### ▼ Typescript isn't able to infer the right type of the return type

```
function getFirstElement(arr: (string | number)[]) {  
    return arr[0];  
}  
  
const el = getFirstElement(["harkiratSingh", "ramanSingh"]);  
console.log(el.toLowerCase());
```

Copy

s a.tsx &gt; ...

```
1 function getFirstElement(arr: (string | number)[]) {  
2     return arr[0];  
3 }  
4  
5 const el = getFirstElement(["harkiratSingh", "ramanSingh"]);  
6 console.log(el.toLowerCase());  
7
```

Property 'toLowerCase' does not exist on type 'string | number'.  
Property 'toLowerCase' does not exist on type 'number'. ts(2339)

any

[View Problem \(\F8\)](#) No quick fixes available

## 2. Solution - Generics

Generics enable you to create components that work with any data type while still providing compile-time type safety.

### Simple example -

#### ▼ Code

```
function identity<T>(arg: T): T {  
    return arg;  
}  
  
let output1 = identity<string>("myString");  
let output2 = identity<number>(100);
```

Copy

JavaScript ▼

```
function identity<T>(arg: T): T {  
    return arg;  
}  
  
let output1 = identity<string>("myString");  
let output2 = identity<number>(100);
```

### 3. Solution to original problem

Can you modify the code of the original problem now to include generics in it?

```
function getFirstElement<T>(arr: T[]) {  
    return arr[0];  
}  
  
const el = getFirstElement(["harkiratSingh", "ramanSingh"]);  
console.log(el.toLowerCase())
```

[Copy](#)

#### Did the issues go away?

▼ User can send different types of values in inputs, without any type errors

```
function getFirstElement<T>(arr: T[]) {  
    return arr[0];  
}  
  
const el = getFirstElement<string>(["harkiratSingh", 2]);  
console.log(el.toLowerCase())
```

[Copy](#)

▼ Typescript isn't able to infer the right type of the return type

```
function getFirstElement<T>(arr: T[]) {  
    return arr[0];  
}  
  
const el = getFirstElement(["harkiratSingh", "ramanSingh"]);  
console.log(el.toLowerCase())
```

[Copy](#)

## Step 11 - Exporting and importing modules

TypeScript follows the ES6 module system, using `import` and `export` statements to share code between different files. Here's a brief overview of how this works:

## 1. Constant exports

math.ts

```
export function add(x: number, y: number): number {  
    return x + y;  
}  
  
export function subtract(x: number, y: number): number {  
    return x - y;  
}
```

Copy

main.ts

```
import { add } from "./math"  
  
add(1, 2)
```

Copy

## 2. Default exports

```
export default class Calculator {  
    add(x: number, y: number): number {  
        return x + y;  
    }  
}
```

Copy

calculator.ts

```
import Calculator from './Calculator';  
  
const calc = new Calculator();  
console.log(calc.add(10, 5));
```

Copy