



NITTE
(Deemed to be University)

**NMAM INSTITUTE
OF TECHNOLOGY**

(An off-Campus Institution of NITTE (DEEMED TO BE UNIVERSITY), MANGALORE)

Department of MCA

27-04-2026

ADVANCED WEB TECHNOLOGIES LAB ASSIGNMENT 7

1. Create an HTML document that includes a paragraph of text and a button. When button is clicked, paragraph should be moved to a place whose x and y coordinates are inputted in text boxes.

```
<!DOCTYPE html>
<html>

<head>
  <title>Move Paragraph</title>
  <style>
    #para {
      position: absolute;
    }
  </style>
</head>

<body>

  X: <input type="number" id="x">
  Y: <input type="number" id="y">
  <button onclick="movePara()">Move</button>


  <p id="para">This is a movable paragraph.</p>

  <script>
    function movePara() {
      let x = document.getElementById("x").value;
      let y = document.getElementById("y").value;
      let p = document.getElementById("para");
      p.style.left = x + "px";
      p.style.top = y + "px";
    }
  </script>
```

</body>

</html>

Output:

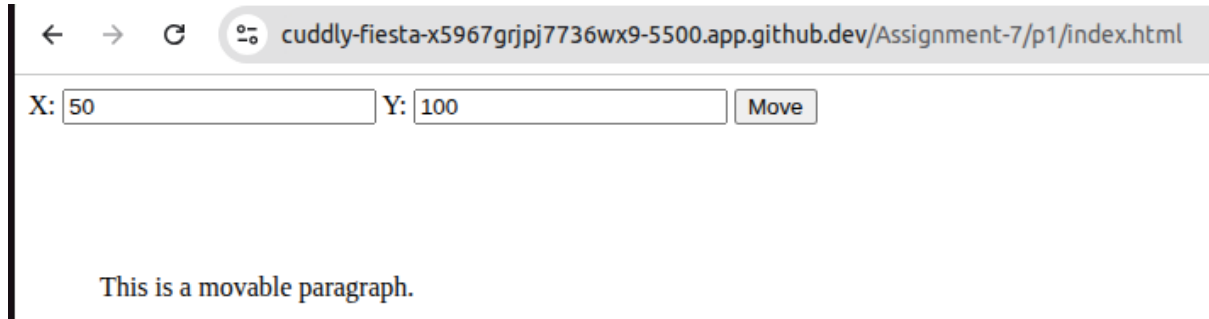

2. Create a form with RegNo, Name, Email ID and Phone Number textboxes. Page should include a help box that displays appropriate message to assist in making entry to the form.

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
  <title>Form with Help Box</title>
```

```
  <style>
```

```
    #help {
```

```
      border: 1px solid #000;
```

```
      padding: 10px;
```

```
      margin-top: 10px;
```

```
      width: 250px;
```

```
    }
```

```
  </style>
```

```
</head>
```

```
<body>
```

```
  <form>
```

```
    RegNo: <input type="text" onfocus="showHelp('Enter your registration number')"><br><br>
```

```
    Name: <input type="text" onfocus="showHelp('Enter your full name')"><br><br>
```

```
    Email: <input type="text" onfocus="showHelp('Enter a valid email ID')"><br><br>
```

```
    Phone: <input type="text" onfocus="showHelp('Enter 10-digit phone number')"><br><br>
```

```
  </form>
```

```
  <div id="help">Help will appear here</div>
```

```
<script>
  function showHelp(msg) {
    document.getElementById("help").innerText = msg;
  }
</script>
```

```
</body>
```

```
</html>
```

Output:



A screenshot of a web browser window. The address bar shows the URL: `cuddly-fiesta-x5967grjpj7736wx9-5500.app.github.dev/Assignment-7/p2/index.html`. The page contains a registration form with the following fields: "RegNo:" with the value "12", "Name:", "Email:", and "Phone:". Below these fields is a button labeled "Enter your registration number".



A screenshot of a web browser window, similar to the one above. The address bar shows the same URL. The registration form now has the "Name:" field filled with the text "Vikas". The "RegNo:" field still contains "12". The "Email:" and "Phone:" fields are empty. The button below the fields is now labeled "Enter your full name".

← → ↻ 🌐 cuddly-fiesta-x5967grjpj7736wx9-5500.app.github.dev/Assignment-7/p2/index.html

RegNo:

Name:

Email:

Phone:

Enter a valid email ID

← → ↻ 🌐 cuddly-fiesta-x5967grjpj7736wx9-5500.app.github.dev/Assignment-7/p2/index.html

RegNo:

Name:

Email:

Phone:

Enter 10-digit phone number

3. Display stacking of four images. When a image is clicked, it should be displayed on top of other paragraphs.

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<title>Image Stacking</title>
```

```
<style>
```

```
img {
```

```
  position: absolute;
```

```
  width: 150px;
```

```
  height: 150px;
```

```
  cursor: pointer;
```

```
}
```

```
</style>
```

```
</head>
```

```
<body>
```

```

```

```

```

```

```

```

```

```
<script>  
  let z = 1;  
  function bringTop(img) {  
    z++;  
    img.style.zIndex = z;  
  }  
</script>
```

```
</body>
```

```
</html>
```

Output:

← → ↻ 🌐 cuddly-fiesta-x5967grjpj7736wx9-5500.app.github.dev/Assignment-7/p3/index.html



← → ↻ 🌐 cuddly-fiesta-x5967grjpj7736wx9-5500.app.github.dev/Assignment-7/p3/index.html





4. Create a page that includes a Heading 'Welcome to NMAMIT,Nitte'. Change the color and font properties of it as mouse is moved over it. Also include a paragraph, on which when mouse is moved mouse pointer's X and Y coordinates with respect to browser should be displayed in text boxes which are included in the page.

```
<!DOCTYPE html>
<html>
```

```
<head>
  <title>Mouse Events</title>
  <style>
    #heading {
      text-align: center;
    }
  </style>
</head>
```

```
<body>
```

```
<h1 id="heading" onmouseover="changeStyle()" onmouseout="resetStyle()">
  Welcome to NMAMIT,Nitte
</h1>
```

```
<p onmousemove="showCoords(event)">
  Move mouse over this paragraph to see X and Y coordinates.
</p>
```

X: <input type="text" id="x" readonly>

Y: <input type="text" id="y" readonly>

```
<script>
function changeStyle() {
  let h = document.getElementById("heading");
  h.style.color = "red";
  h.style.fontFamily = "Arial";
}


function resetStyle() {
  let h = document.getElementById("heading");
  h.style.color = "black";
  h.style.fontFamily = "Times New Roman";
}

function showCoords(e) {
  document.getElementById("x").value = e.clientX;
  document.getElementById("y").value = e.clientY;
}
</script>

</body>

</html>
```

Output:

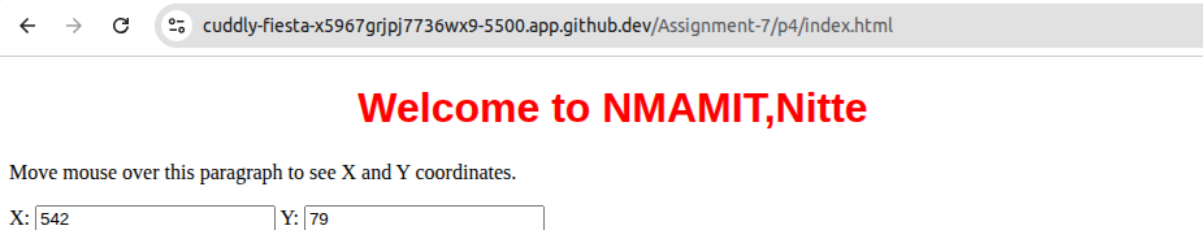

5. Create an HTML document with text ‘Welcome to NMAMAIT Nitte’ which should be moved. The direction of movement is controlled by four buttons: Move Left, Move Down, Move Right and Move Up

```
<!DOCTYPE html>
<html>

<head>
  <title>Move Text</title>
  <style>
    #text {
```

```

    position: absolute;
    left: 100px;
    top: 100px;
    font-size: 20px;
  }
</style>
</head>

<body>

  <p id="text">Welcome to NMAMIT Nitte</p>

  <button onclick="move(-10,0)">Move Left</button>
  <button onclick="move(10,0)">Move Right</button>
  <button onclick="move(0,-10)">Move Up</button>
  <button onclick="move(0,10)">Move Down</button>

  <script>
    let x = 100, y = 100;


    function move(dx, dy) {
      x += dx;
      y += dy;
      let t = document.getElementById("text");
      t.style.left = x + "px";
      t.style.top = y + "px";
    }
  </script>

</body>

</html>

```

Output:

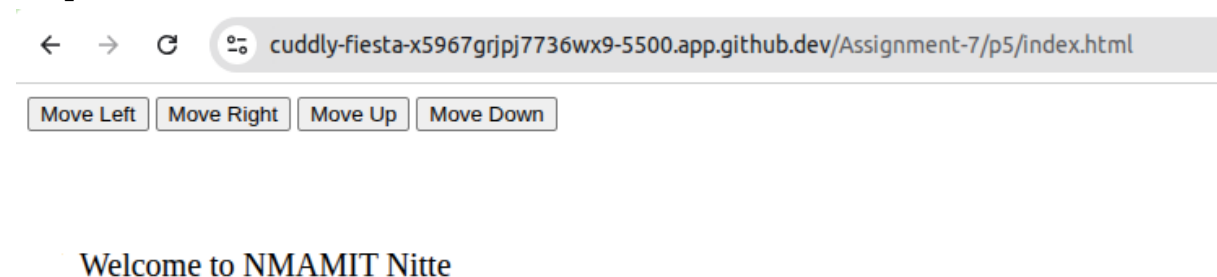

6. Design and develop an HTML application using JavaScript to move a text element to the position of the mouse pointer when the user clicks anywhere on the page(The offsets (-130 for left and -25 for top) modify the actual cursor position so that the message is approximately centered over it)

```
<!DOCTYPE html>
<html>

<head>
  <title>Move Text to Click</title>
  <style>
    #text {
      position: absolute;
      font-size: 20px;
    }
  </style>
</head>

<body onclick="moveText(event)">


  <p id="text">Welcome to NMAMIT Nitte</p>

  <script>
    function moveText(e) {
      let x = e.clientX - 130;
      let y = e.clientY - 25;
      let t = document.getElementById("text");
      t.style.left = x + "px";
      t.style.top = y + "px";
    }
  </script>

</body>

</html>
```

Output:

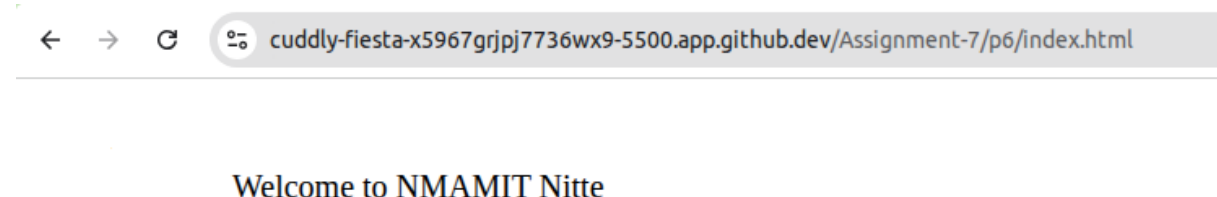

7. Write an HTML and JavaScript program to place a text element at an initial position and, upon clicking a button, move the text to a different position using appropriate styling and scripting.

```
<!DOCTYPE html>
<html>

<head>
  <title>Move Text</title>
  <style>
    #text {
      position: absolute;
      left: 100px;
      top: 100px;
    }
  </style>
</head>

<body>

  <p id="text">Welcome to NMAMIT Nitte</p>

  <button onclick="moveText()">Move Text</button>

  <script>
    function moveText() {
      document.getElementById("text").style.left = "300px";
      document.getElementById("text").style.top = "200px";
    }
  </script>

</body>

</html>
```

Output:

