

Add a New Client

Everything it takes to put a new organisation live — its AI assistant, its pin on the map, its properties, its dashboard and its place in the matching engine — and how to tell each part worked.

5

STEPS END TO END

~\$0.22

RESEARCH COST

1

OBJECTID, SHARED BY ALL

5000 · 5002

LOCAL PORTS

AD_AI2

MAP LAYER

The short version

If you already know the tools.

1

Duplicate a chatbot

At dash.elfsight.com, duplicate an existing widget, point it at the client's website, publish it, and copy its **Share by Link** URL.

2

Put them on the map

One row in `FL_Add_Client_Template.csv`, uploaded to **AD_AI2** in ArcGIS Online. **The OBJECTID you choose here is the dash ID every later step uses.**

3

Harvest their properties

Only if the client lists any. `Start_Scraper.bat` → localhost:5000, register the account against that dash ID, run it.

4

Build the dashboard record

`Start_Organizations.bat` → localhost:5002. Supply five fields, research the other thirty, save, then Put both data files in Dreamweaver.

5

Tell the matching engine

Add the organisation to `edo_master_table_dual.json`, rebuild the routing indexes, push. Skip this and the client is visible everywhere but never receives a lead.

CHOOSE THE OBJECTID FIRST

Steps 2 to 5 are four separate systems that agree on one thing: a number. Decide it at step 2, write it down, and use the same value in every tool afterwards. Nothing validates this for you — each system will happily accept a different number and simply fail to join up.

NOTHING HERE PUBLISHES ITSELF

Elfsight goes live when you press [Publish](#). ArcGIS goes live on upload. The dashboard goes live when you Put the files in Dreamweaver. The engine goes live when Railway redeploys. Four separate acts of publishing, and a client half-added is the normal failure.

Before you start

Five minutes of gathering saves restarting at step 3.

YOU NEED	FOR
The client's website URL	Seeds the chatbot's knowledge base (step 1) and becomes the value (steps 2 and 4) Embed
Their property-search URL , if they have one	Step 3. If they have no property database, skip that step entirely.
Elfsight sign-in	Step 1. Check the widget allowance on the way in — the header shows it, e.g. 392 / 400.
ArcGIS Online sign-in — user FastFacility1	Step 2
Anthropic API credit	Step 4 researches thirty fields for about \$0.22. Click Test API keys before you begin, not during.
Dreamweaver	Publishing the dashboard files in step 4

THE ARCGIS PASSWORD IS NOT IN THIS DOCUMENT

Deliberately. This runbook is version-controlled and sits in a web-served folder, so a password written here is a password published. Keep it in your password manager alongside the Elfsight and Anthropic credentials.

Step 1 · The AI assistant

Elfsight. The output of this step is a single URL, and everything else in it exists to produce that URL.

1

Duplicate an existing chatbot

Sign in to dash.elfsight.com/apps/ai-chatbot, pick a widget you are happy with, and choose **Duplicate** from its **...** menu.

Duplicate rather than **Create Widget** : the copy inherits the placement, theme, visibility and email settings already tuned for FastLocations, so the only thing left to change is the knowledge base.

AI Chatbot

ENTERPRISE T4

WIDGETS 391 / 400

VIEWS Unlimited

MESSAGES 47 / 20,000

RESETS ON SEP 25

Widgets

Request a Feature

What's New

⌵ ⌴

Search widgets...

+ Create Widget

WIDGET NAME	PROJECT	LAST MODIFIED	ACTIONS
 Iowa Interstate Railroad, IA	FastLocations	17 hours ago	Results ⁵ Edit Install ...
 Vancouver, BC	FastLocations	Sep 9, 2026	Re Embed Code <>
 FastLocations	FastLocations	Sep 4, 2026	Re Share by Link
 REDI Cincinnati	FastLocations	Aug 25, 2026	Re Move to Another Project...
 National Grid, NY	FastLocations	Jul 19, 2026	Re Remove from Project
 Greenville Area Development, SC	FastLocations	Jul 18, 2026	Re Duplicate
 Southeast NB	FastLocations	Jul 18, 2026	Re Rename widget
 SC DoC	FastLocations	Jul 18, 2026	Re Hide from Website
			Re Delete Widget

The ... menu on any existing widget → Duplicate.

Open the copy

It appears at the top of the list as *<name> Copy*, with its project showing as **—**. Click **Edit**.

AI Chatbot

ENTERPRISE T4

WIDGETS 392 / 400

VIEWS ∞ Unlimited

MESSAGES 47 / 20,000

RESETS ON SEP 25

Widgets

Request a Feature

What's New

☰ ↑↓

Search widgets...

+ Create Widget

WIDGET NAME	PROJECT	LAST MODIFIED	ACTIONS
 Iowa Interstate Railroad, IA Copy	—	Just Now	Results Edit Install ...

The duplicate arrives unassigned – note the project column reads “—”.

Point it at the client's site

Paste the client's URL and let Elfsight scan. It reads the site, builds a knowledge base from the content it finds, and shapes a name, icon, role and tone of voice from it.

Create Your AI Agent

yourwebsite.com **Create**

HOW IT WORKS

-  **Scans your website**
Learns your business, products and services
-  **Builds a knowledge base**
Adds available content so the agent can answer questions
-  **Shapes a personality**
Creates a name, icon, role, and tone of voice

Don't have a website? [Enter details manually.](#)

One URL does the work: scan the site, build the knowledge base, shape the personality.

Check the settings, rename, assign, publish

Work through **Placement & Layout**, **Theme**, **Visibility** and **Email Notifications**, then rename the widget from “... Copy” to the client's name and press **Publish**.




ASSIGN IT TO THE FASTLOCATIONS PROJECT

A duplicate is created outside any project. Leave it that way and the widget works perfectly but drops out of the FastLocations list, which is how you find it again in a year. Use **Assign to Project...** in the same **...** menu.

Copy the share link


From the widget's **...** menu choose **Share by Link**, then **Copy Link**. Not **Embed Code** — the map and the dashboard both want a plain URL.

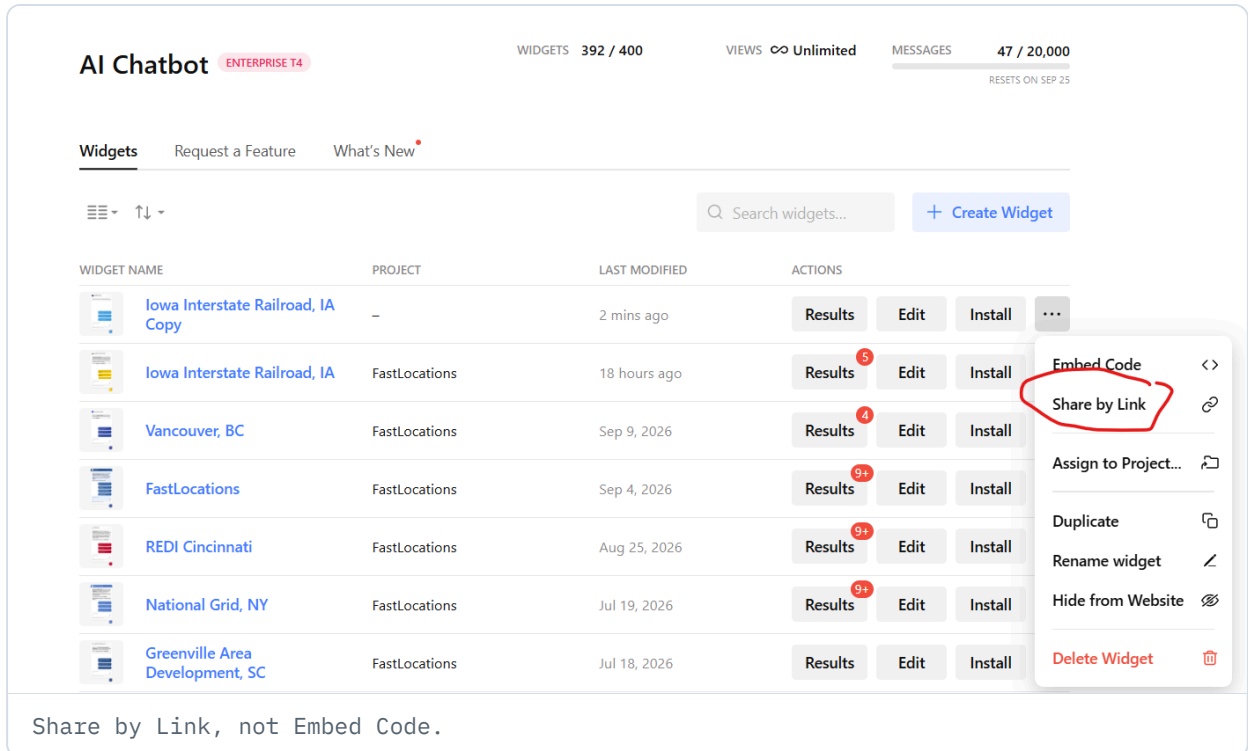

The screenshot shows the 'AI Chatbot' interface with a table of widgets. The 'Iowa Interstate Railroad, IA Copy' widget is selected, and its dropdown menu is open, showing options like 'Embed Code', 'Share by Link', 'Assign to Project...', 'Duplicate', 'Rename widget', 'Hide from Website', and 'Delete Widget'. The 'Share by Link' option is circled in red.

WIDGET NAME	PROJECT	LAST MODIFIED	ACTIONS
Iowa Interstate Railroad, IA Copy	-	2 mins ago	Results Edit Install ...
Iowa Interstate Railroad, IA	FastLocations	18 hours ago	Results ⁵ Edit Install
Vancouver, BC	FastLocations	Sep 9, 2026	Results ⁴ Edit Install
FastLocations	FastLocations	Sep 4, 2026	Results ⁹⁺ Edit Install
REDI Cincinnati	FastLocations	Aug 25, 2026	Results ⁹⁺ Edit Install
National Grid, NY	FastLocations	Jul 19, 2026	Results ⁹⁺ Edit Install
Greenville Area Development, SC	FastLocations	Jul 18, 2026	Results Edit Install

Share by Link, not Embed Code.

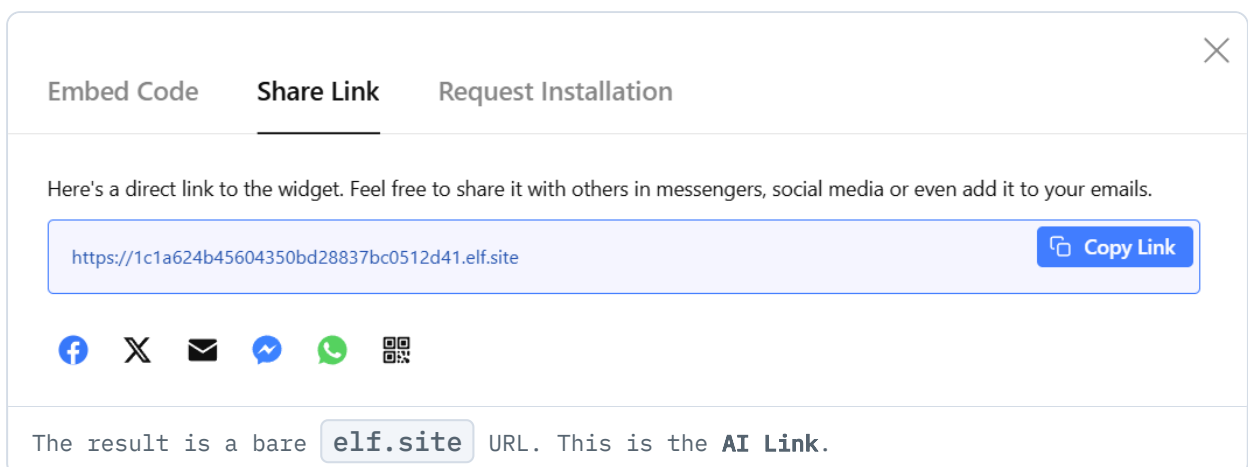

The 'Share Link' dialog box is shown with the 'Share Link' tab selected. It displays a direct link to the widget: `https://1c1a624b45604350bd28837bc0512d41.elf.site`. Below the link are social sharing icons for Facebook, X, Email, Messenger, WhatsApp, and QR code. The text at the bottom states: 'The result is a bare `elf.site` URL. This is the **AI Link**.'

It takes the form `https://1c1a624b45604350bd28837bc0512d41.elf.site`. Keep it on the clipboard — you need it twice, in step 2 and again in step 4.

Step 2 · The map record

ArcGIS Online, the `AD_AI2` hosted feature layer. This is where the OBJECTID is decided.

Fill in the template row

Open `FL_Add_Client_Template.csv` in the FastLocations folder and replace the template values with the client's. Three fields carry more weight than the rest:

FIELD	VALUE
OBJECTID	A new number, larger than the last entry . This becomes the dash ID used by every other system.
AI Link	The <code>elf.site</code> URL from step 1.
Embed	The client's current website URL.

You can stage several clients in one CSV and add them together; the steps below are identical.

Upload it

1 Find the layer

Sign in at arcgis.com, then **Content** → **My favorites** → **AD_AI2**. It is the hosted feature layer, not either of the web maps beside it.

Home

Gallery

Map

Scene

Notebooks

Groups

Content

Organization

Search

Notifications

Menu

Shawn Donnelly
FastFacility1

Content

My content

My favorites

My groups

My organization

Living Atlas

Search My Favorites

Filters

Item type

Maps

Layers

Scenes

Apps

Developer credentials

Tools

Files

Styles

1-13 of 13

Table


Date modified

Title		Modified	Owner			
FastFacility WebMap_AI	Web map	Sep 8, 2026	Shawn Donnelly		★	Preview
NV Energy Property Browser v2	Web experience	Mar 25, 2026	Shawn Donnelly		★	Preview
ShovelReady Fast	Web experience	Mar 13, 2026	Shawn Donnelly		★	Preview
ShovelReady Webmap_2	Web map	Mar 13, 2026	Shawn Donnelly		★	Preview
AD_AI2	Feature layer (hosted)	Mar 4, 2026	Shawn Donnelly		★	Preview
NV Energy Webmap	Web map	Feb 4, 2026	Shawn Donnelly		★	Preview
ShovelReady Webmap	Web map	Sep 26, 2025	Shawn Donnelly		★	Preview

Content → My favorites. AD_AI2 is the *Feature layer (hosted)* row.

2

Open the Data tab

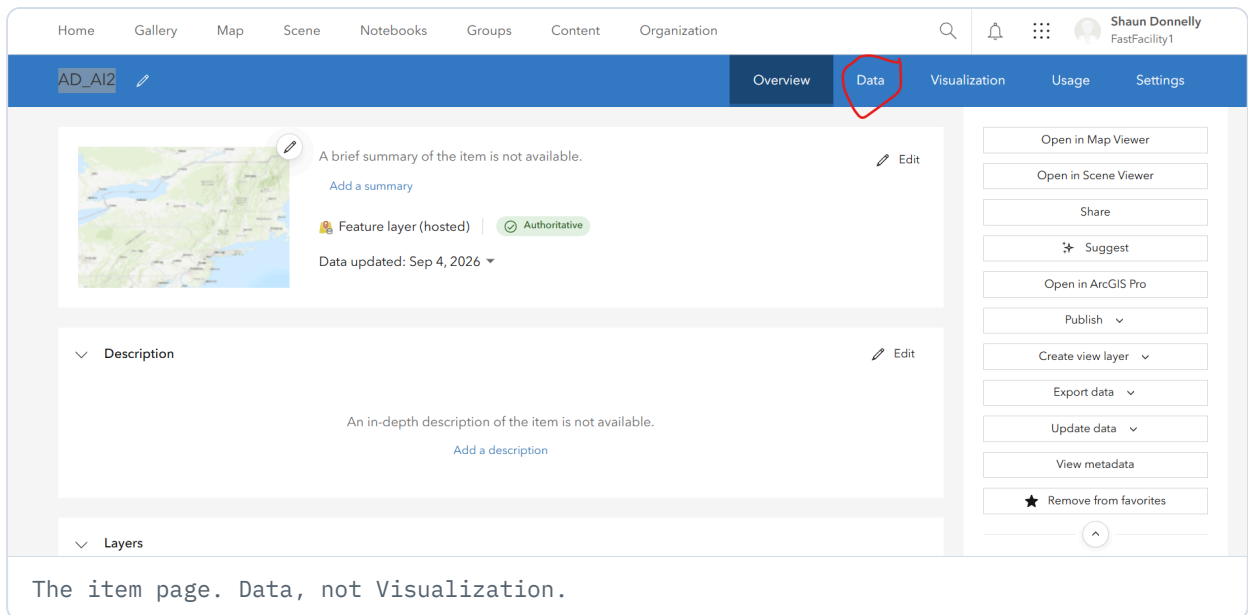

Home Gallery Map Scene Notebooks Groups Content Organization

AD_AI2 Overview **Data** Visualization Usage Settings

A brief summary of the item is not available. [Add a summary](#) [Edit](#)

Feature layer (hosted) Authoritative

Data updated: Sep 4, 2026

Description [Edit](#)

An in-depth description of the item is not available. [Add a description](#)

Layers

Open in Map Viewer

Open in Scene Viewer

Share

Suggest

Open in ArcGIS Pro

Publish

Create view layer

Export data

Update data

View metadata


Remove from favorites

The item page. Data, not Visualization.

3

Update data → Update from a file

In the left column of the table view. The layer underneath is `EDs_ai_XYTableToPoint12a`.

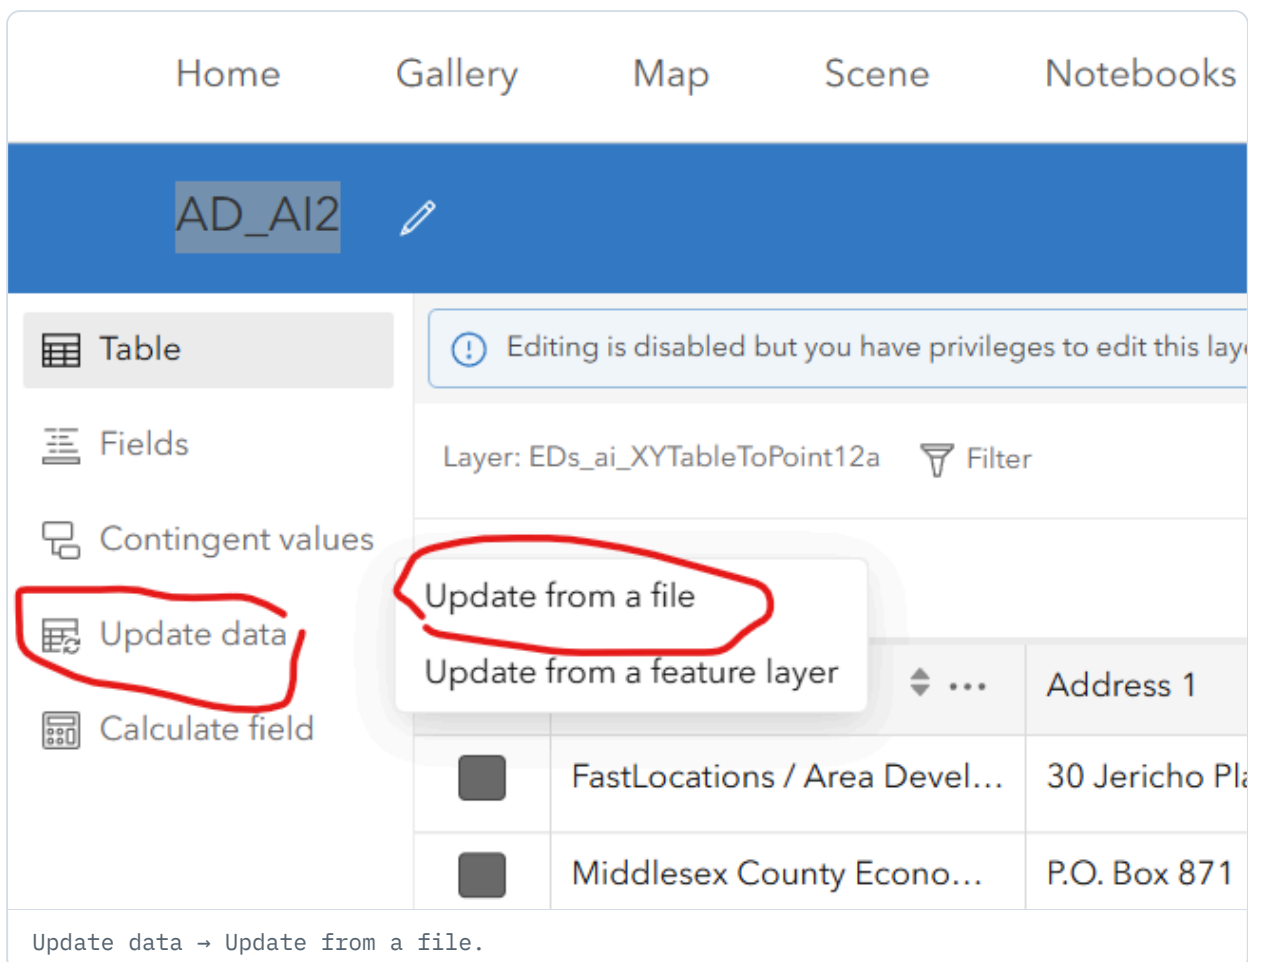

Home Gallery Map Scene Notebooks

AD_AI2

Table

Fields

Contingent values

Update data

Calculate field

Editing is disabled but you have privileges to edit this layer

Layer: EDs_ai_XYTableToPoint12a Filter

Update from a file

Update from a feature layer

Address 1


☐	FastLocations / Area Devel...	30 Jericho Pl
☐	Middlesex County Econo...	P.O. Box 871

Update data → Update from a file.

4

Choose Add features

ArcGIS says it plainly: *this feature service only supports adding new features*. The other three options are greyed out, which is the safeguard working.

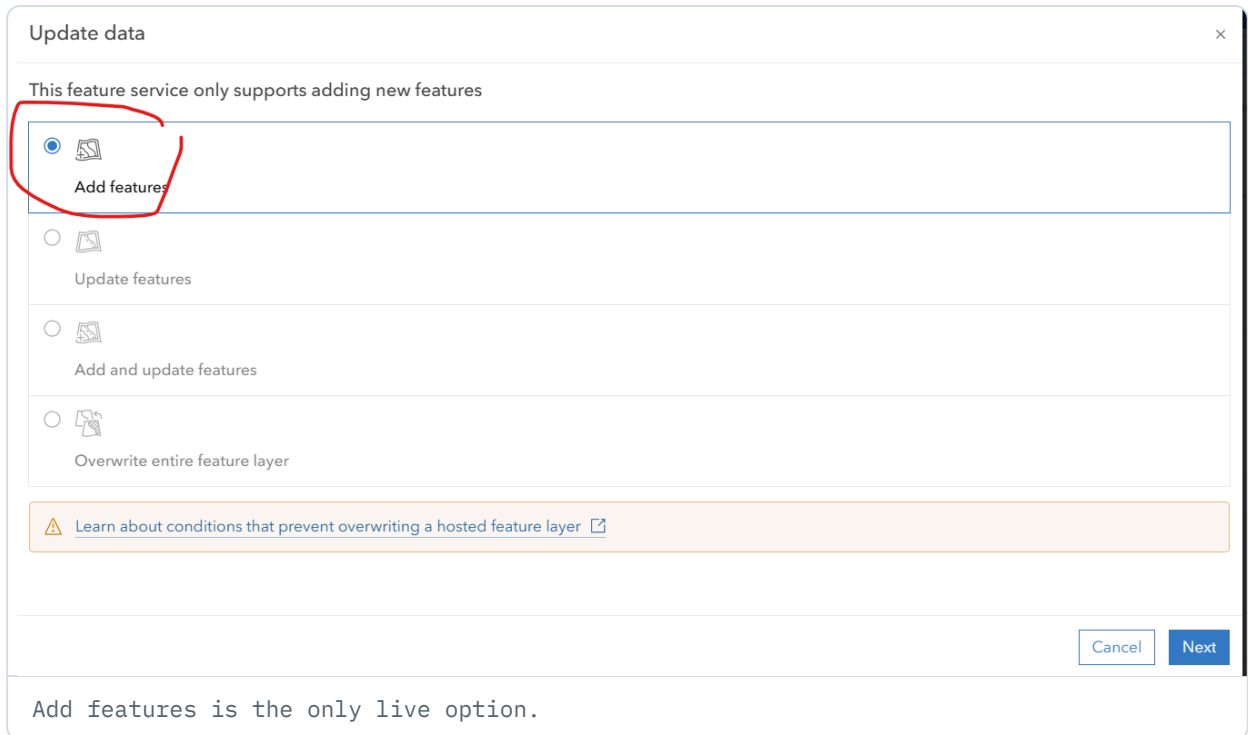

Update data

This feature service only supports adding new features

☒ Add features

☐ Update features

☐ Add and update features

☐ Overwrite entire feature layer

[Learn about conditions that prevent overwriting a hosted feature layer](#)


Cancel Next

Add features is the only live option.

5

Drop in the CSV

Drag the file in or pick it from your computer, then **Next** through the rest. The new row or rows are appended.

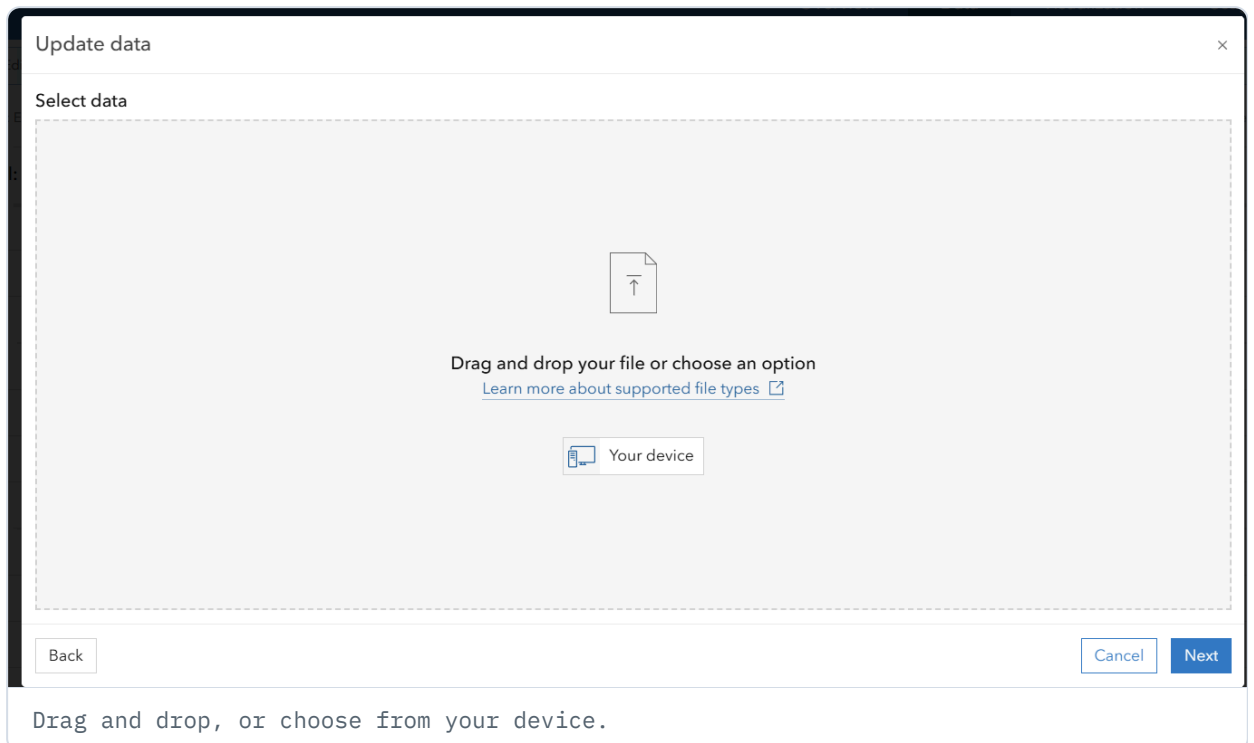

Update data

Select data

Drag and drop your file or choose an option

[Learn more about supported file types](#)

Your device

Back Cancel Next

Drag and drop, or choose from your device.

NEVER REORDER THE CLIENTS IN AD_AI2

Row order in this layer is load-bearing. Add to the end, and only to the end — which is why the OBJECTID must exceed the previous entry and why the service refuses to overwrite. Sorting the CSV before upload, or overwriting the layer to “tidy it up”, breaks the pins.

Step 3 · The properties

Only if the client lists sites or buildings. The full detail is in the *Property Scraper Runbook*; this is what adding one account involves.

Double-click `Start_Scraper.bat` in the FastLocations folder. A black window opens and the browser lands on `localhost:5000`. Leave the window open while you work, and close it when you are done — that is what shuts the tool off.

Register the account

Four boxes at the top of the page:

BOX	WHAT TO ENTER
Property search URL	The client's property or site-search page — or the map/tool URL itself.
dashId	The OBJECTID from step 2. This is what ties the harvested file to the right dashboard.
Label	A readable name, e.g. <i>Hancock EDC</i> .
State / Province	From the dropdown. Required.

`Detect + Add + Run` identifies the platform, registers the account and runs it immediately — the right choice for the browserless platforms. `Detect only` reports what it found without committing, which is worth a click first on an unfamiliar site.

Every run writes the dated JSON file *and* rebuilds `properties_all.json`, the single merged file the website loads. There is no separate publish step for property data.

A NOTE INSTEAD OF A RUN IS NORMAL

Some accounts register but cannot run until a value has been captured from the live site — VEDP regional sites need a property-list capture, ArcGIS Experience and Geocortex apps need their Feature Service URL. The tool says so plainly. Send the URL to Claude; it is typically a one-minute fix, after which the account runs itself on every future refresh.

What runs without a browser

Platforms marked `api` are browserless and fast; `browser` opens a Playwright window that pages through listings and closes itself.

PLATFORM	MODE	NOTES
ZoomProspector	browser	Also branded domains and broker/region filters
Buildings & Sites	browser	Main site and branded <code>*siteselection.com</code> domains
GISWebTechGuru	api	Resolves the Tenant ID automatically
LocationOne	api	Common in Canada too
Resimplifi	api	Needs a county/city filter, set by Claude
Catylist / Moody's	api	Can be scoped to one county
SiteLinkWeb	api	Catylist data behind a Blazor front-end
VEDP (Virginia)	api / Claude	Statewide runs itself; regional sites need a capture
EDSuite (Statamic)	api	Public content API
Tevolution (WordPress)	api	Category-page directory sites
ArcGIS Feature Service / Experience / Geocortex	api / Claude	Experience Builder apps need the service URL captured
ArcGIS StoryMap	api	Pins on an embedded express map
Atlantic4	api	Atlantic Canada certified sites
Custom WordPress (<code>grow_wp</code>)	api	e.g. Grow Laurens County

A STATEWIDE DATABASE IS NOT A LOCAL ONE

Paste a statewide ZoomProspector URL and the tool warns you, because it will pull the entire state. The local EDO's filter is usually applied by JavaScript, so the tool cannot see it. If the client really is statewide, click Run. If you want only their patch, send the URL to Claude to capture the right broker ID or region.

THREE SITES ARE REFUSED ON PURPOSE

LoopNet (CoStar LoopLink) and **realtor.ca** (CREA/MLS) are refused with a clear message: aggressive anti-bot measures, and scraping against their terms. **MapMe** is impractical to automate reliably. If the client's property search is one of these, they get no property dataset — note it and move on to step 4.

If the client's data is a hand-built JSON file rather than a scrape, drop it in `properties\JSON\` and ask Claude to add its `datasets.json` entries. Manual files sit outside the account list, so `Run All` never touches them.

Step 4 · The dashboard record

The Organizations editor. You supply five fields; it researches the other thirty. Full detail in the *Organizations Data Runbook*.

Double-click `Start_Organizations.bat` → `localhost:5002`. Click `Test API keys` before anything else: if Claude shows a cross, top up at console.anthropic.com rather than discovering it mid-record.

The five fields that are yours

Click `+ New record`. Two of these cannot be discovered by any amount of searching, and three of them steer every search that follows:

FIELD	VALUE
OBJECTID	The number from step 2. The tool pre-fills the next free id — type over it. See section 8 .
AI Link	The <code>elf.site</code> URL from step 1.
Organization	The seed everything else is found from. The one field that cannot be blank.
Category	Decides which geography the figures describe — see below. Not cosmetic.
City	Plus <code>State</code> , and <code>Address 1</code> / <code>Address 2</code> if you have them.

Those five start unticked; everything else starts ticked. So `Research ticked fields` is one click that fills the remaining thirty, in three Claude calls, for roughly \$0.22.

SET THE STATE YOURSELF

It is ticked for research by default, but choosing it narrows every subsequent search and rules out a whole class of error — the Arizona Commerce Authority sat in the data as `AR` for a long time. Dozens of places have a “Chamber of Commerce”; City and State are the difference between the right one and a plausible wrong one.

Category decides what “the area” means

This is the quietest way to produce a record that looks right and is useless. The Category picks one of three geographies, and it changes the searches, the instructions and the field rules together:

SCOPE	APPLIES TO	THE FIGURES DESCRIBE
statewide	State Agency	The whole state — not the town the office sits in
territory	A Utility that is the only one of its name in its state	Its service territory
local	Everything else	The city and its county

Get this wrong on a new state agency and you get its host city's population presented as the state's. Ten of the 31 statewide records trip the warning for exactly that reason today.

Read it, then save

Researched values land in the form, not on disk. The badge at the top must read valid: error blocks the save because the dashboard would drop or mis-render the value, while warning only means it looks unlike the rest of the dataset.

The dashboard parses these fields with regular expressions to build its charts, so a value in the wrong *shape* produces an empty chart and no error anywhere. That silent failure is what the validation exists to catch. Read the red message under a field — it names the exact pattern — or copy the wording from a good record in the same state.

Save backs up the whole file to `dash\data\_backups\<timestamp>\` first, then rewrites it. To undo anything at all, copy that backup over `dash\data\organizations.json` and restart the tool.

Publish it

Saving updates your PC. The website serves the old data until you upload, in Dreamweaver, **both** of:

FILE	WHY
dash/data/organizations.json	The records themselves
dash/data/meta.json	Record count and state list, refreshed on every save. The filters read it.

Upload only the records and the filter dropdowns fall out of step with them — the new client is in the file but unreachable from the interface.

NEVER UPLOAD DASH/TOOL/

`orgs_config.json` holds both API keys in plain text. It stays on your PC.

Step 5 · The matching engine

The step that has no button, no warning and no tool — and the one that decides whether the client ever receives a lead.

The dashboard and the scoring engine hold **the same roster of organisations in two different files**, keyed by the same id:

FILE	LIVES ON	READ BY	UPDATED BY STEPS 1–4?
dash/data/organizations.json	The web host	The dashboard	yes — step 4
edo_master_table_dual.json	Railway, in the API	scorer.py	no

Nothing synchronises them. A client added through steps 1 to 4 has a chatbot, a pin, properties and a dashboard — and is invisible to *Where to Expand: My Project*. The matching engine rolls every candidate county up to the EDO customer whose territory covers it, and an organisation absent from the master table serves no territory, so it is never anybody's answer.

Add the row

Each record carries the same identity fields you have already filled in, plus a territory:

```
{
  "objectid": "4571",
  "organization": "Hancock County EDC",
  "category": "Local Development Agency",
  "city": "Findlay",
  "state": "OH",
  "country": "US",
  "latitude": "41.044", "longitude": "-83.650",
  "home_county_fips": "39063",
  "territory_fips": ["39063"],
  "territory_geoids": ["39063"],
  "geo_system": "US_FIPS", "geoid_type": "county_fips",
  "territory_basis": "home_county",
  "embed_url": "https://...", "ai_link": "https://....elf.site"
}
```

`objectid` is a **string**, and it is the same number as everywhere else. `ai_link` and `embed_url` are the two URLs from steps 1 and 2 again.

How the territory is set depends on what the client is:

KIND	TERRITORY
A local agency	Its home county. <code>territory_basis: "home_county"</code> — type it in.
An electric utility	Resolved from EIA-861 by <code>build_utility_territories.py</code> , which writes <code>territory_geoids</code> into the master table.
A regional agency	From <code>regional_edo_members.json</code> via <code>build_regional_territories.py</code> . Add the members there first; without them it keeps a single home county and stays flagged INCOMPLETE .

Rebuild the routing indexes and ship it

```
python build_edo_indexes.py      # master table -> edo_fips_index.json + edo_ca_cd_index.json
git add -A && git commit && git push
```

The two indexes map county FIPS (and Canadian CDUID) to the objectids that serve them. The scorer reads the indexes, not the master table, so a new organisation that is not in them routes to nobody. Railway redeploys from `main`; confirm the deploy carried it:

```
https://fastlocations-scoring-api-production.up.railway.app/health

{"counties":3144,"edos":391,"states_with_incentives":65,"status":"ok"}
```

`edos` should have gone up by one. If it still reads the old number, the deploy has not run or ran from the wrong branch.

THE PROPERTY BONUS USUALLY NEEDS NOTHING

Counties served by an organisation with listed properties get a scoring bonus. If `PROPERTIES_JS_URL` is set, the scorer re-reads the dashboard's `properties.js` every fifteen minutes and resolves the labels itself — so step 3 propagates on its own, with no rebuild and no push. Only if that variable is unset does it fall back to the bundled snapshot, which is when you rerun `build_property_orgs.py` (or the `orgs_with_properties` dataset in the Data Refresh Tool) and push.

RE-CHECK THE REGIONAL BALANCE

`python check_regional_balance.py` reports how evenly the Top 5 spreads across regions and where customer coverage is thin. Worth running after a batch of new clients — it is how you find out that a whole region still has nobody to route to.

One number, five places

The single most common way a client ends up half-added.

WHERE	CALLED	WATCH FOR
FL_Add_Client_Template.csv	OBJECTID	Must be larger than the previous entry
AD_AI2 feature layer	OBJECTID	Appended only, never reordered
Scraper account — port 5000	dashId	Duplicates are blocked; one org's list can feed several dashboards
dash/data/organizations.json	OBJECTID	The tool pre-fills a different number — type over it
edo_master_table_dual.json	objectid	A string, e.g. "4571"

THE PRE-FILLED ID IS THE TRAP

The Organizations editor pre-fills the next free OBJECTID, and its own runbook tells you to accept it — correct advice when you are creating a record from scratch, wrong here. You already chose the number in step 2 and three other systems are using it. Type over the suggestion. If the editor refuses it as a duplicate, that number is genuinely taken and it is step 2 that needs revisiting, not step 4.

Two URLs travel just as far. The **elf.site** link from step 1 is the **AI Link** in the CSV, the **AI Link** in the dashboard record, and **ai_link** in the master table. The client's own website is **Embed** in the CSV and **embed_url** in the master table.

Checking it worked

Five systems, five separate proofs. None of them tells you about the others.

STEP	PROOF
1 Chatbot	The <code>elf.site</code> URL opens and the assistant answers a question about the client's business. The widget shows the FastLocations project, not <code>-</code> .
2 Map	The new row is the last one in AD_AI2's table, with the OBJECTID you chose.
3 Properties	The run logs a record count above zero, and <code>properties_all.json</code> has been rewritten.
4 Dashboard	The badge read <code>valid</code> before saving; both files uploaded; the client appears in the live filter dropdowns.
5 Engine	<code>/health</code> reports <code>edos</code> one higher than before.

THE HONEST END-TO-END TEST

Run a search on *Where to Expand: My Project* that the new client's county should win, and see whether the lead routes to them. That exercises the master table, the routing indexes and the territory in one go — the three things nothing else checks.

When it goes wrong

The failures specific to adding a client. The two tool runbooks cover the rest.

WHAT YOU SEE	WHAT IT MEANS	WHAT TO DO
The chatbot answers about the wrong company	The duplicate's knowledge base was never re-scanned	Edit the widget, paste the client's URL, let it rebuild, publish again
The widget vanished from the FastLocations list	The duplicate was never assigned to a project	Assign to Project... in the ... menu
ArcGIS offers only <i>Add features</i>	Working as intended — the service does not support overwriting	Nothing. Never try to route around it.
“Detection failed: platform not recognised”	A new or JavaScript-injected platform	Send the URL to Claude
“Registered but not run — fill in params first”	Needs a captured value (VEDP region, ArcGIS service URL)	Send the URL to Claude
A property run finishes with 0 records	The site changed, or a session id rotated	Send it to Claude to refresh
“OBJECTID is already used by...”	The number you chose in step 2 was not free	Fix step 2 first, then match it here — do not accept the suggested id
A dashboard field will not clear its 	The value does not match the shape the charts parse	Read the red message; copy the wording from a good record in the same state
The client is on the dashboard but never wins a search	Step 5 was skipped, or the territory is empty	Check <code>/health</code> , then that the objectid appears in <code>edo_fips_index.json</code>
Charts on the client's dashboard are blank	A researched value parsed cleanly but in the wrong shape, or <code>meta.json</code> was not uploaded	Re-open the record and read the badge; upload both files

RELATED RUNBOOKS

Property Scraper Runbook for platforms, filters and regional splits. *Organizations Data Runbook* for bulk research, validation formats and backups. *Data Refresh Runbook* for the datasets behind the score.