


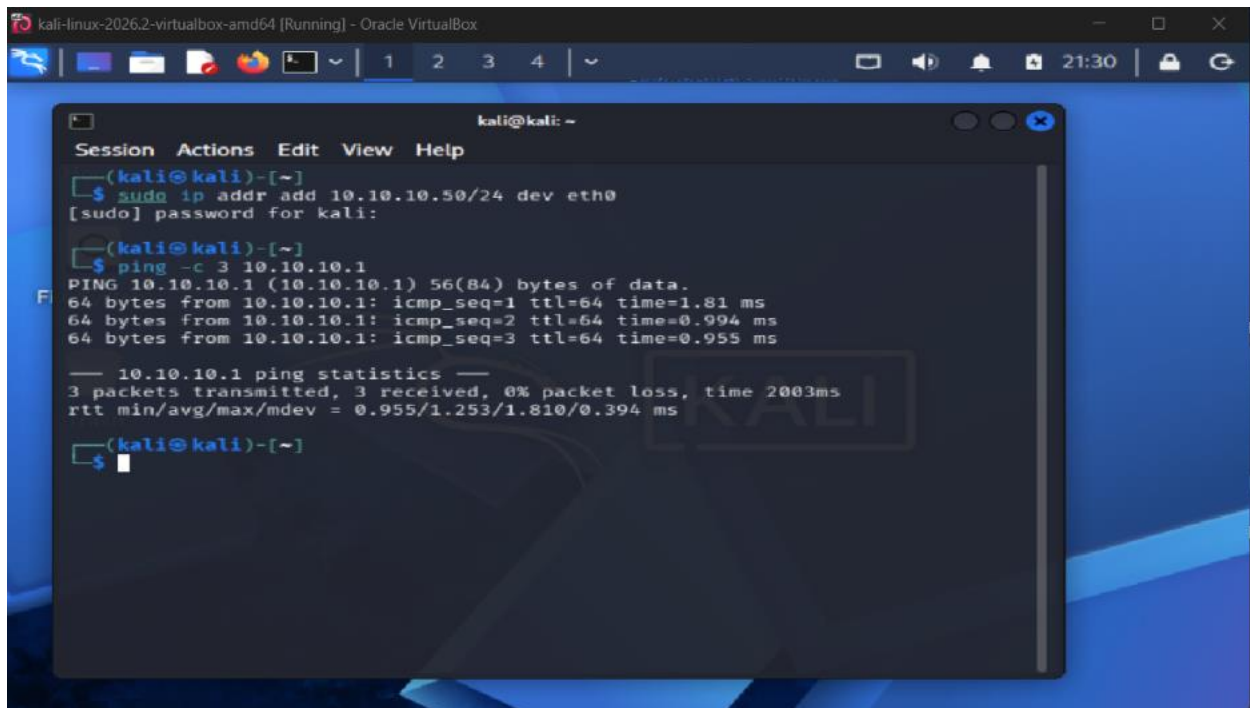

```
kali@kali: ~  
Session Actions Edit View Help  
(kali@kali)-[~]  
$ sudo ip addr add 10.10.10.50/24 dev eth0  
[sudo] password for kali:  
(kali@kali)-[~]  
$ ping -c 3 10.10.10.1  
PING 10.10.10.1 (10.10.10.1) 56(84) bytes of data:  
64 bytes from 10.10.10.1: icmp_seq=1 ttl=64 time=1.81 ms  
64 bytes from 10.10.10.1: icmp_seq=2 ttl=64 time=0.994 ms  
64 bytes from 10.10.10.1: icmp_seq=3 ttl=64 time=0.955 ms  
  
--- 10.10.10.1 ping statistics ---  
3 packets transmitted, 3 received, 0% packet loss, time 2003ms  
rtt min/avg/max/mdev = 0.955/1.253/1.810/0.394 ms  
(kali@kali)-[~]  
$
```

Report: Setting Up the Firewall on Kali Linux

Objective

The goal was to configure the Kali Linux virtual machine (Kali 2026.2 on Oracle VirtualBox) so it could communicate with the firewall on the lab network.

Procedure

A static IP address was assigned to Kali's eth0 interface to place it on the same subnet as the firewall:

bash

```
sudo ip addr add 10.10.10.50/24 dev eth0
```

Connectivity to the firewall at 10.10.10.1 was then tested with three ICMP echo requests:

bash

```
ping -c 3 10.10.10.1
```

Results

All three packets were sent and received, with 0% packet loss. Round-trip times ranged from 0.955 ms to 1.81 ms, averaging 1.253 ms.

Conclusion

Kali was successfully configured with the address 10.10.10.50/24 and can reach the firewall at 10.10.10.1, confirming the network connection is working.