Phase 3 — Database subnet group and RDS, backend-EC2 instance

This phase prepares the private database network placement, configures the managed RDS database, and establishes the private backend EC2 instance that communicates with the database and required AWS services.

Why this phase matters

The DB subnet group defines the private subnets eligible for RDS network interfaces. RDS can remain Single-AZ while its subnet group spans at least two Availability Zones. The backend stays private and should be managed through Systems Manager rather than inbound SSH.

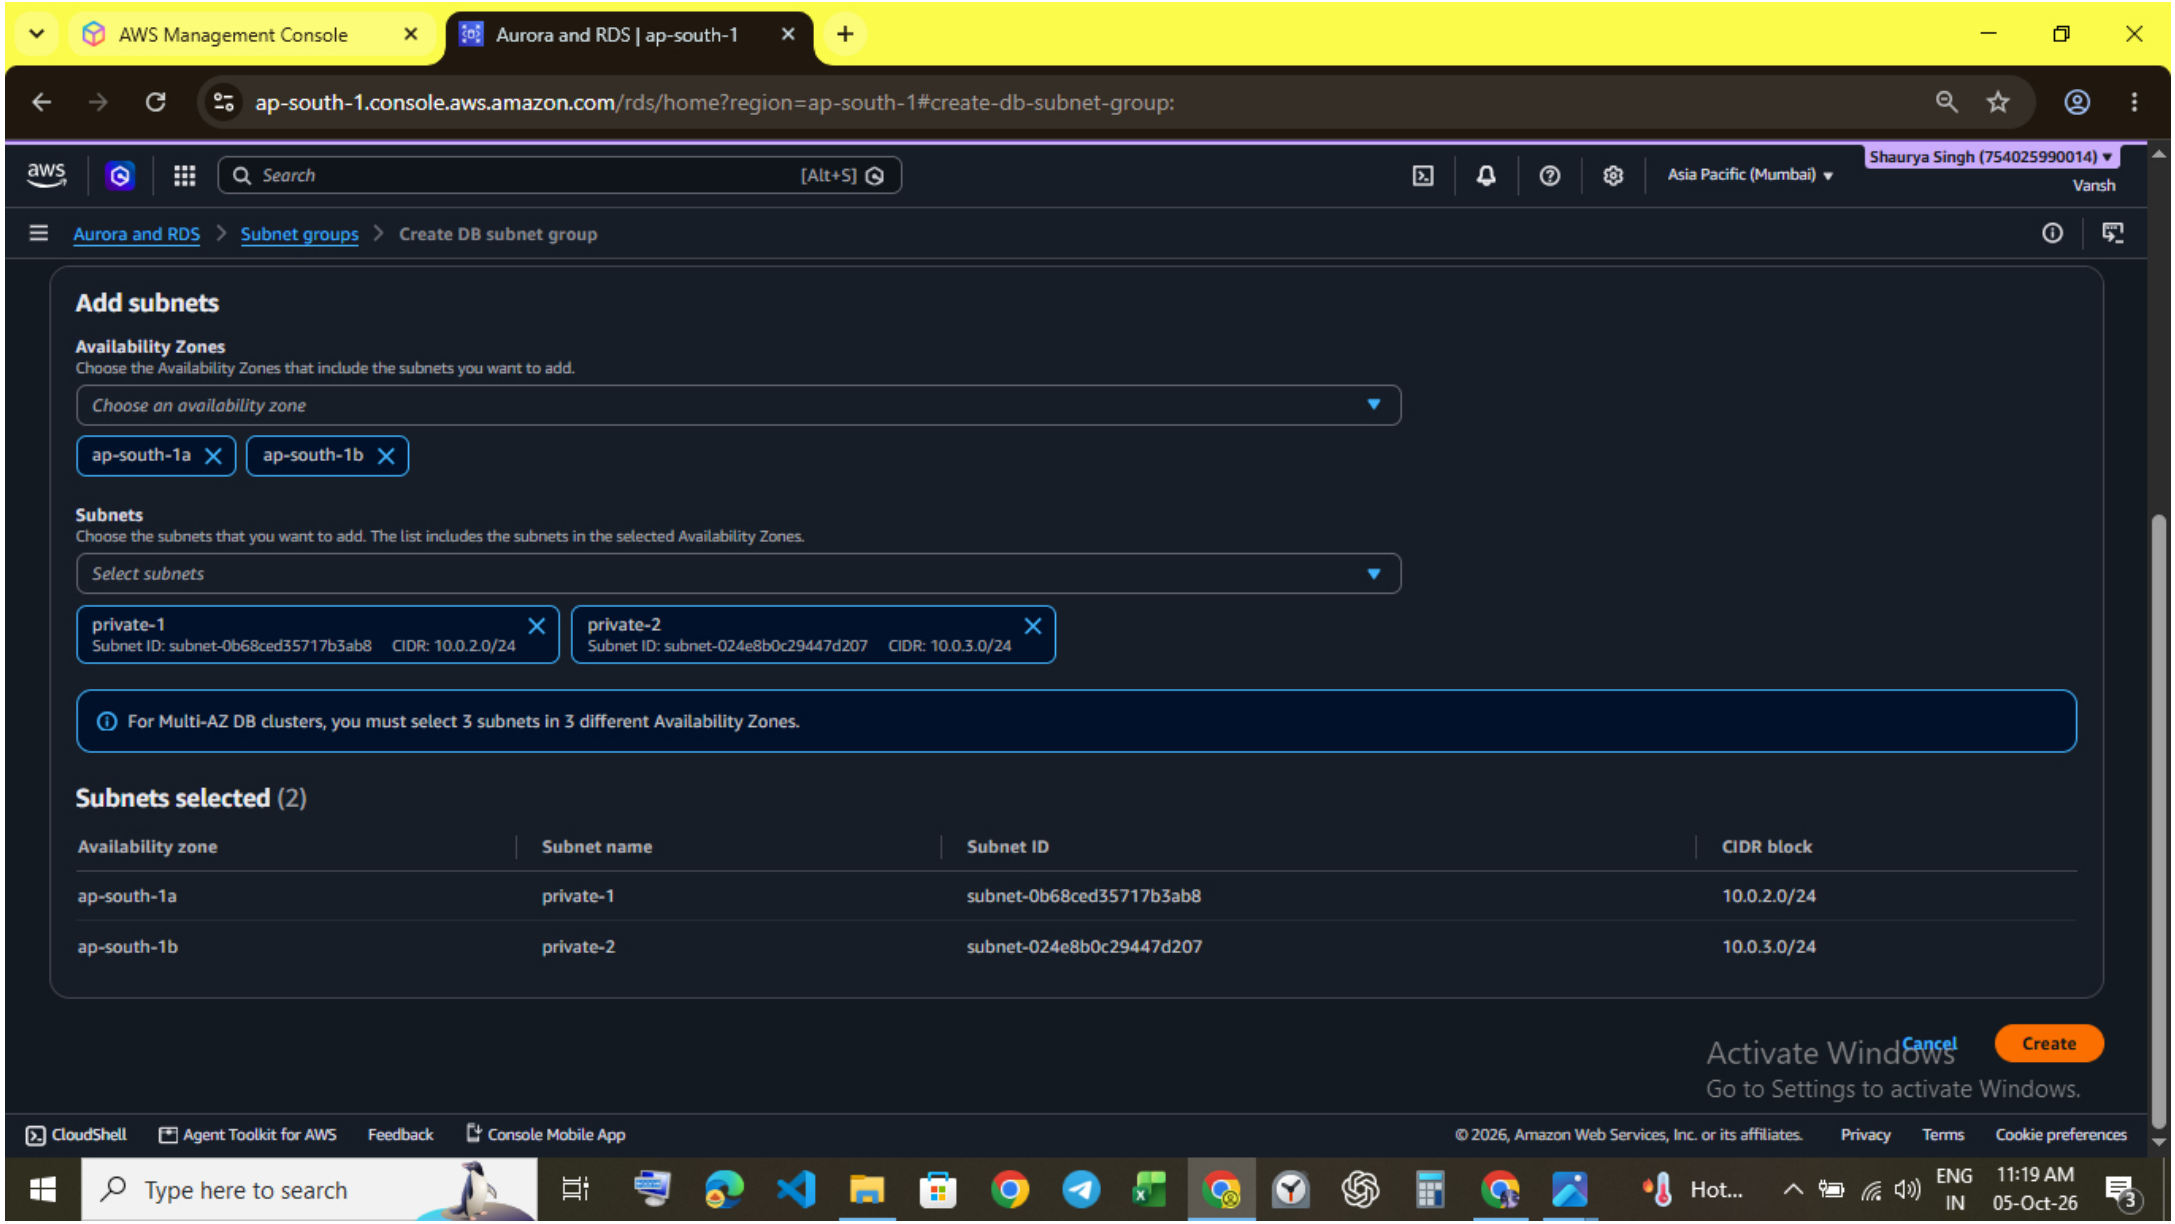
What was configured

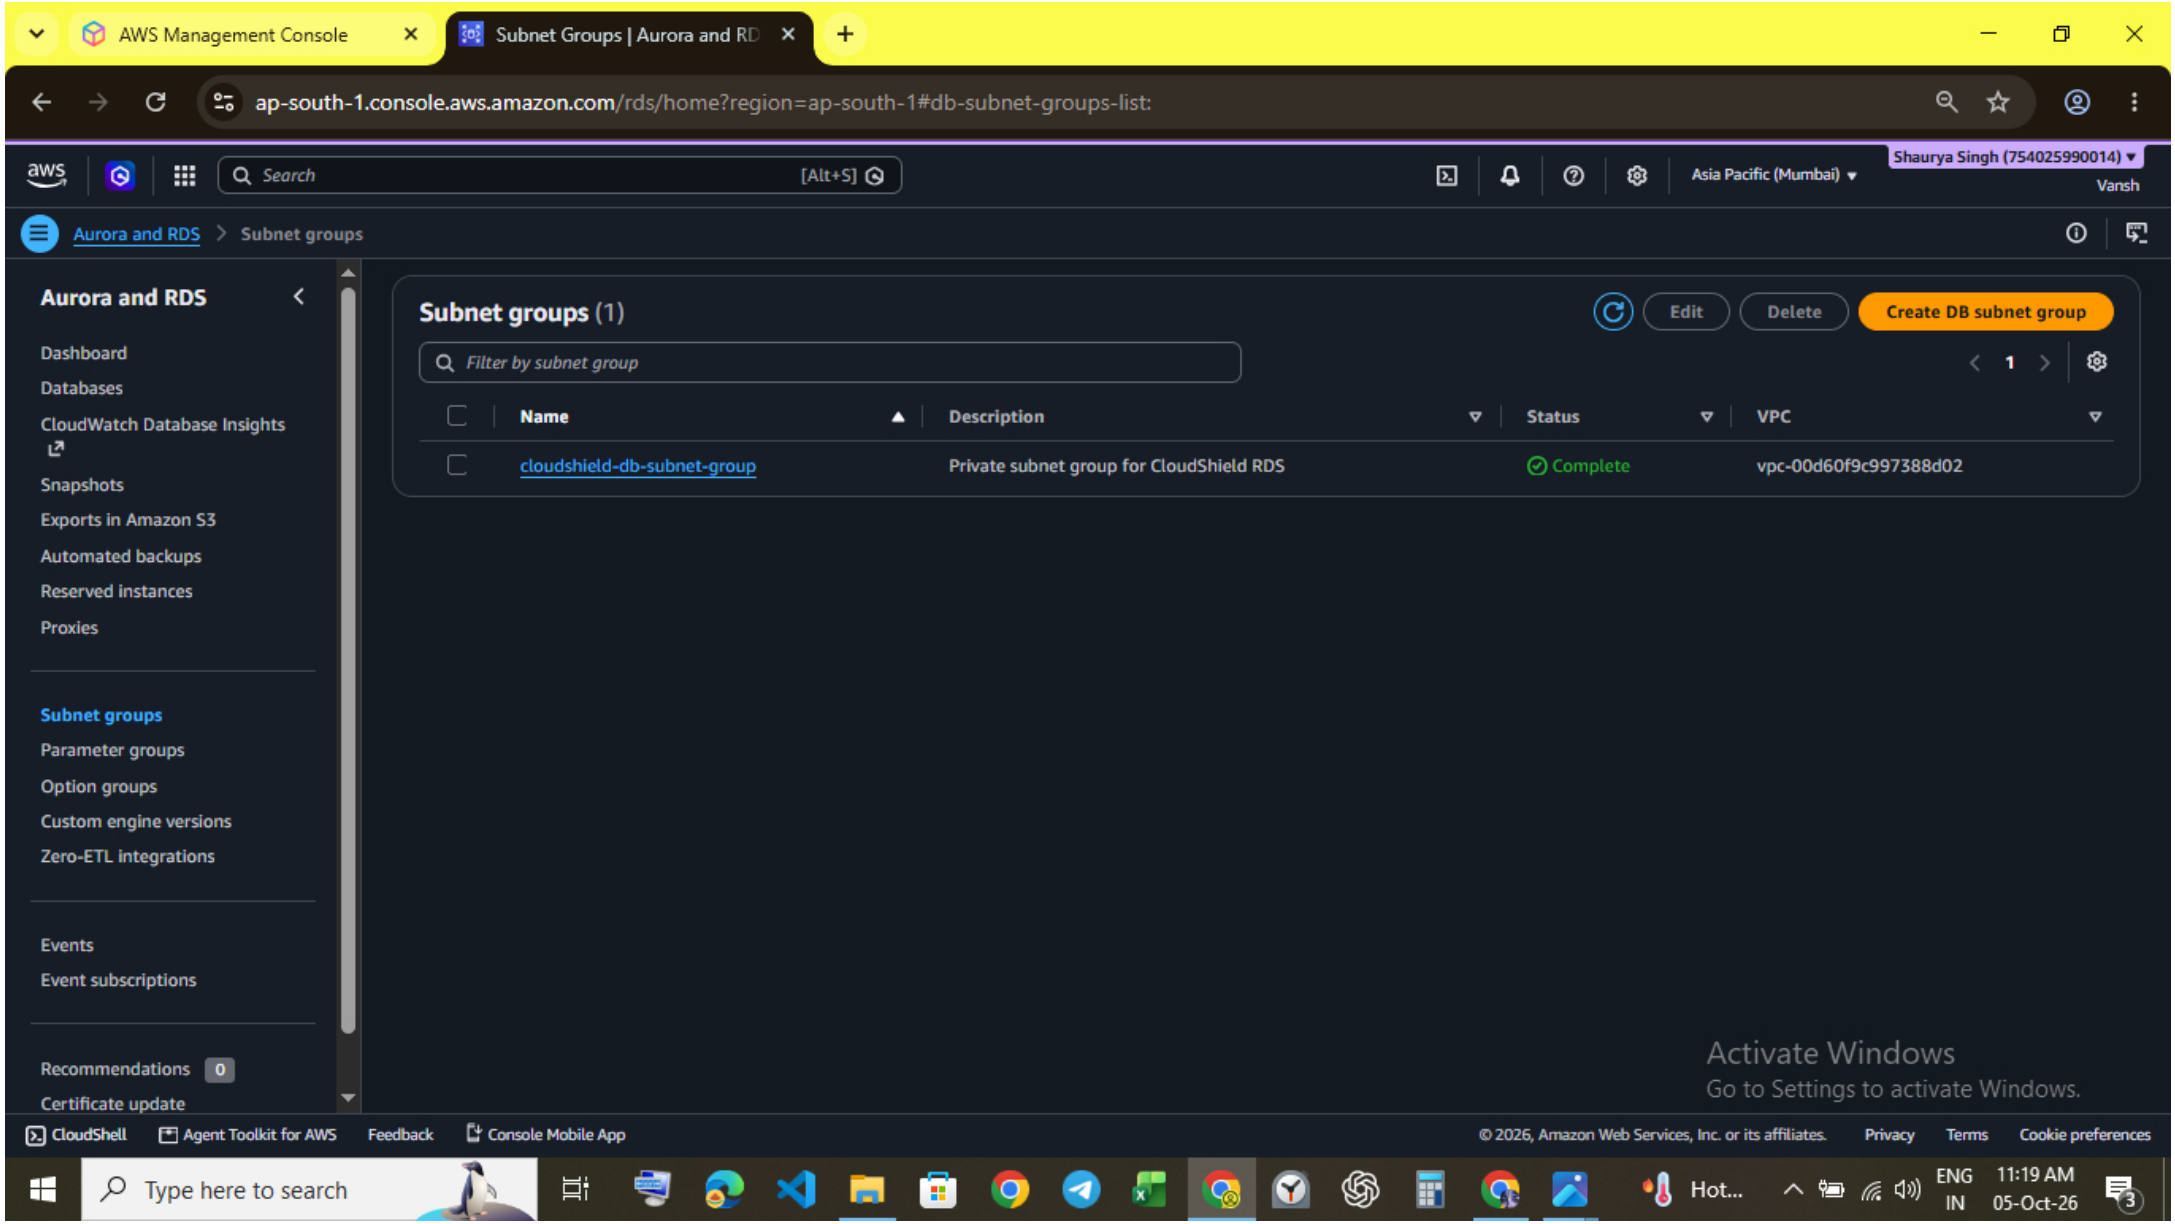
- Created a DB subnet group using private subnet AZ1 and private subnet AZ2.
- Created/configured cloudshield-rds as a managed MySQL database; the architecture reference shows encryption enabled, backups enabled, Single-AZ, and no public access.
- RDS-SG permits the intended backend-to-database connection on TCP 3306.
- Backend EC2: cloudshield-backend in private subnet AZ1, without a public IPv4 address, using CloudShield-Backend-Role.

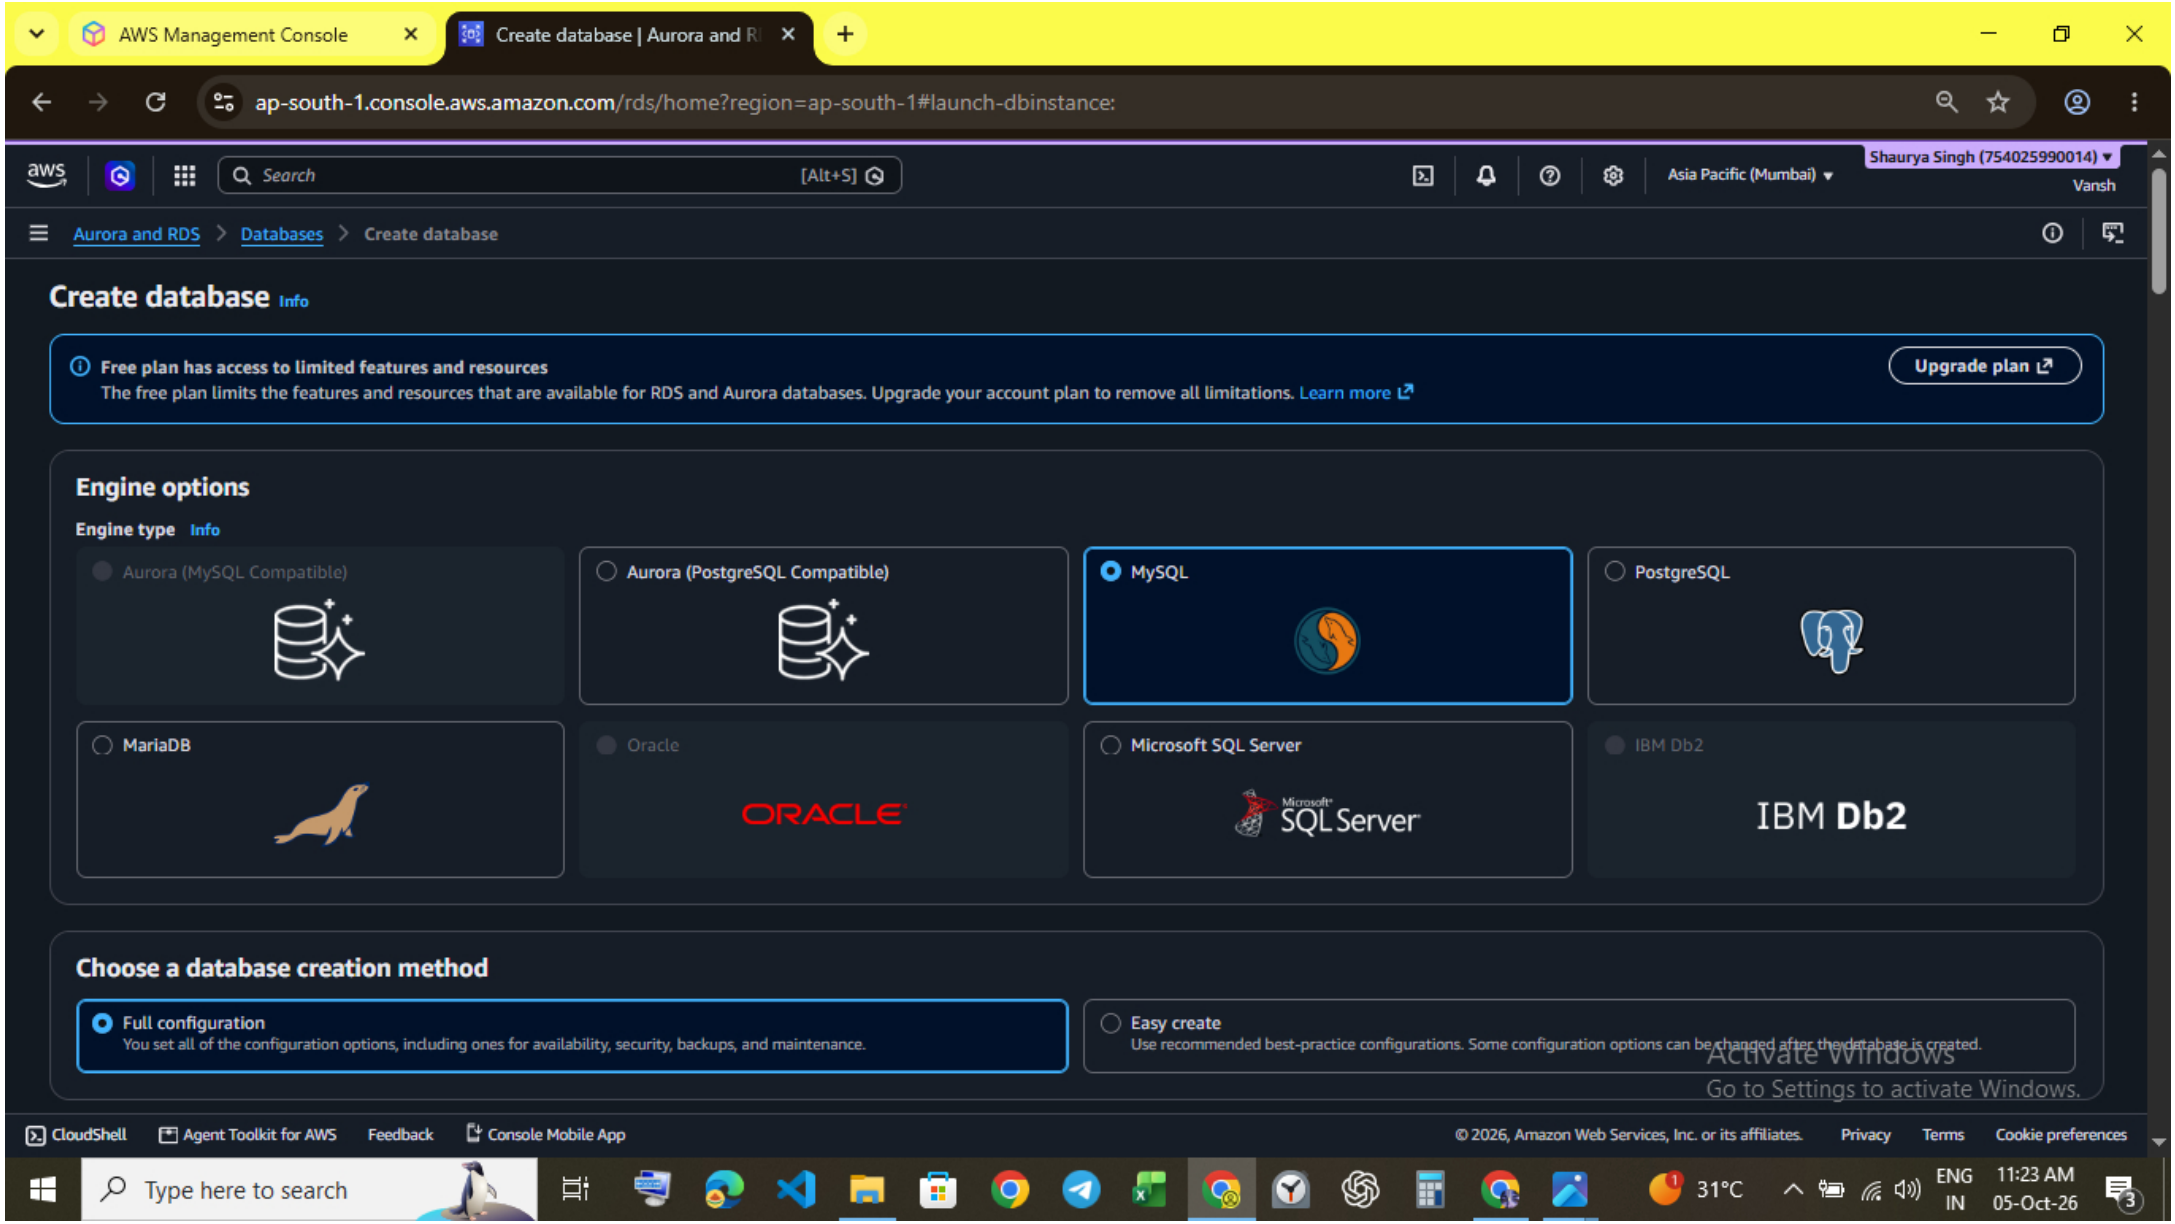
Validation points

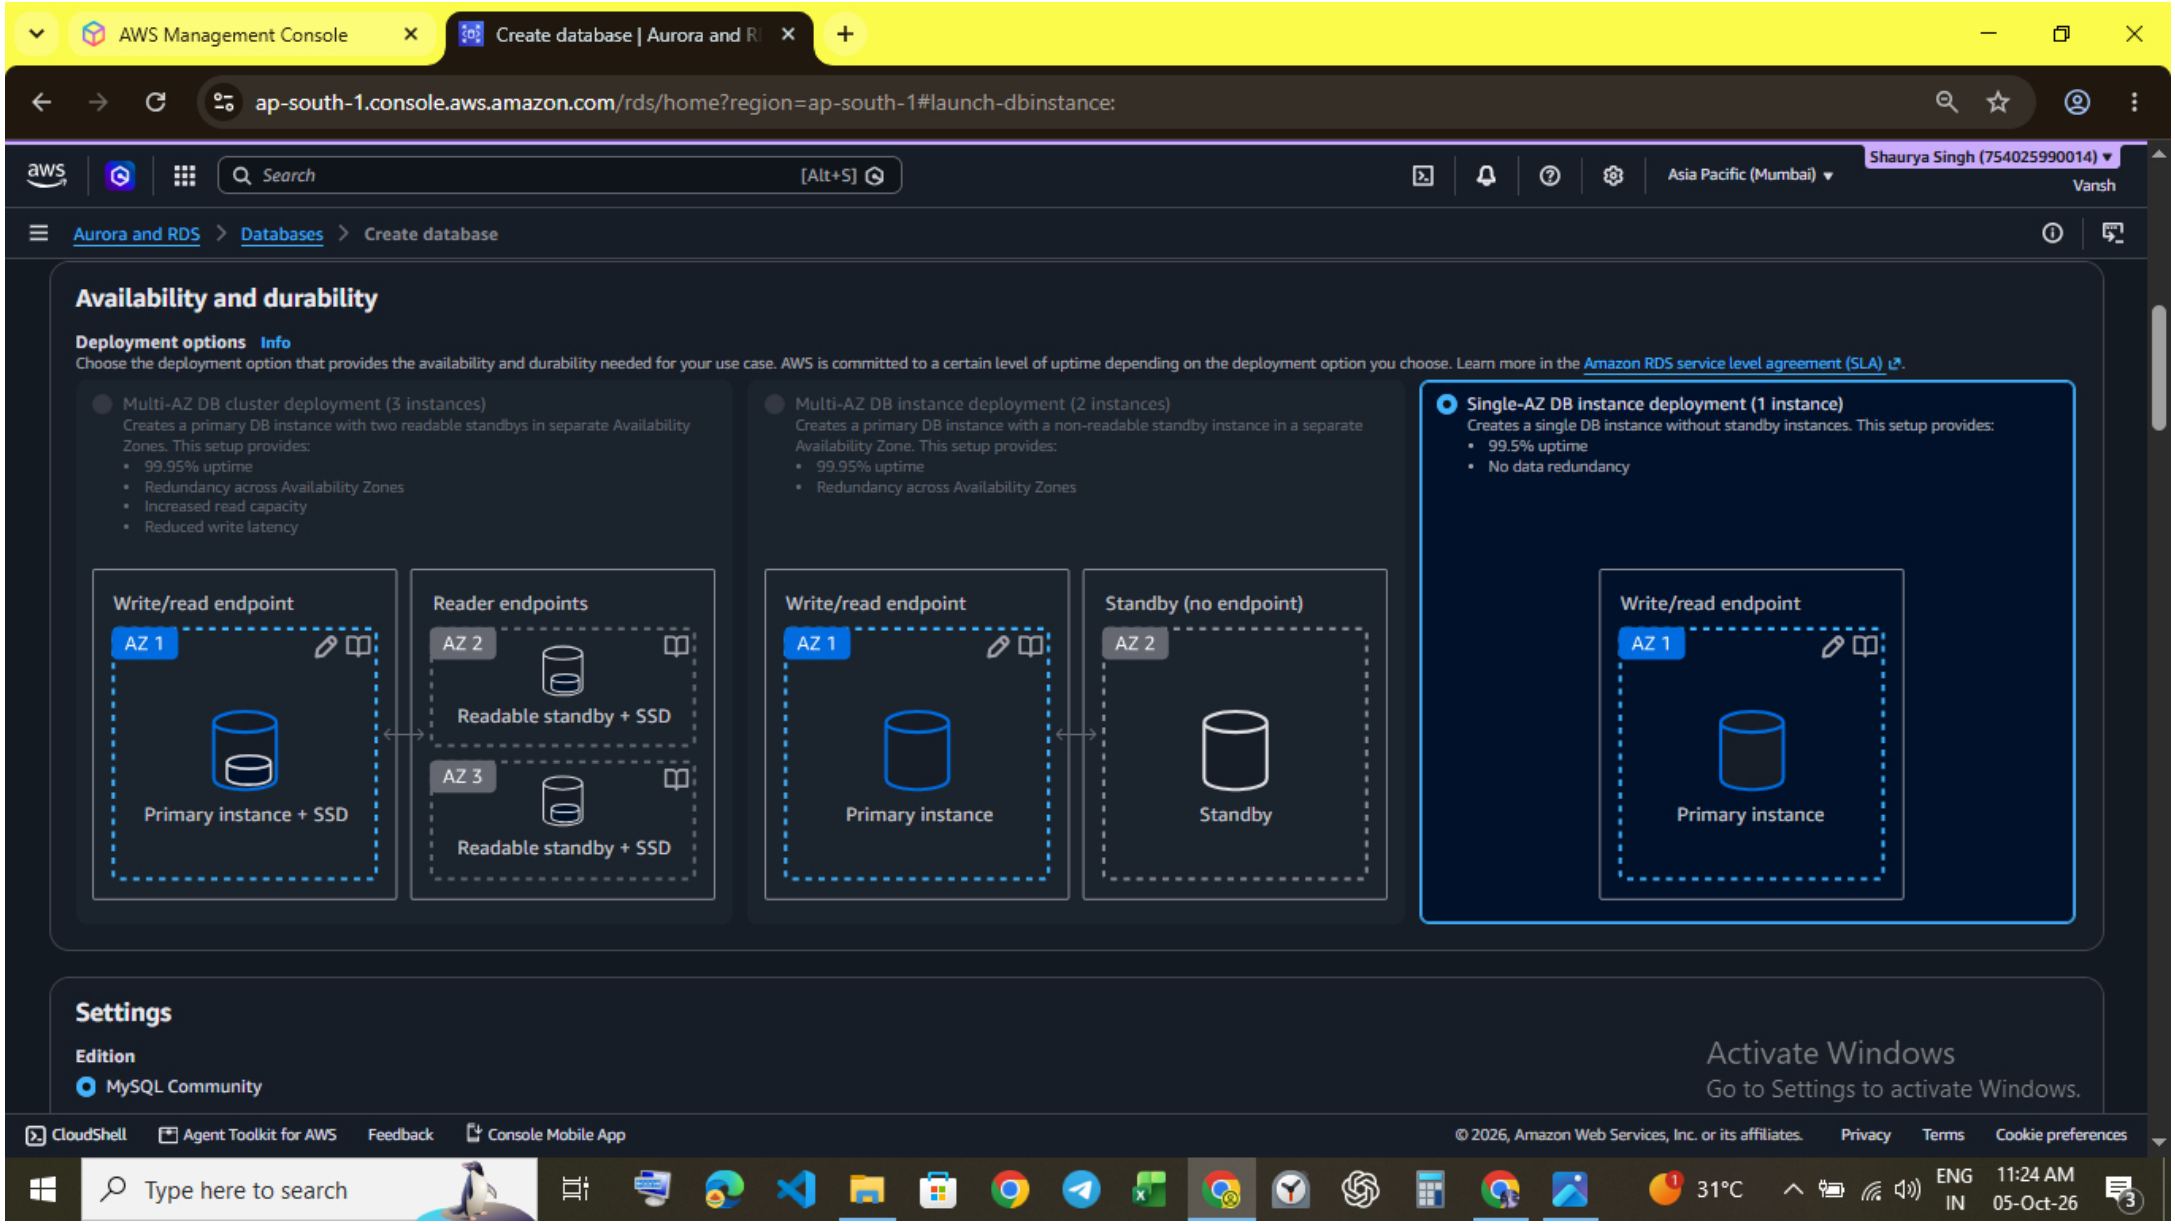
- Verify RDS is not publicly accessible, encryption and backups are enabled, and the intended DB subnet group and RDS-SG are attached.
- Use Session Manager to access the backend and test only the application endpoint that is actually running; a connection-refused result means no process is listening at that address/port at test time.

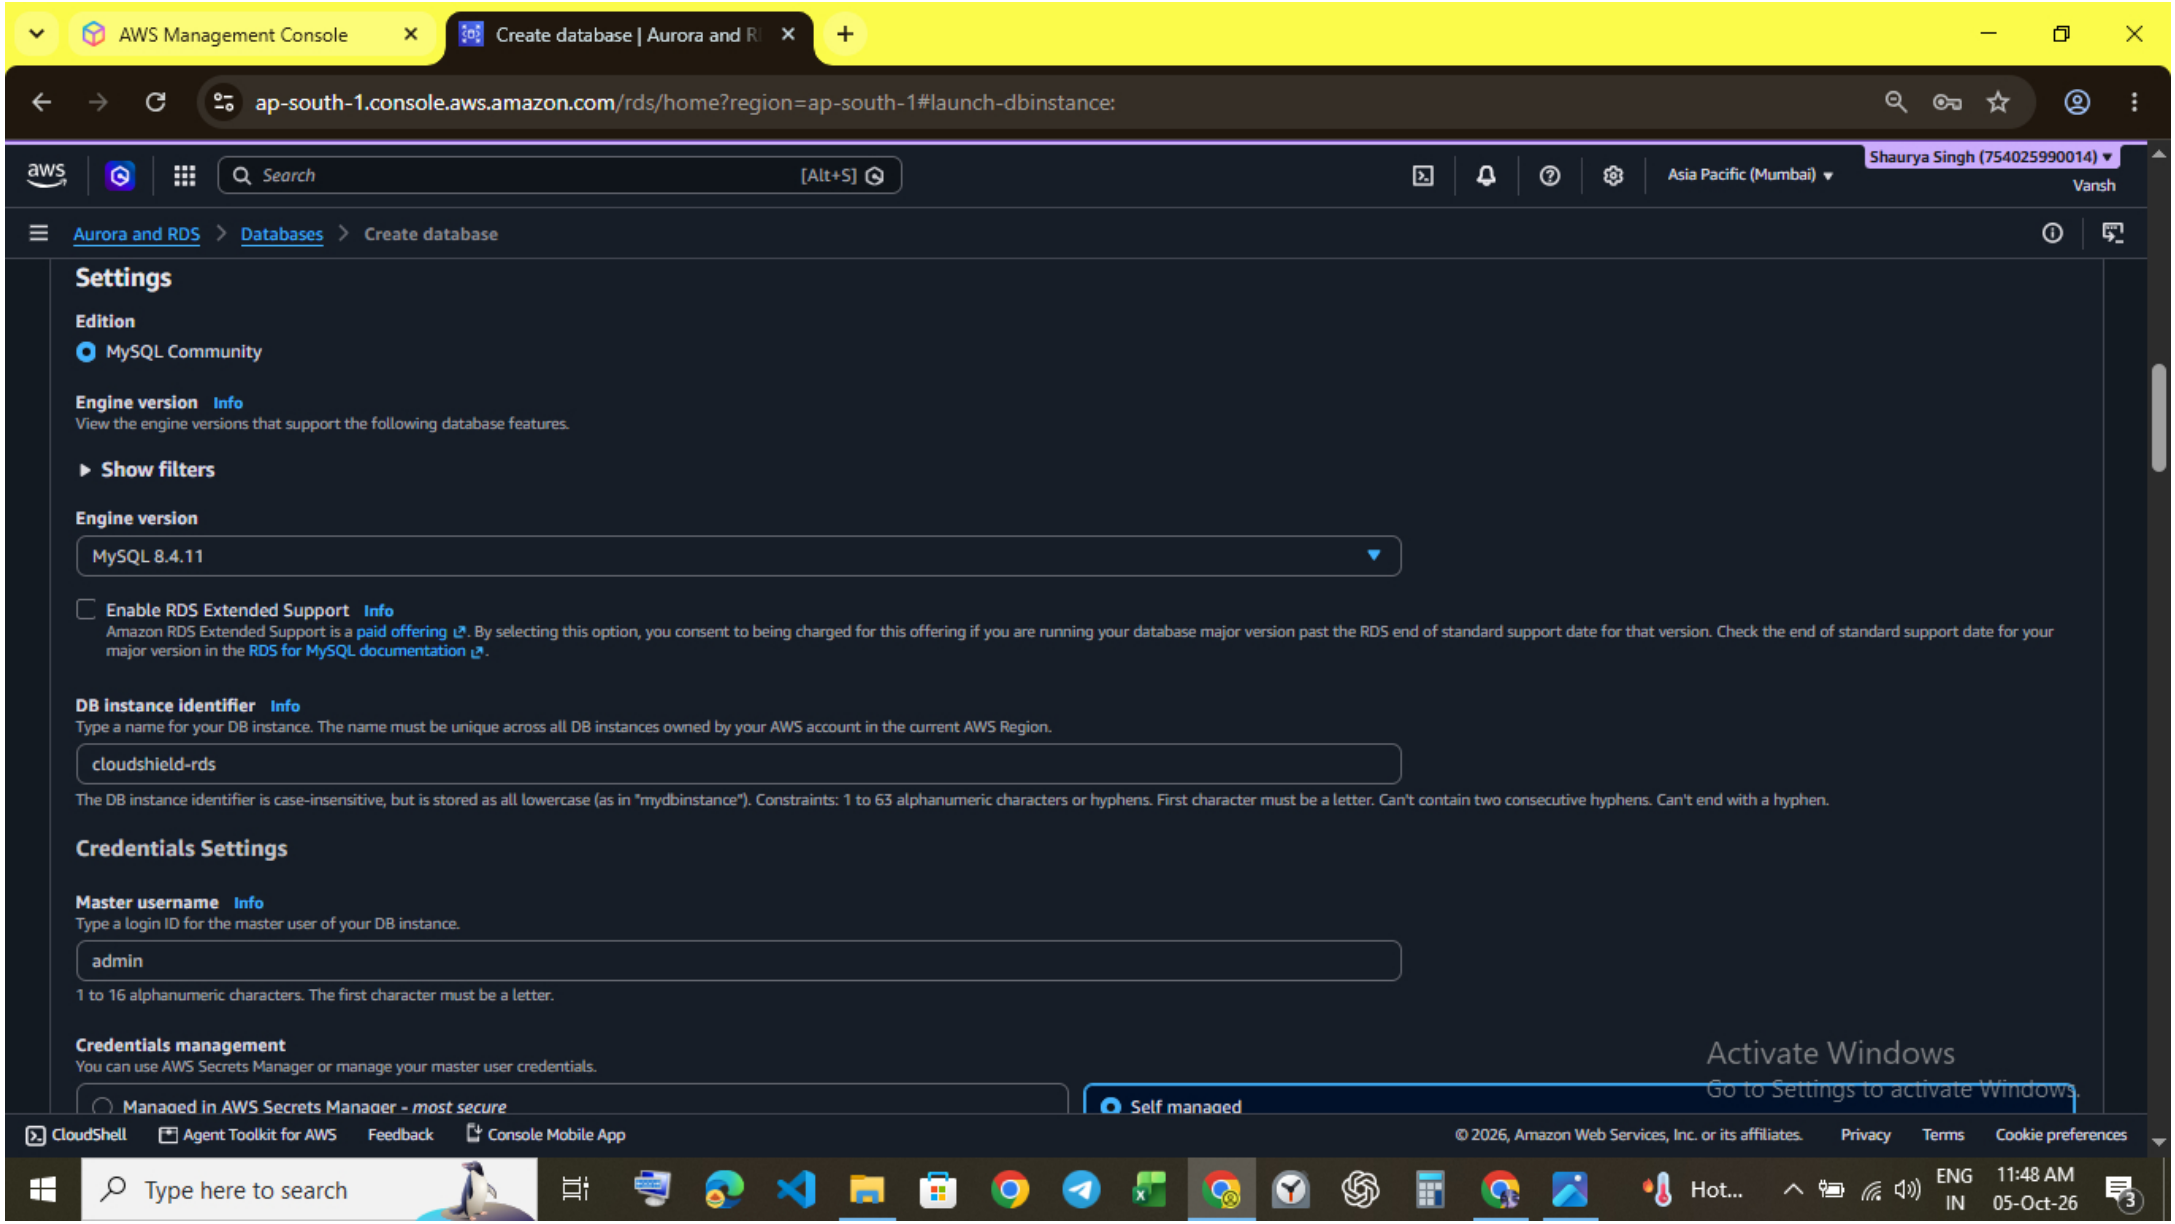
The screenshots following this phase remain the original database and backend evidence. The architecture labels MySQL 8.4; use the actual RDS console details for the deployed engine version.

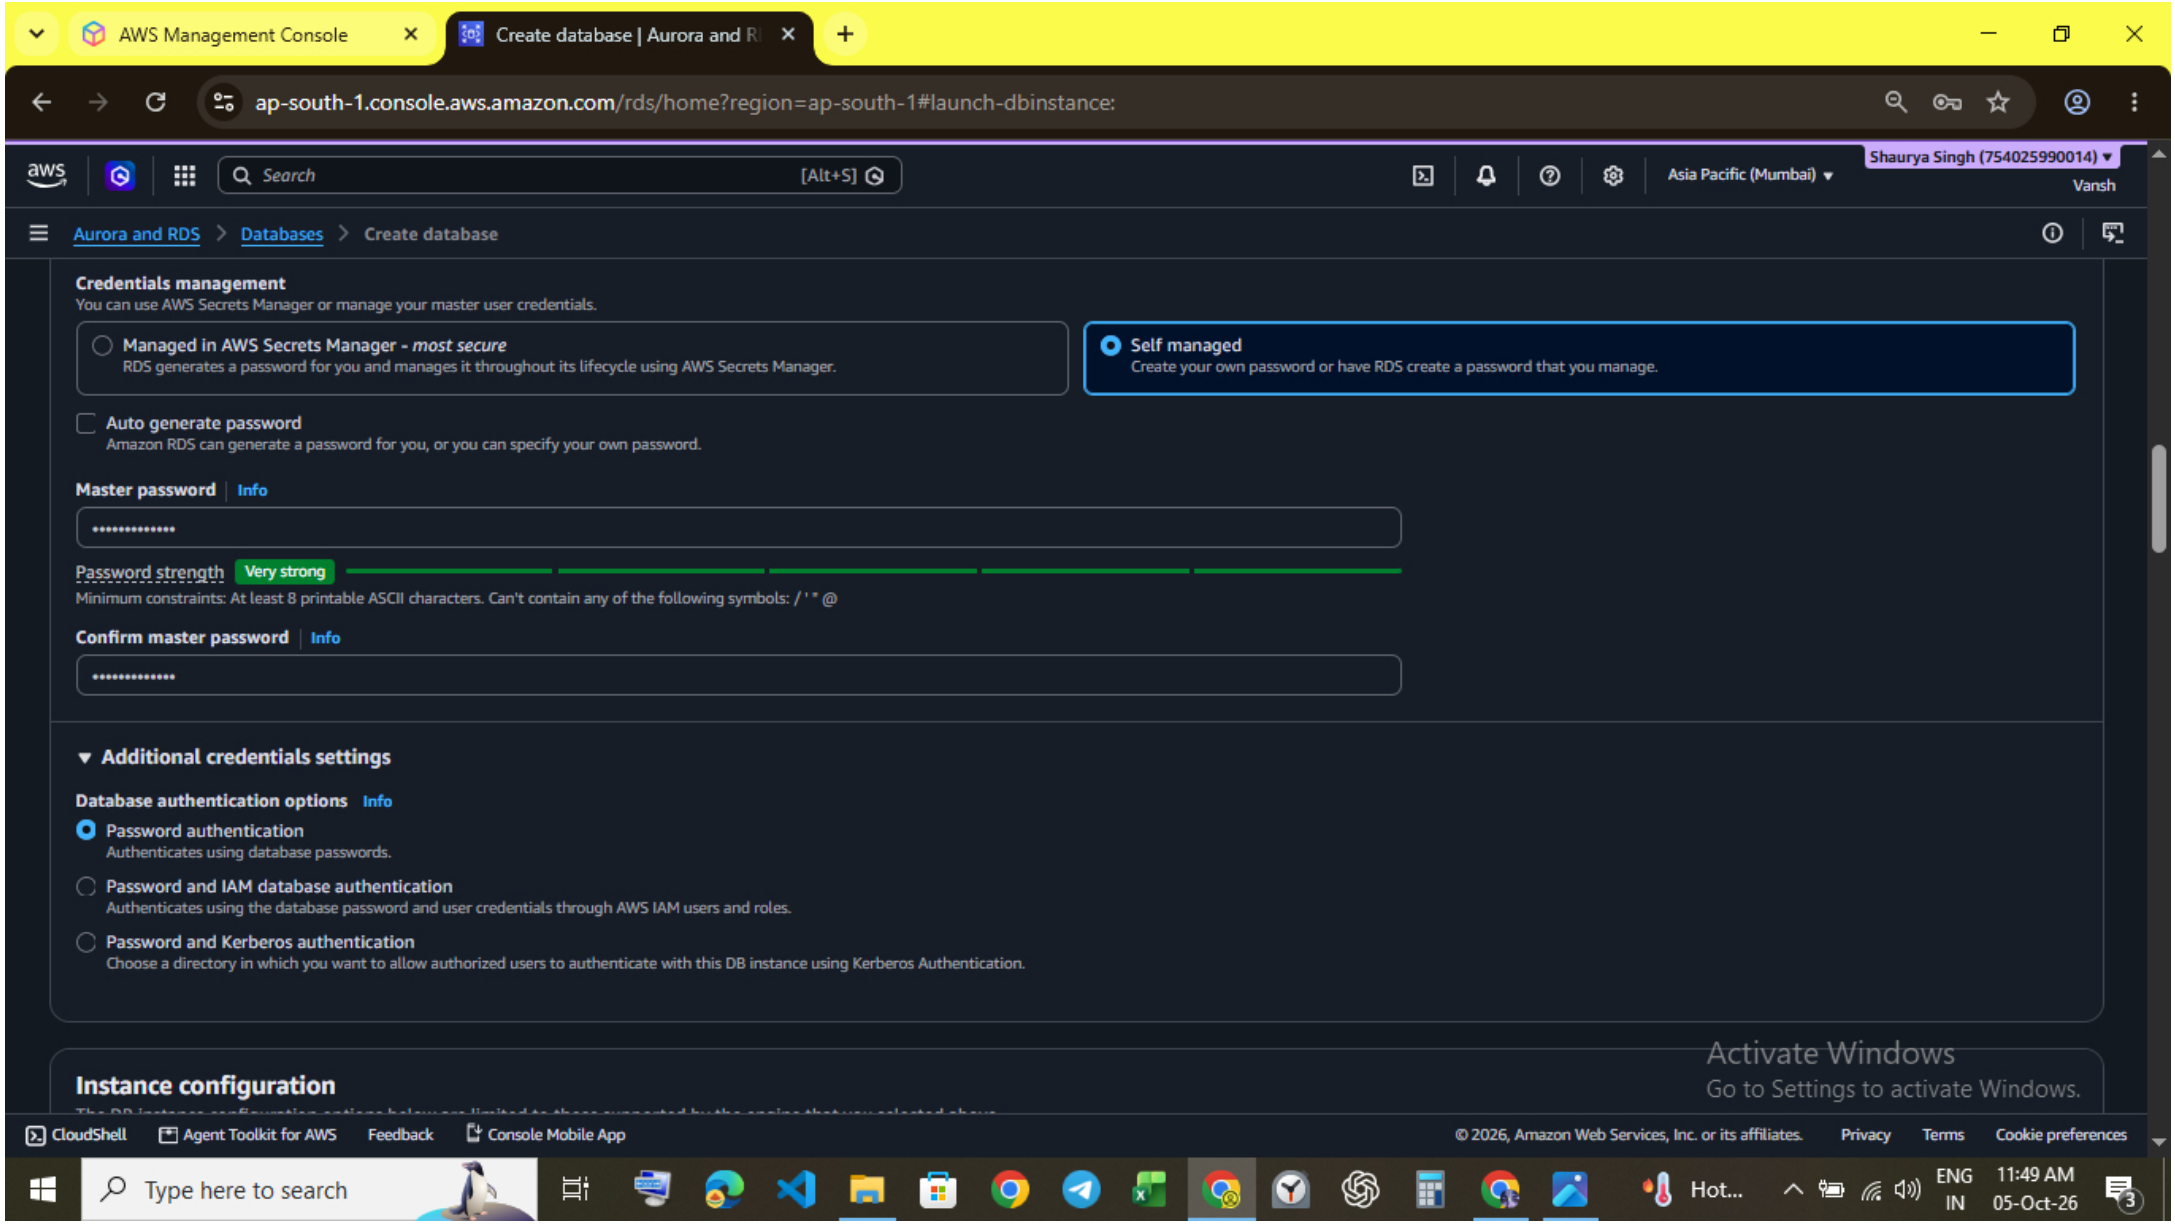

AWS Management Console
Aurora and RDS | ap-south-1
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#create-db-subnet-group:
Search
[Alt+S]
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
Aurora and RDS
Subnet groups
Create DB subnet group
Add subnets
Availability Zones
Choose the Availability Zones that include the subnets you want to add.
Choose an availability zone
ap-south-1a
ap-south-1b
Subnets
Choose the subnets that you want to add. The list includes the subnets in the selected Availability Zones.
Select subnets
private-1
Subnet ID: subnet-0b68ced35717b3ab8 CIDR: 10.0.2.0/24
private-2
Subnet ID: subnet-024e8b0c29447d207 CIDR: 10.0.3.0/24
For Multi-AZ DB clusters, you must select 3 subnets in 3 different Availability Zones.
Subnets selected (2)
Availability zone
Subnet name
Subnet ID
CIDR block
ap-south-1a
private-1
subnet-0b68ced35717b3ab8
10.0.2.0/24
ap-south-1b
private-2
subnet-024e8b0c29447d207
10.0.3.0/24
Cancel
Create
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
Hot...
ENG
IN
11:19 AM
05-Oct-26

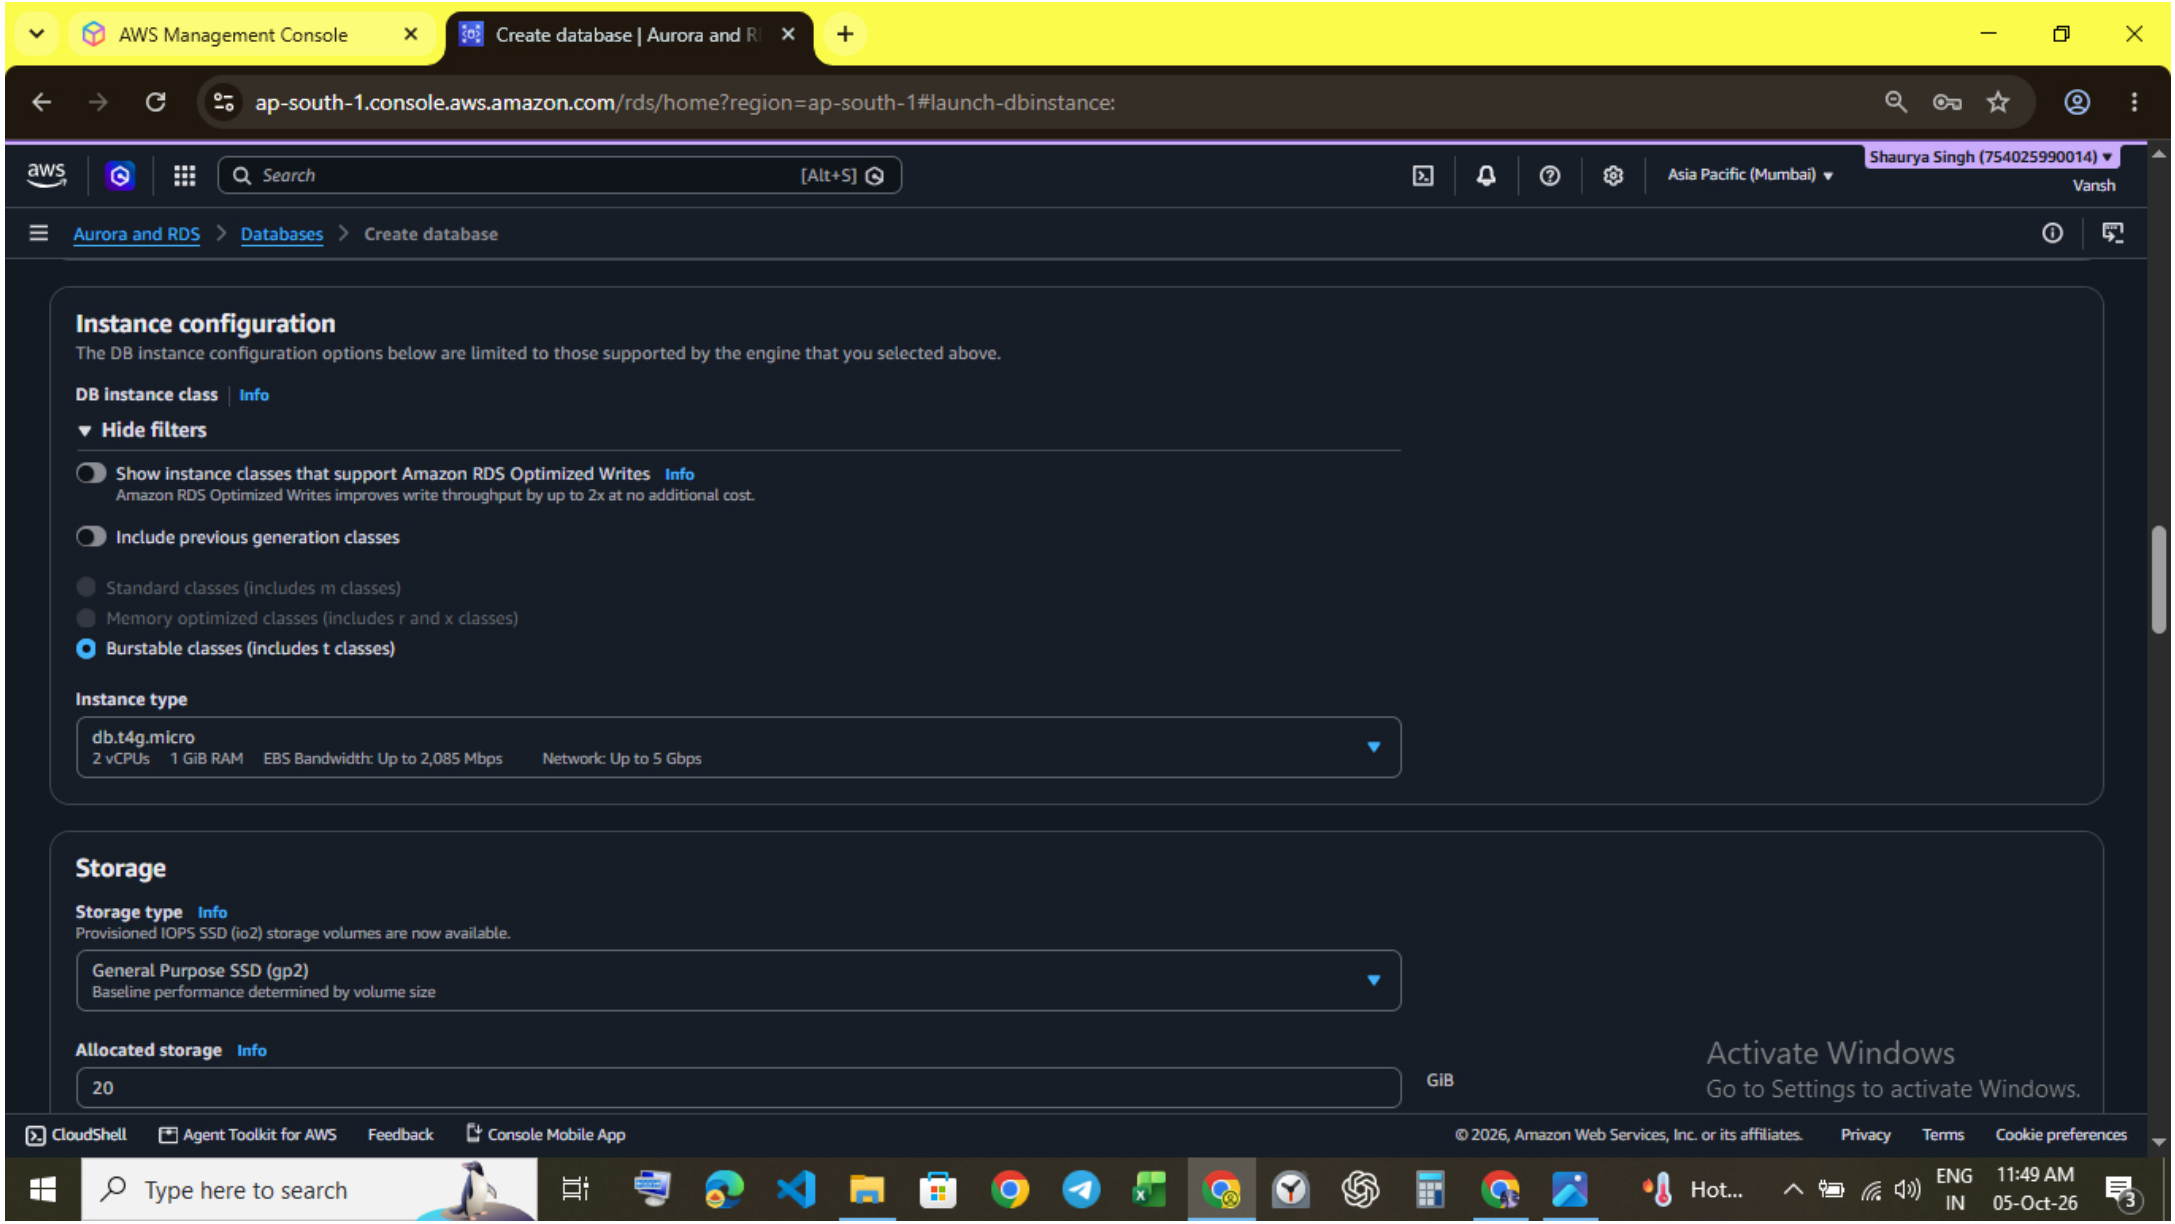

AWS Management Console
Subnet Groups | Aurora and RD
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#db-subnet-groups-list:
Search
[Alt+S]
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
Aurora and RDS
Subnet groups
Aurora and RDS
Dashboard
Databases
CloudWatch Database Insights
Snapshots
Exports in Amazon S3
Automated backups
Reserved instances
Proxies
Subnet groups
Parameter groups
Option groups
Custom engine versions
Zero-ETL integrations
Events
Event subscriptions
Recommendations 0
Certificate update
Subnet groups (1)
Edit
Delete
Create DB subnet group
Filter by subnet group
1
Name
Description
Status
VPC
cloudshield-db-subnet-group
Private subnet group for CloudShield RDS
Complete
vpc-00d60f9c997388d02
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
Hot...
ENG
IN
11:19 AM
05-Oct-26

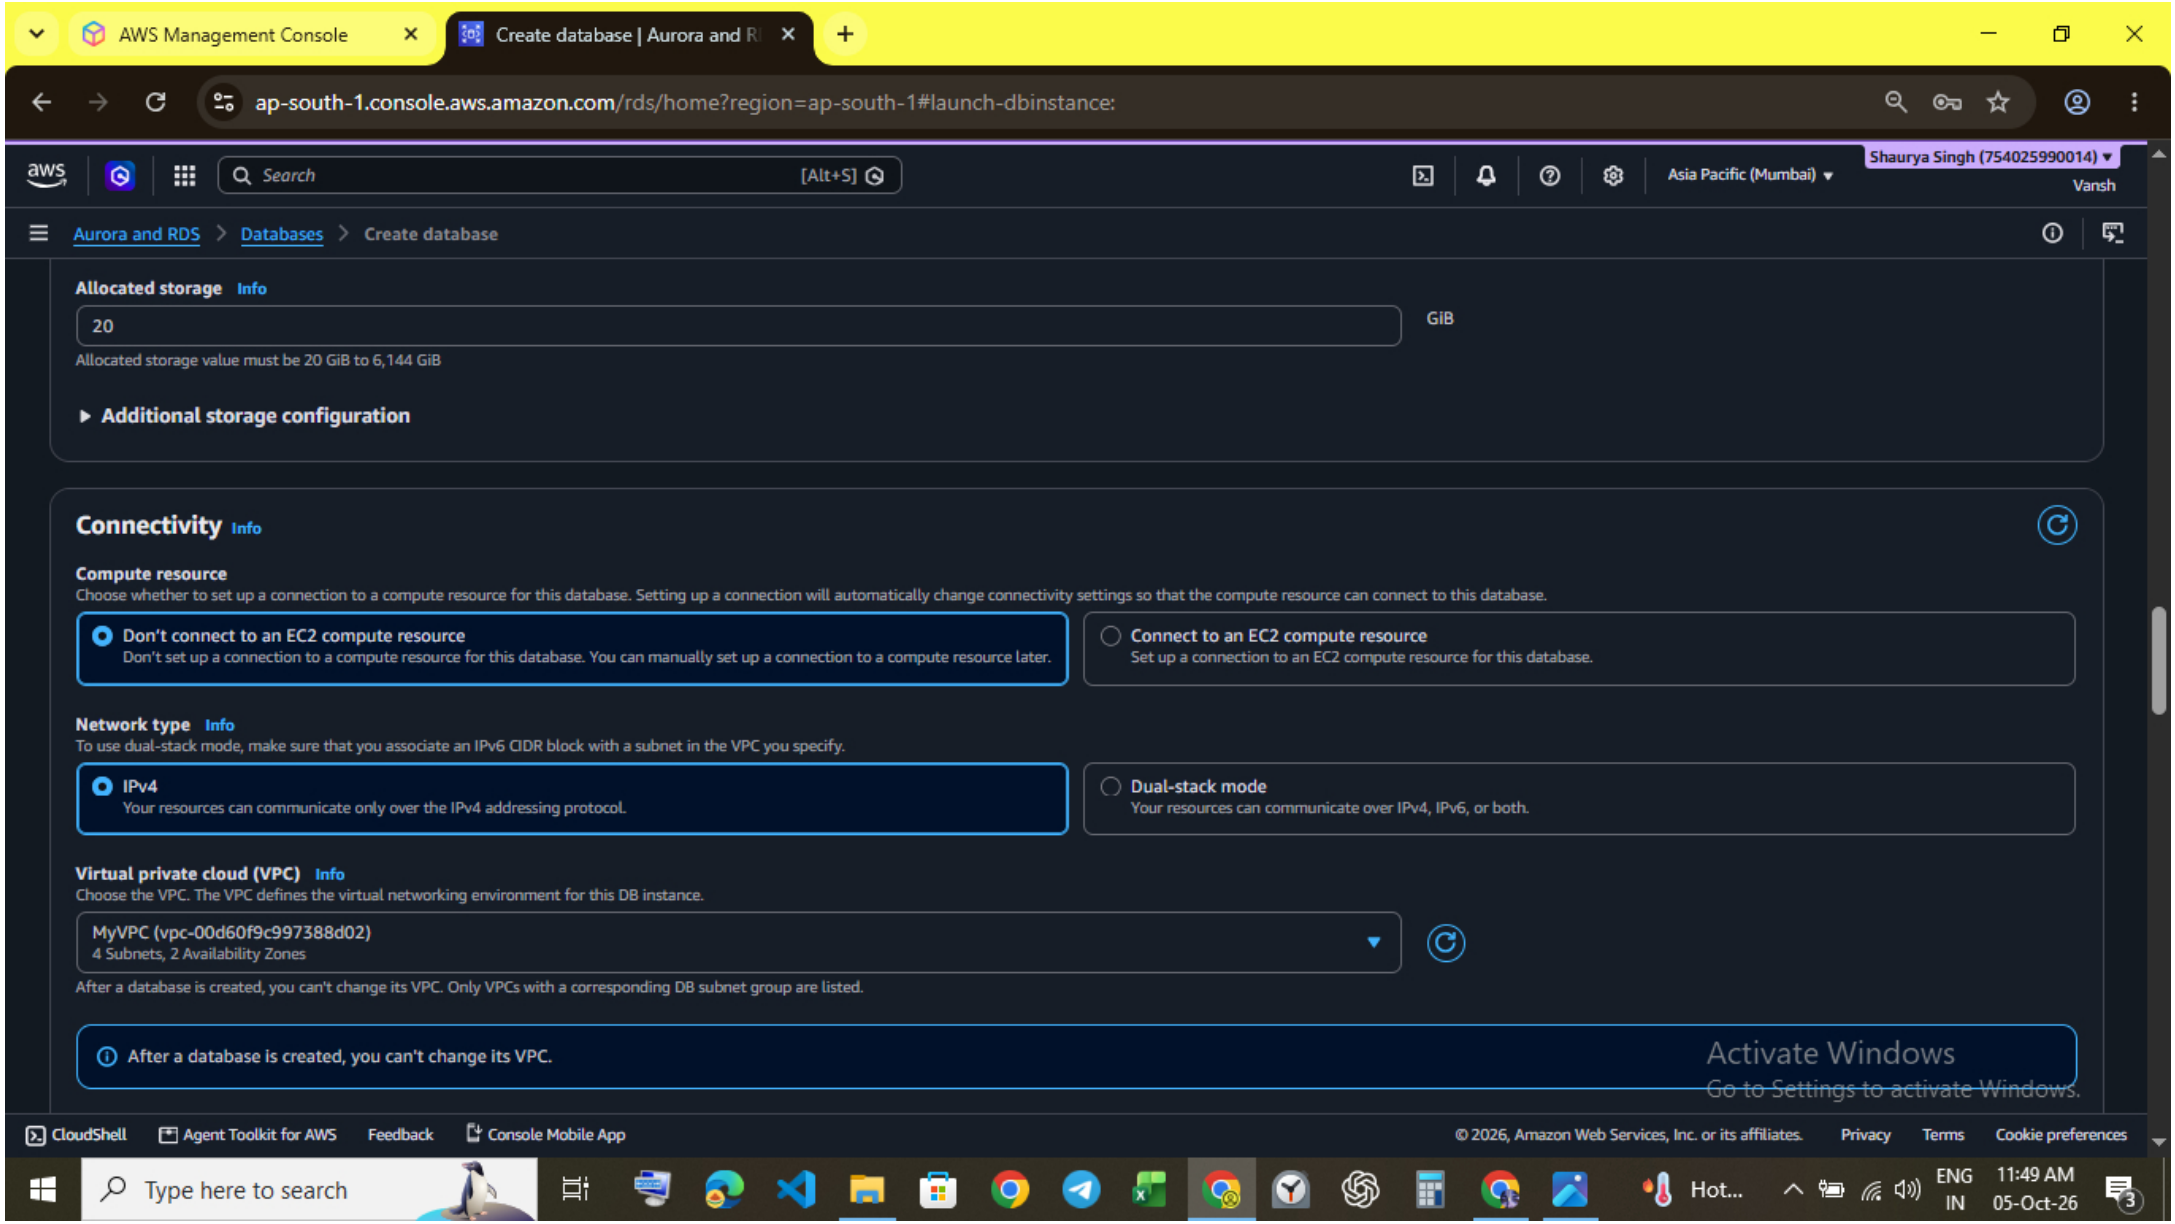

AWS Management Console
Create database | Aurora and R
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#launch-dbinstance:
Search
[Alt+S]
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
Aurora and RDS
Databases
Create database
Create database Info
Free plan has access to limited features and resources
The free plan limits the features and resources that are available for RDS and Aurora databases. Upgrade your account plan to remove all limitations. Learn more
Upgrade plan
Engine options
Engine type Info
Aurora (MySQL Compatible)
Aurora (PostgreSQL Compatible)
MySQL
PostgreSQL
MariaDB
Oracle
Microsoft SQL Server
IBM Db2
Choose a database creation method
Full configuration
You set all of the configuration options, including ones for availability, security, backups, and maintenance.
Easy create
Use recommended best-practice configurations. Some configuration options can be changed after the database is created.
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
31°C
ENG
IN
11:23 AM
05-Oct-26

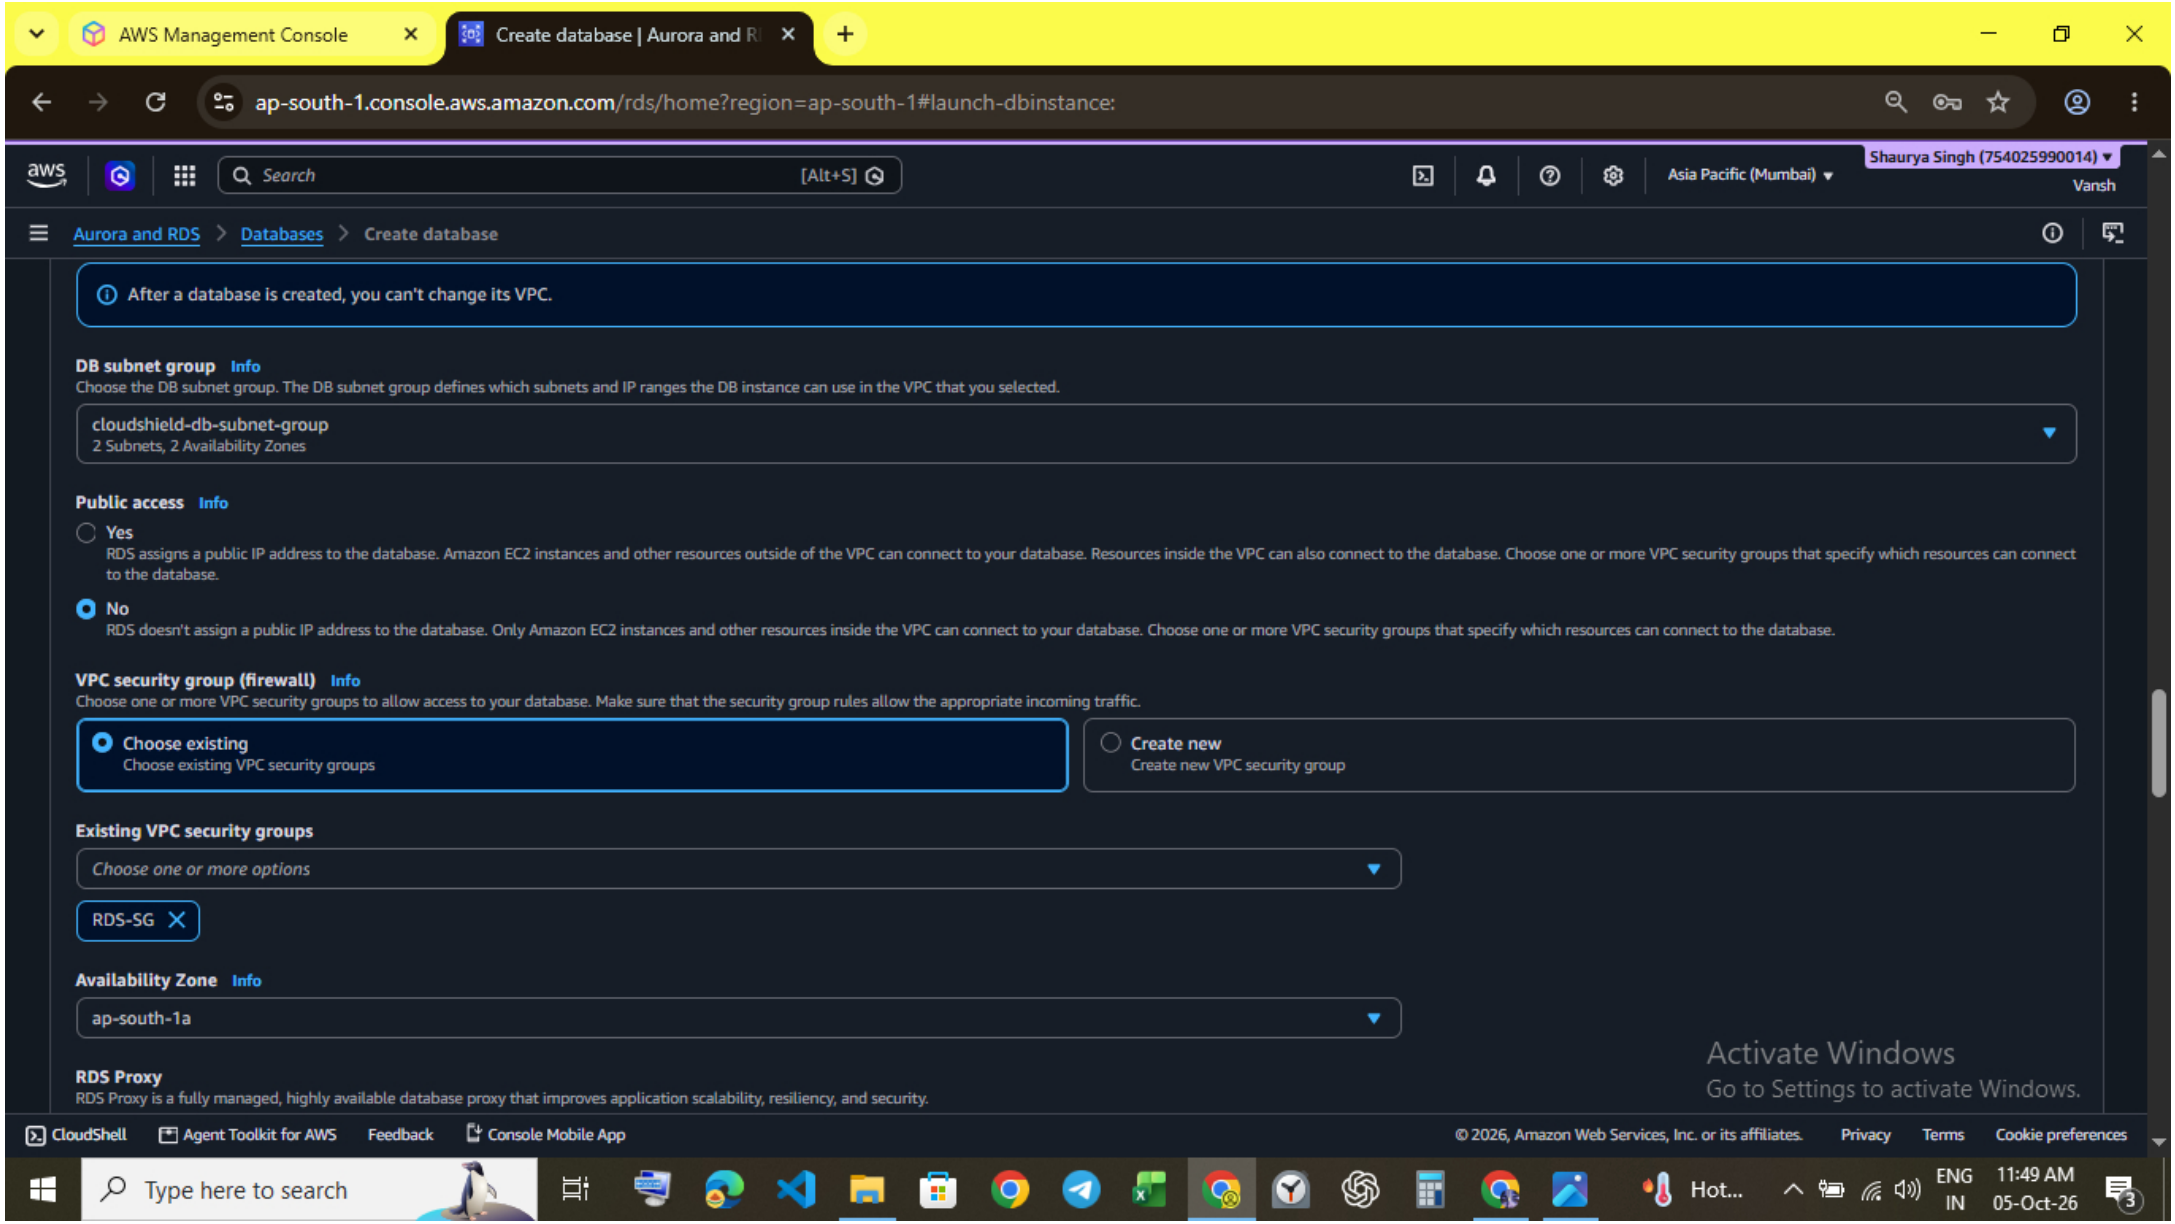

AWS Management Console
Create database | Aurora and R
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#launch-dbinstance:
Search
[Alt+S]
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
Aurora and RDS
Databases
Create database
Availability and durability
Deployment options Info
Choose the deployment option that provides the availability and durability needed for your use case. AWS is committed to a certain level of uptime depending on the deployment option you choose. Learn more in the Amazon RDS service level agreement (SLA).
Multi-AZ DB cluster deployment (3 instances)
Creates a primary DB instance with two readable standbys in separate Availability Zones. This setup provides:
99.95% uptime
Redundancy across Availability Zones
Increased read capacity
Reduced write latency
Write/read endpoint
AZ 1
Primary instance + SSD
Reader endpoints
AZ 2
Readable standby + SSD
AZ 3
Readable standby + SSD
Multi-AZ DB instance deployment (2 instances)
Creates a primary DB instance with a non-readable standby instance in a separate Availability Zone. This setup provides:
99.95% uptime
Redundancy across Availability Zones
Write/read endpoint
AZ 1
Primary instance
Standby (no endpoint)
AZ 2
Standby
Single-AZ DB instance deployment (1 instance)
Creates a single DB instance without standby instances. This setup provides:
99.5% uptime
No data redundancy
Write/read endpoint
AZ 1
Primary instance
Settings
Edition
MySQL Community
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
31°C
ENG
IN
11:24 AM
05-Oct-26

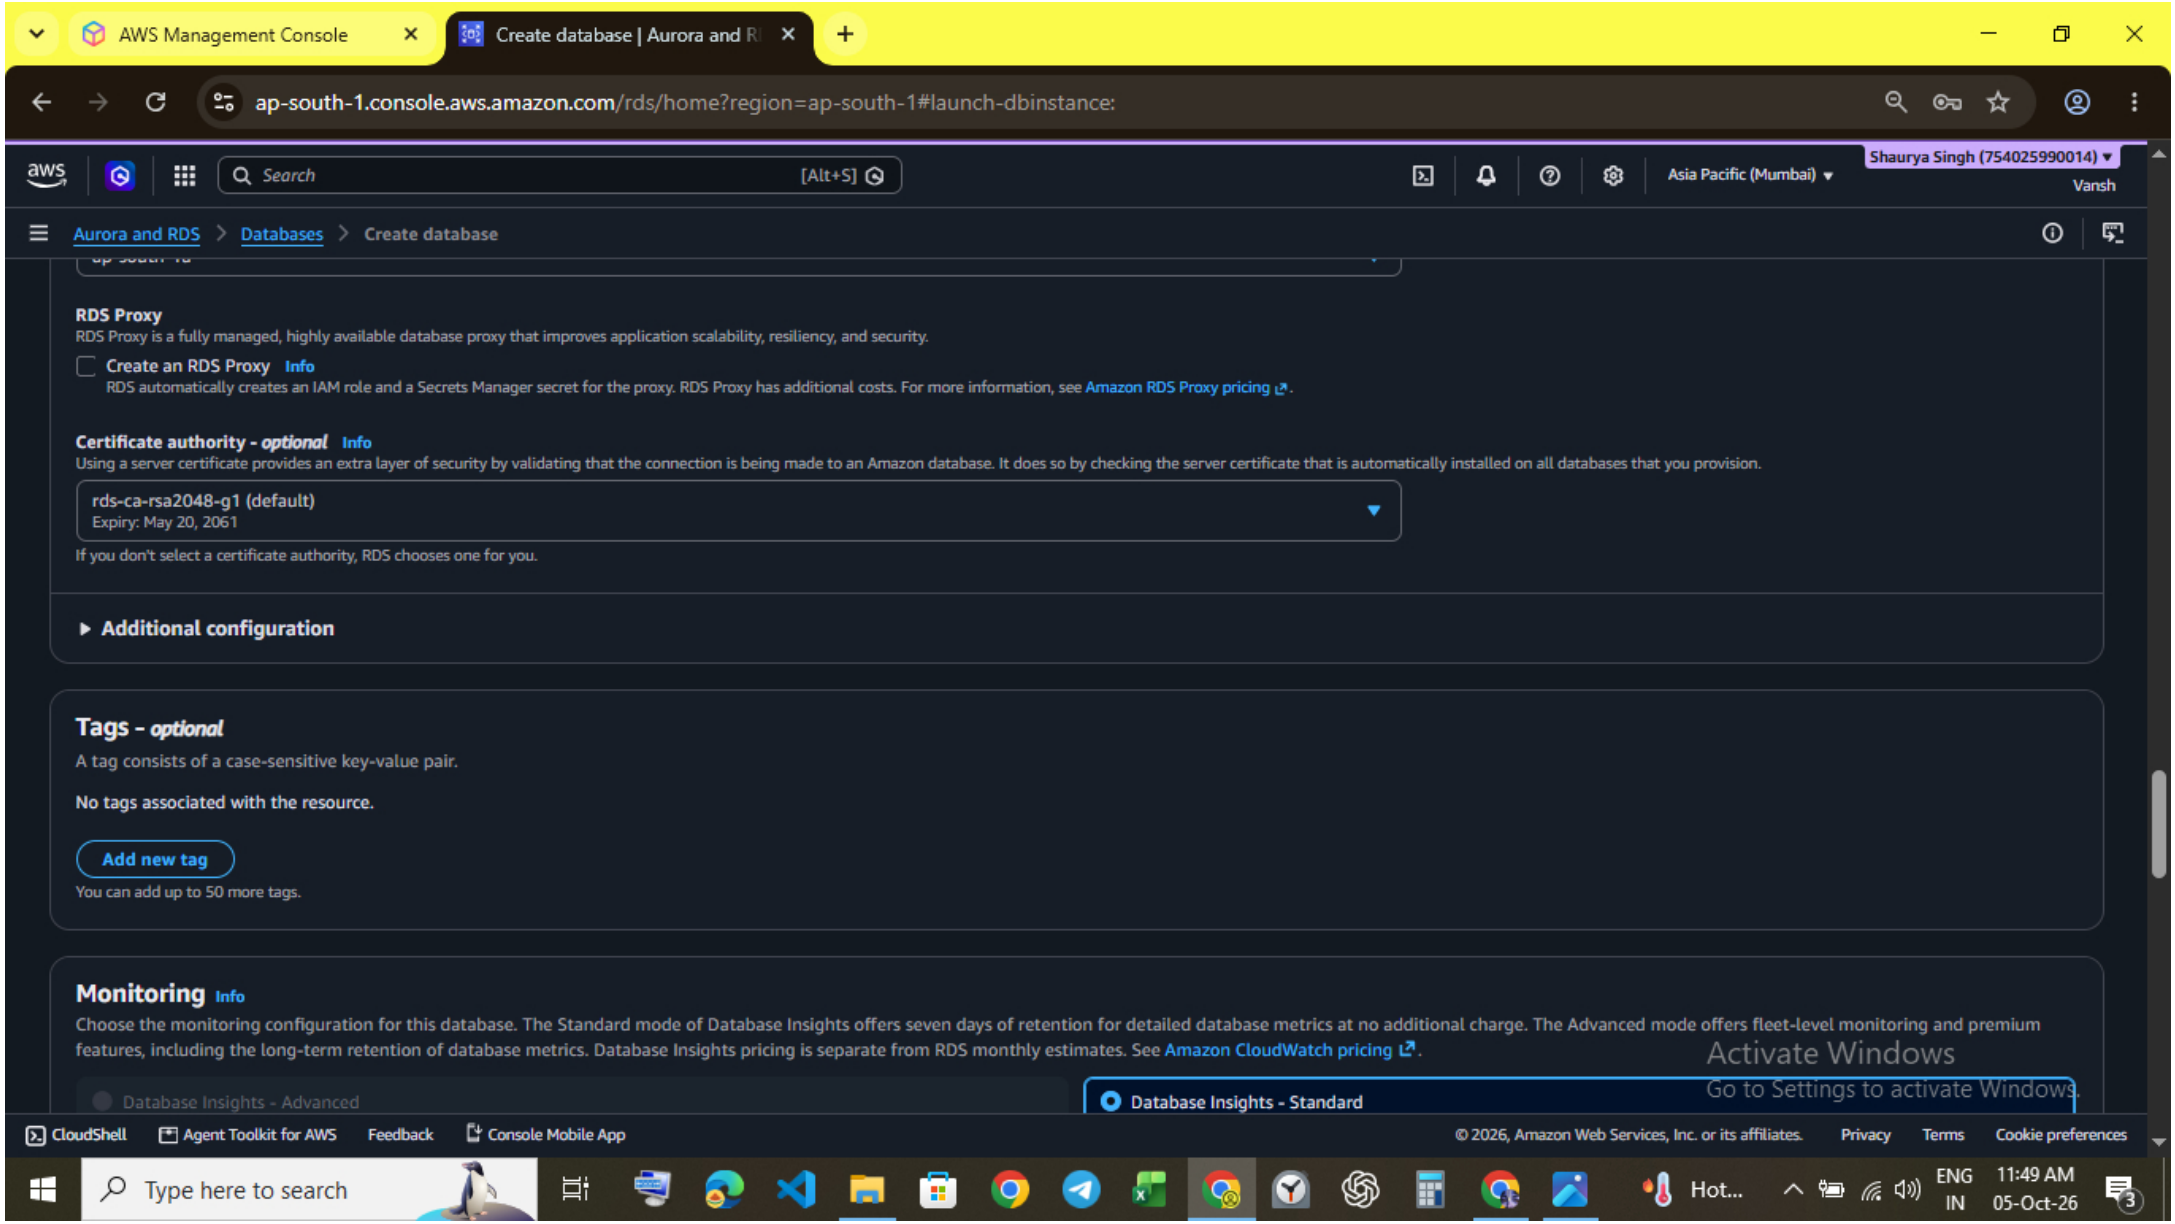

AWS Management Console
Create database | Aurora and R
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#launch-dbinstance:
Search
[Alt+S]
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
Aurora and RDS
Databases
Create database
Settings
Edition
MySQL Community
Engine version Info
View the engine versions that support the following database features.
Show filters
Engine version
MySQL 8.4.11
Enable RDS Extended Support Info
Amazon RDS Extended Support is a paid offering. By selecting this option, you consent to being charged for this offering if you are running your database major version past the RDS end of standard support date for that version. Check the end of standard support date for your major version in the RDS for MySQL documentation.
DB instance identifier Info
Type a name for your DB instance. The name must be unique across all DB instances owned by your AWS account in the current AWS Region.
cloudshield-rds
The DB instance identifier is case-insensitive, but is stored as all lowercase (as in "mydbinstance"). Constraints: 1 to 63 alphanumeric characters or hyphens. First character must be a letter. Can't contain two consecutive hyphens. Can't end with a hyphen.
Credentials Settings
Master username Info
Type a login ID for the master user of your DB instance.
admin
1 to 16 alphanumeric characters. The first character must be a letter.
Credentials management
You can use AWS Secrets Manager or manage your master user credentials.
Managed in AWS Secrets Manager - most secure
Self managed
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
Hot...
ENG
IN
11:48 AM
05-Oct-26

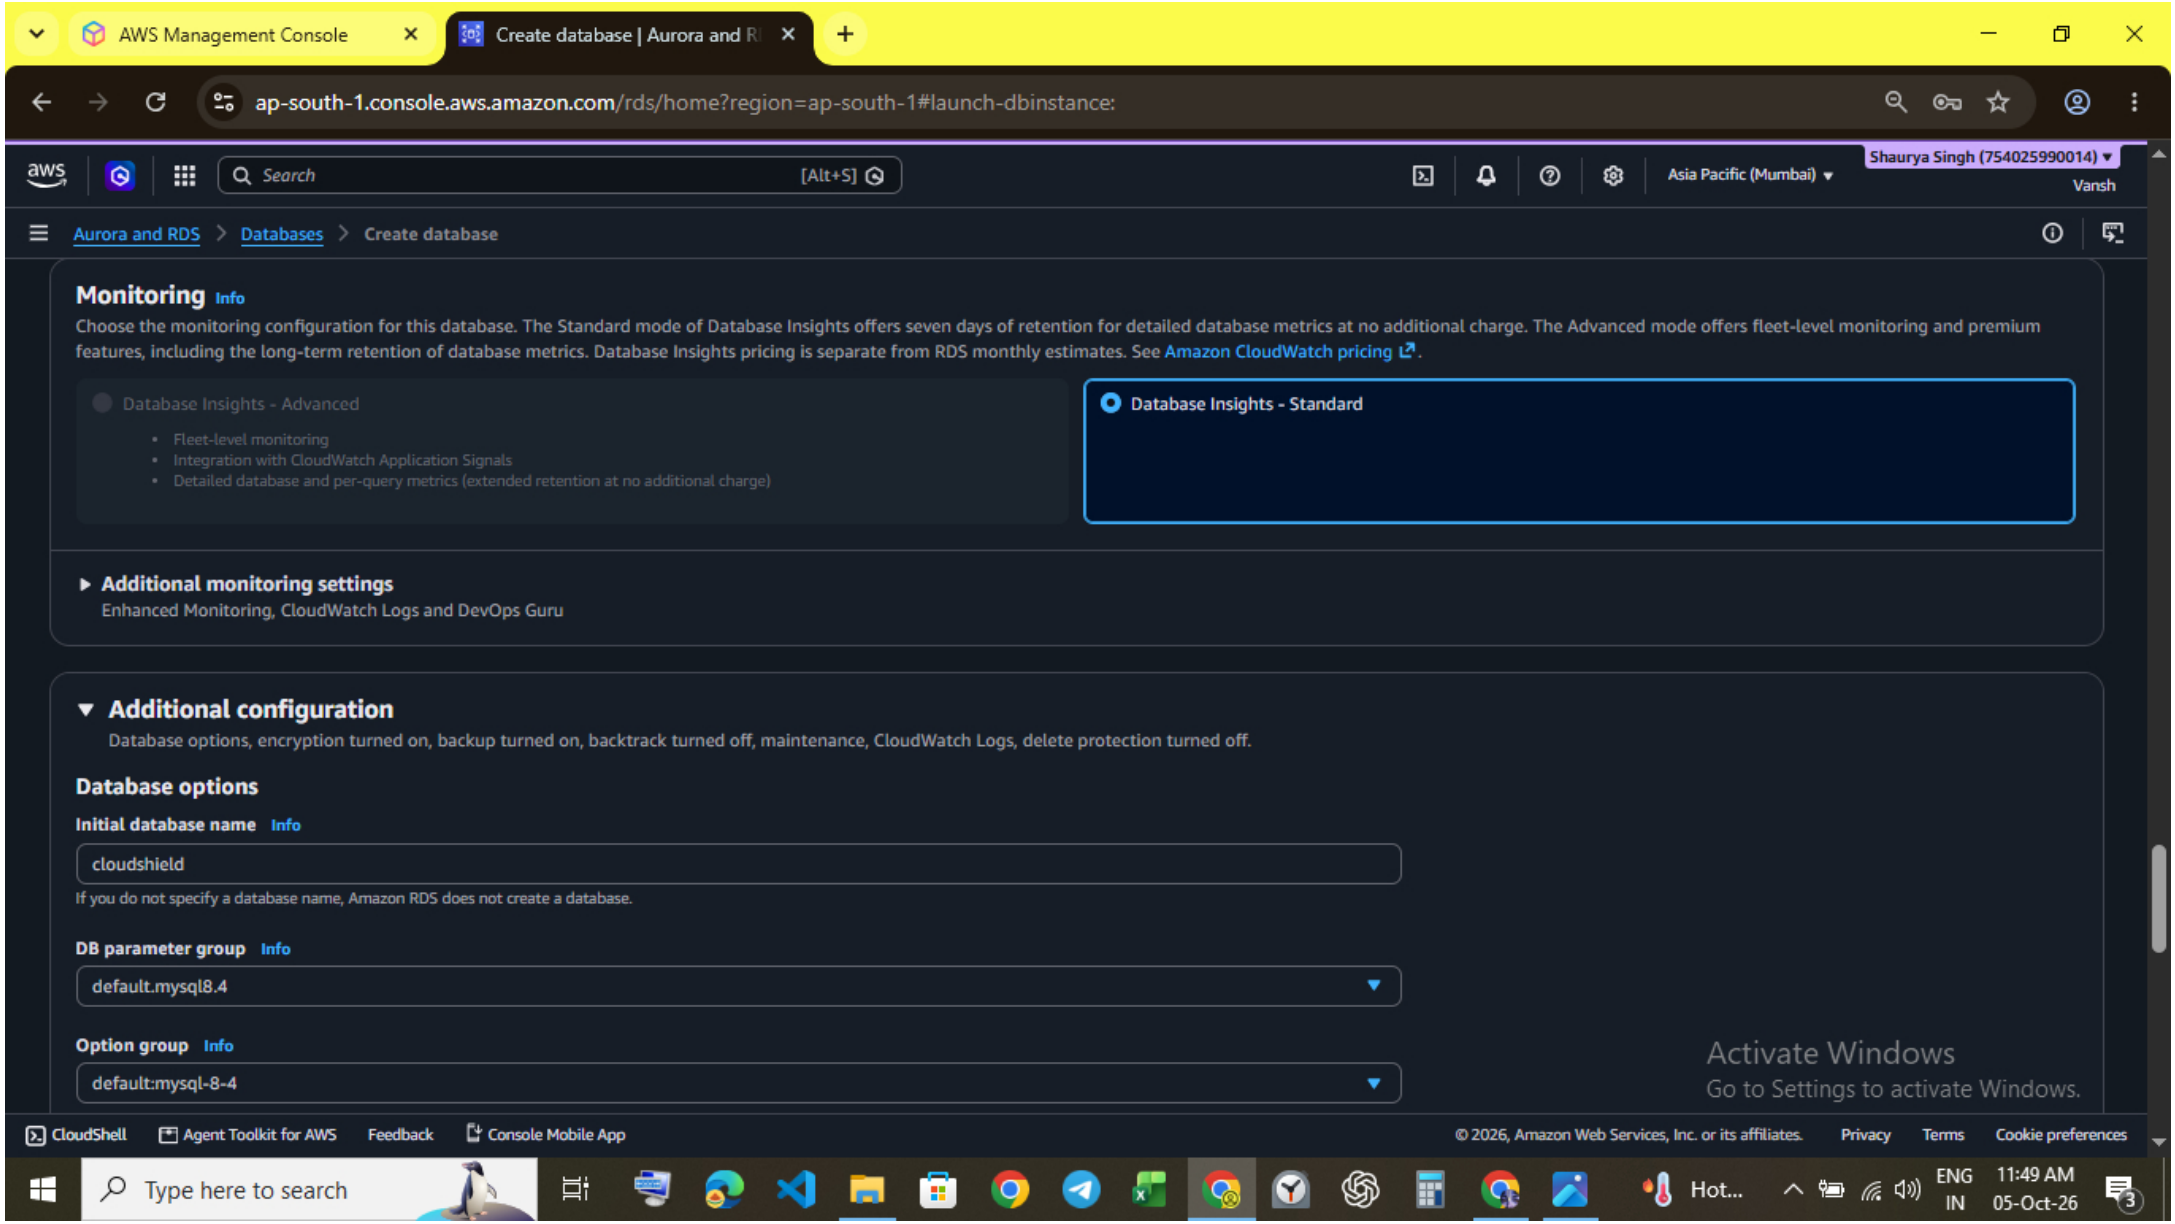

AWS Management Console
Create database | Aurora and R
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#launch-dbinstance:
Search
[Alt+S]
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
Aurora and RDS
Databases
Create database
Credentials management
You can use AWS Secrets Manager or manage your master user credentials.
Managed in AWS Secrets Manager - most secure
RDS generates a password for you and manages it throughout its lifecycle using AWS Secrets Manager.
Self managed
Create your own password or have RDS create a password that you manage.
Auto generate password
Amazon RDS can generate a password for you, or you can specify your own password.
Master password
Info
Password strength
Very strong
Minimum constraints: At least 8 printable ASCII characters. Can't contain any of the following symbols: / ' " @
Confirm master password
Info
Additional credentials settings
Database authentication options
Info
Password authentication
Authenticates using database passwords.
Password and IAM database authentication
Authenticates using the database password and user credentials through AWS IAM users and roles.
Password and Kerberos authentication
Choose a directory in which you want to allow authorized users to authenticate with this DB instance using Kerberos Authentication.
Instance configuration
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
Hot...
ENG
IN
11:49 AM
05-Oct-26

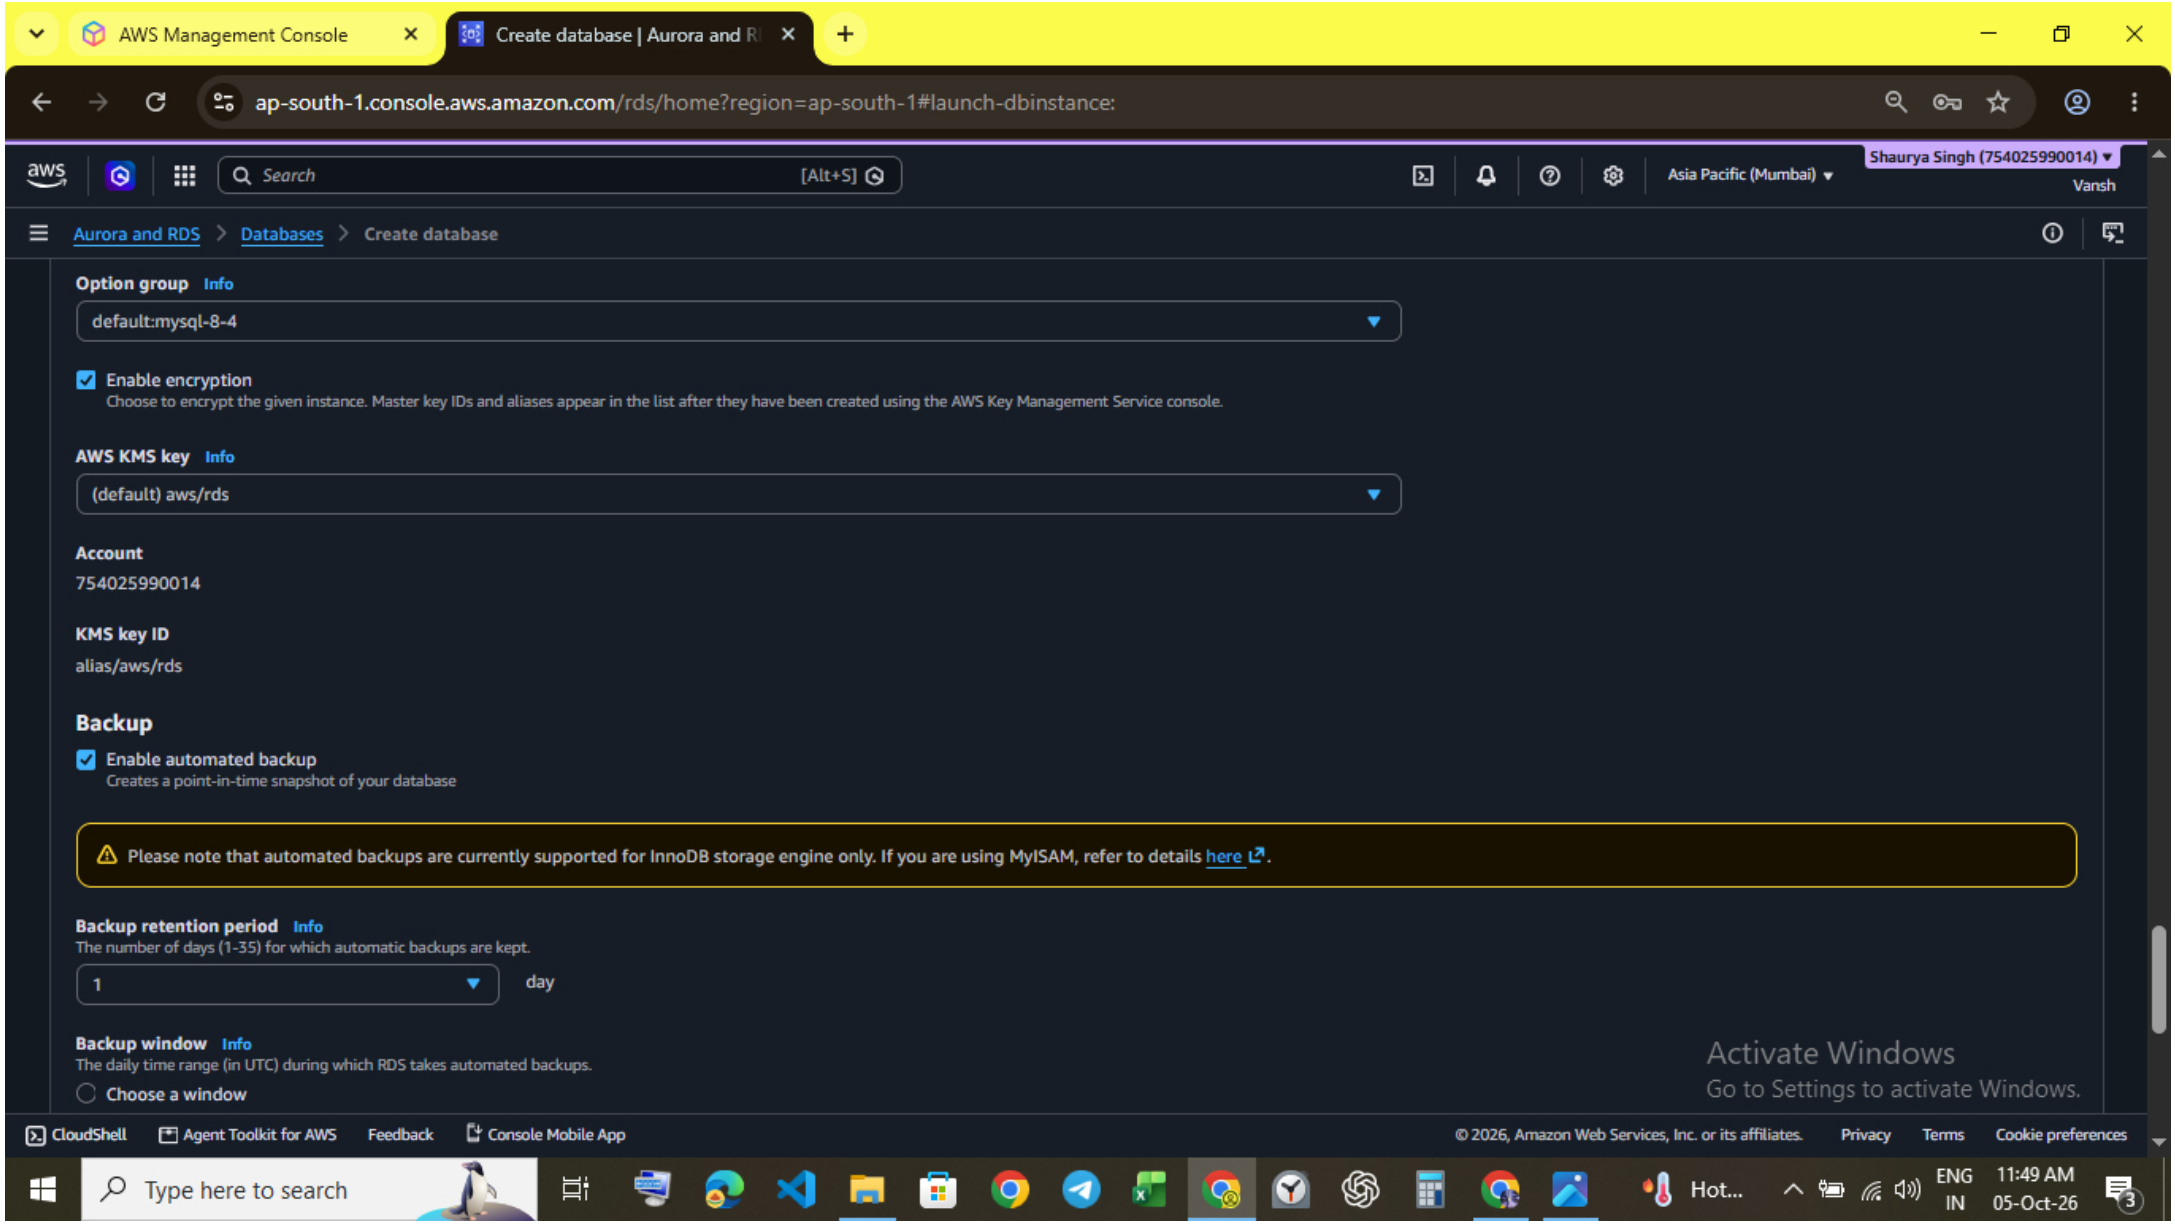

AWS Management Console
Create database | Aurora and R
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#launch-dbinstance:
Search
[Alt+S]
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
Aurora and RDS
Databases
Create database
Instance configuration
The DB instance configuration options below are limited to those supported by the engine that you selected above.
DB instance class
Info
Hide filters
Show instance classes that support Amazon RDS Optimized Writes
Info
Amazon RDS Optimized Writes improves write throughput by up to 2x at no additional cost.
Include previous generation classes
Standard classes (includes m classes)
Memory optimized classes (includes r and x classes)
Burstable classes (includes t classes)
Instance type
db.t4g.micro
2 vCPUs 1 GiB RAM EBS Bandwidth: Up to 2,085 Mbps Network: Up to 5 Gbps
Storage
Storage type
Info
Provisioned IOPS SSD (io2) storage volumes are now available.
General Purpose SSD (gp2)
Baseline performance determined by volume size
Allocated storage
Info
20
GiB
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
Hot...
ENG
IN
11:49 AM
05-Oct-26

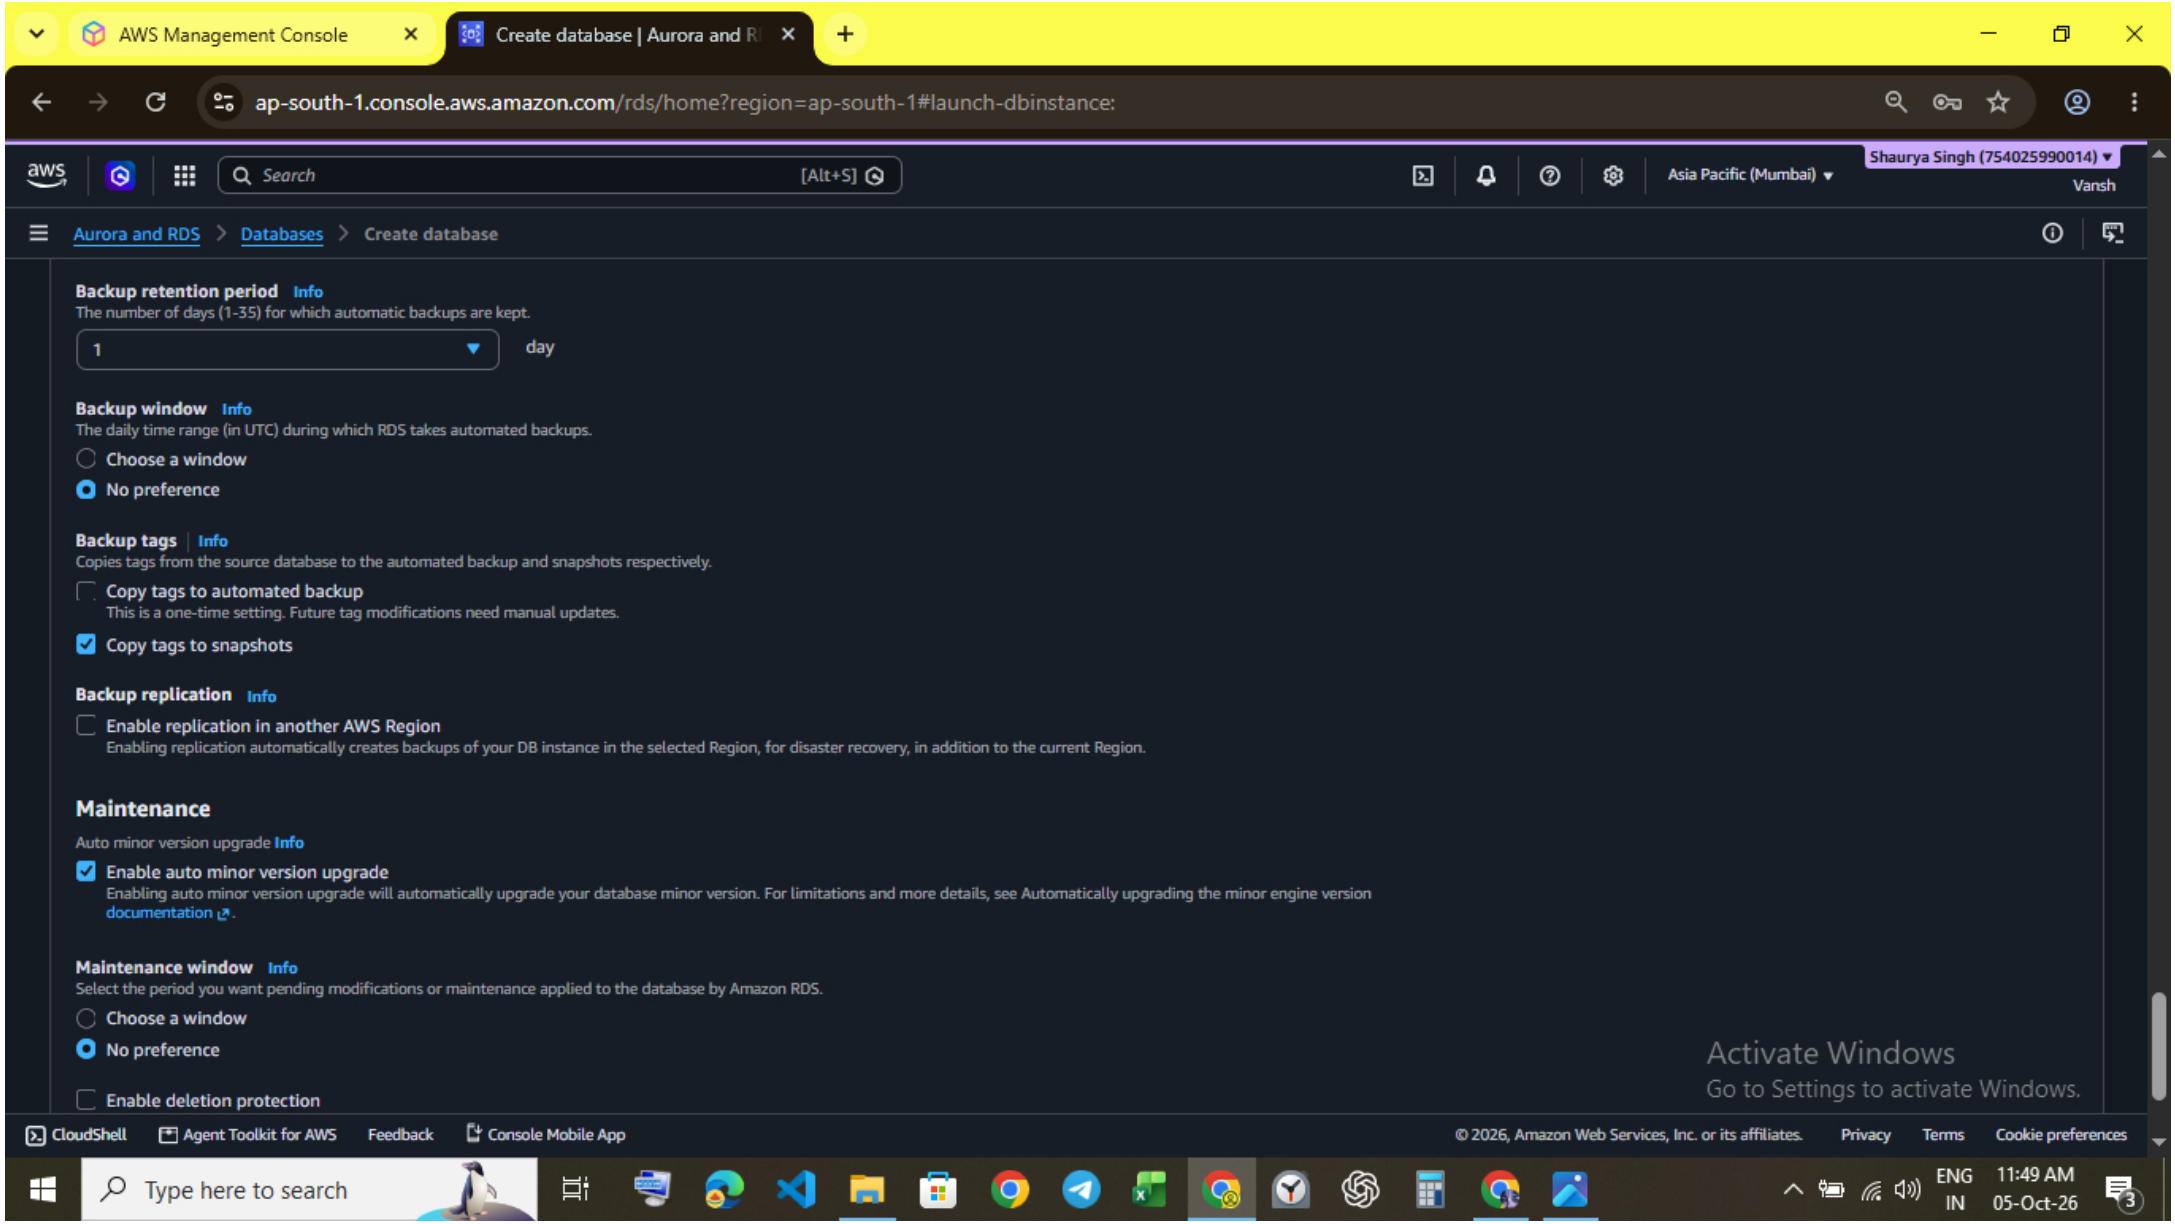

AWS Management Console
Create database | Aurora and R
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#launch-dbinstance:
Search
[Alt+S]
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
Aurora and RDS
Databases
Create database
Allocated storage Info
20
GiB
Allocated storage value must be 20 GiB to 6,144 GiB
Additional storage configuration
Connectivity Info
Compute resource
Choose whether to set up a connection to a compute resource for this database. Setting up a connection will automatically change connectivity settings so that the compute resource can connect to this database.
Don't connect to an EC2 compute resource
Don't set up a connection to a compute resource for this database. You can manually set up a connection to a compute resource later.
Connect to an EC2 compute resource
Set up a connection to an EC2 compute resource for this database.
Network type Info
To use dual-stack mode, make sure that you associate an IPv6 CIDR block with a subnet in the VPC you specify.
IPv4
Your resources can communicate only over the IPv4 addressing protocol.
Dual-stack mode
Your resources can communicate over IPv4, IPv6, or both.
Virtual private cloud (VPC) Info
Choose the VPC. The VPC defines the virtual networking environment for this DB instance.
MyVPC (vpc-00d60f9c997388d02)
4 Subnets, 2 Availability Zones
After a database is created, you can't change its VPC. Only VPCs with a corresponding DB subnet group are listed.
After a database is created, you can't change its VPC.
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
Hot...
ENG
IN
11:49 AM
05-Oct-26

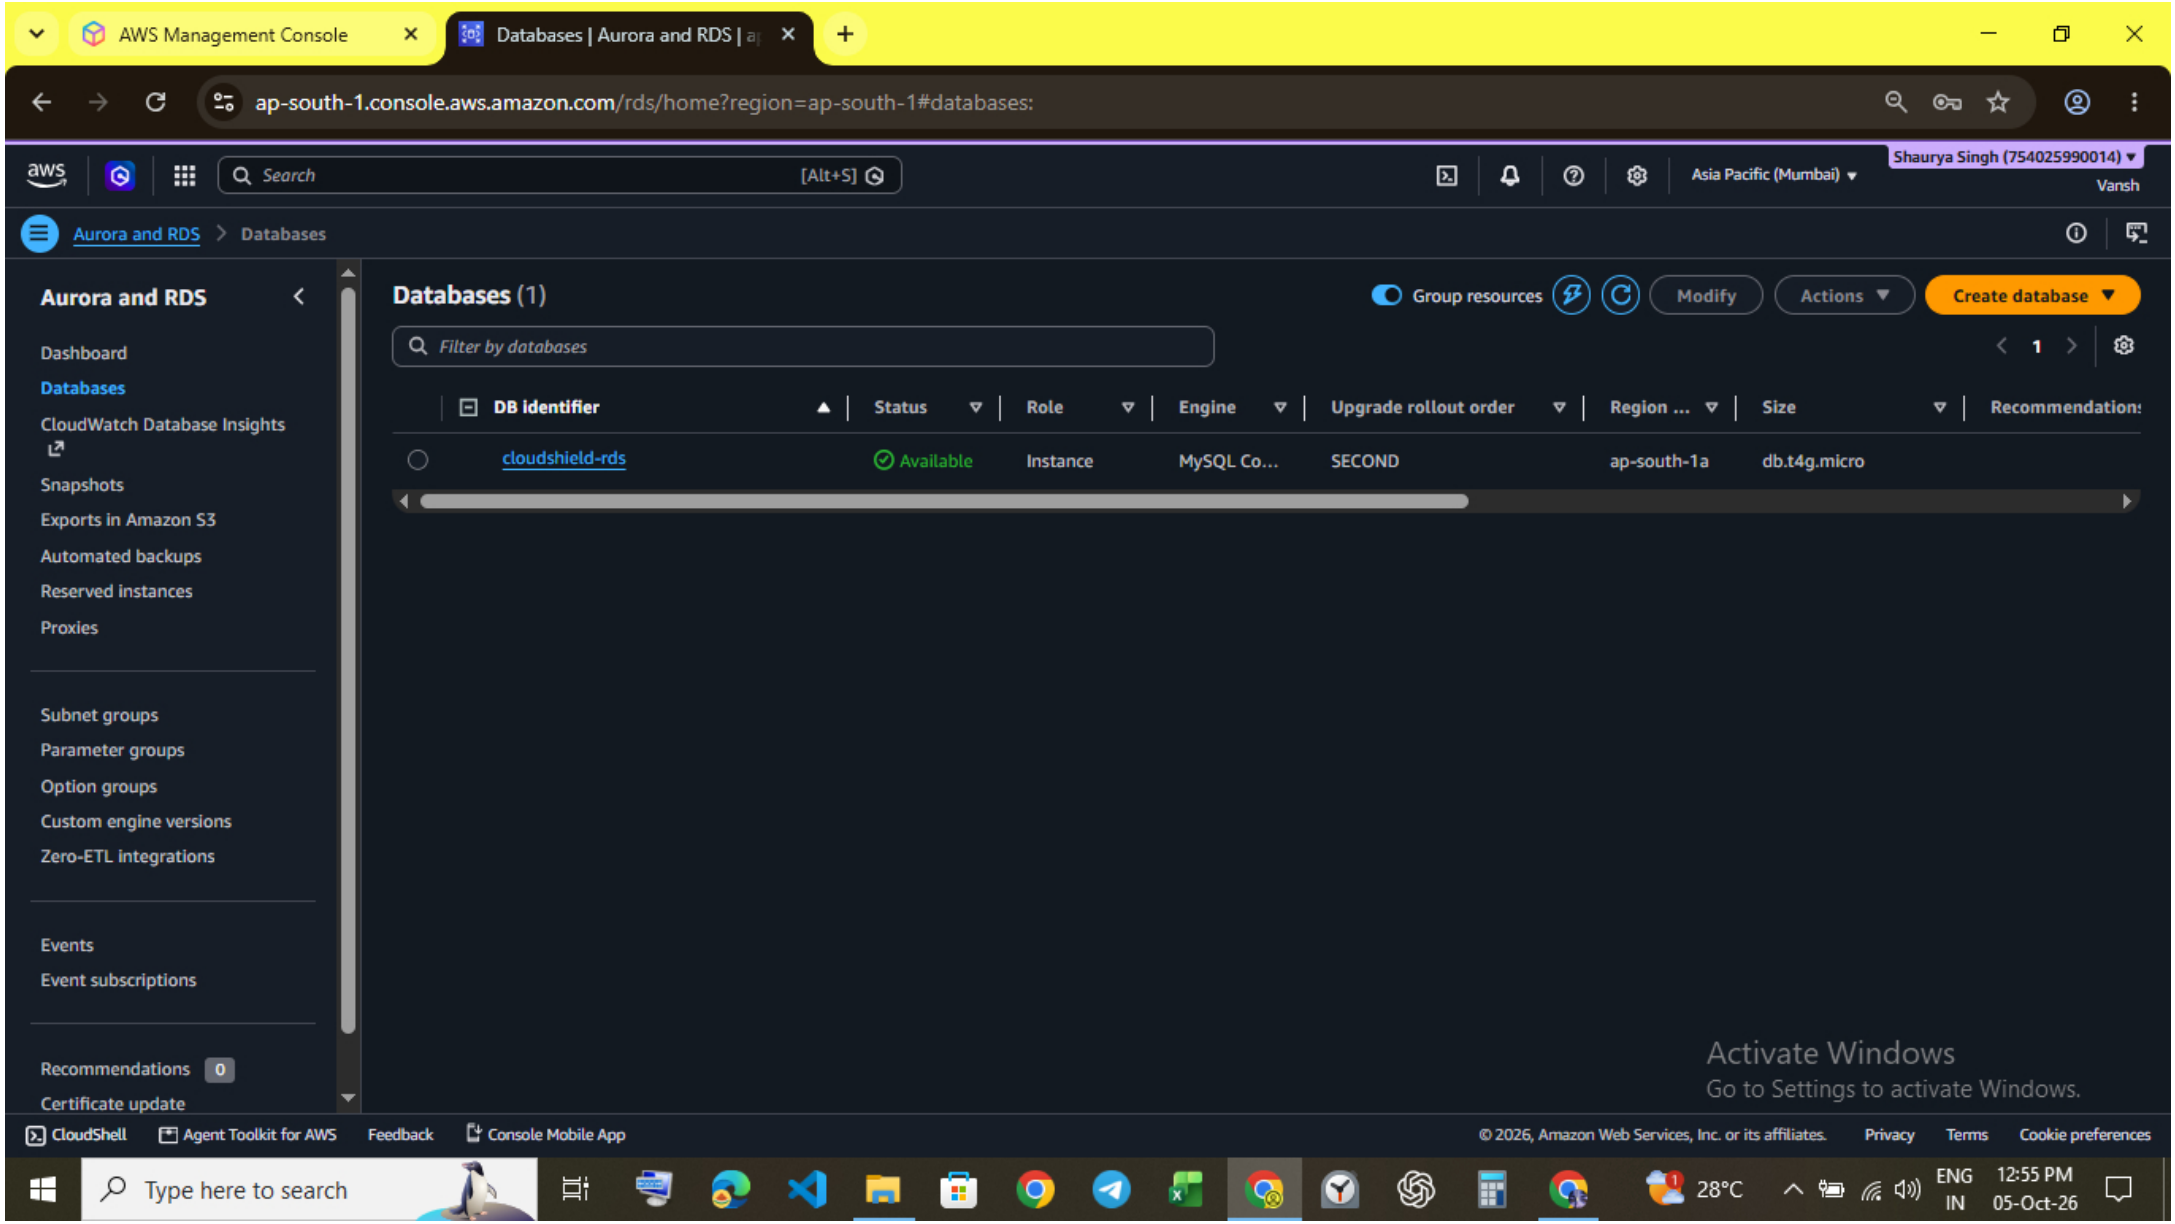

AWS Management Console
Create database | Aurora and R
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#launch-dbinstance:
Search
[Alt+S]
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
Aurora and RDS
Databases
Create database
After a database is created, you can't change its VPC.
DB subnet group Info
Choose the DB subnet group. The DB subnet group defines which subnets and IP ranges the DB instance can use in the VPC that you selected.
cloudshield-db-subnet-group
2 Subnets, 2 Availability Zones
Public access Info
Yes
RDS assigns a public IP address to the database. Amazon EC2 instances and other resources outside of the VPC can connect to your database. Resources inside the VPC can also connect to the database. Choose one or more VPC security groups that specify which resources can connect to the database.
No
RDS doesn't assign a public IP address to the database. Only Amazon EC2 instances and other resources inside the VPC can connect to your database. Choose one or more VPC security groups that specify which resources can connect to the database.
VPC security group (firewall) Info
Choose one or more VPC security groups to allow access to your database. Make sure that the security group rules allow the appropriate incoming traffic.
Choose existing
Choose existing VPC security groups
Create new
Create new VPC security group
Existing VPC security groups
Choose one or more options
RDS-SG
Availability Zone Info
ap-south-1a
RDS Proxy
RDS Proxy is a fully managed, highly available database proxy that improves application scalability, resiliency, and security.
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
Hot...
ENG
IN
11:49 AM
05-Oct-26

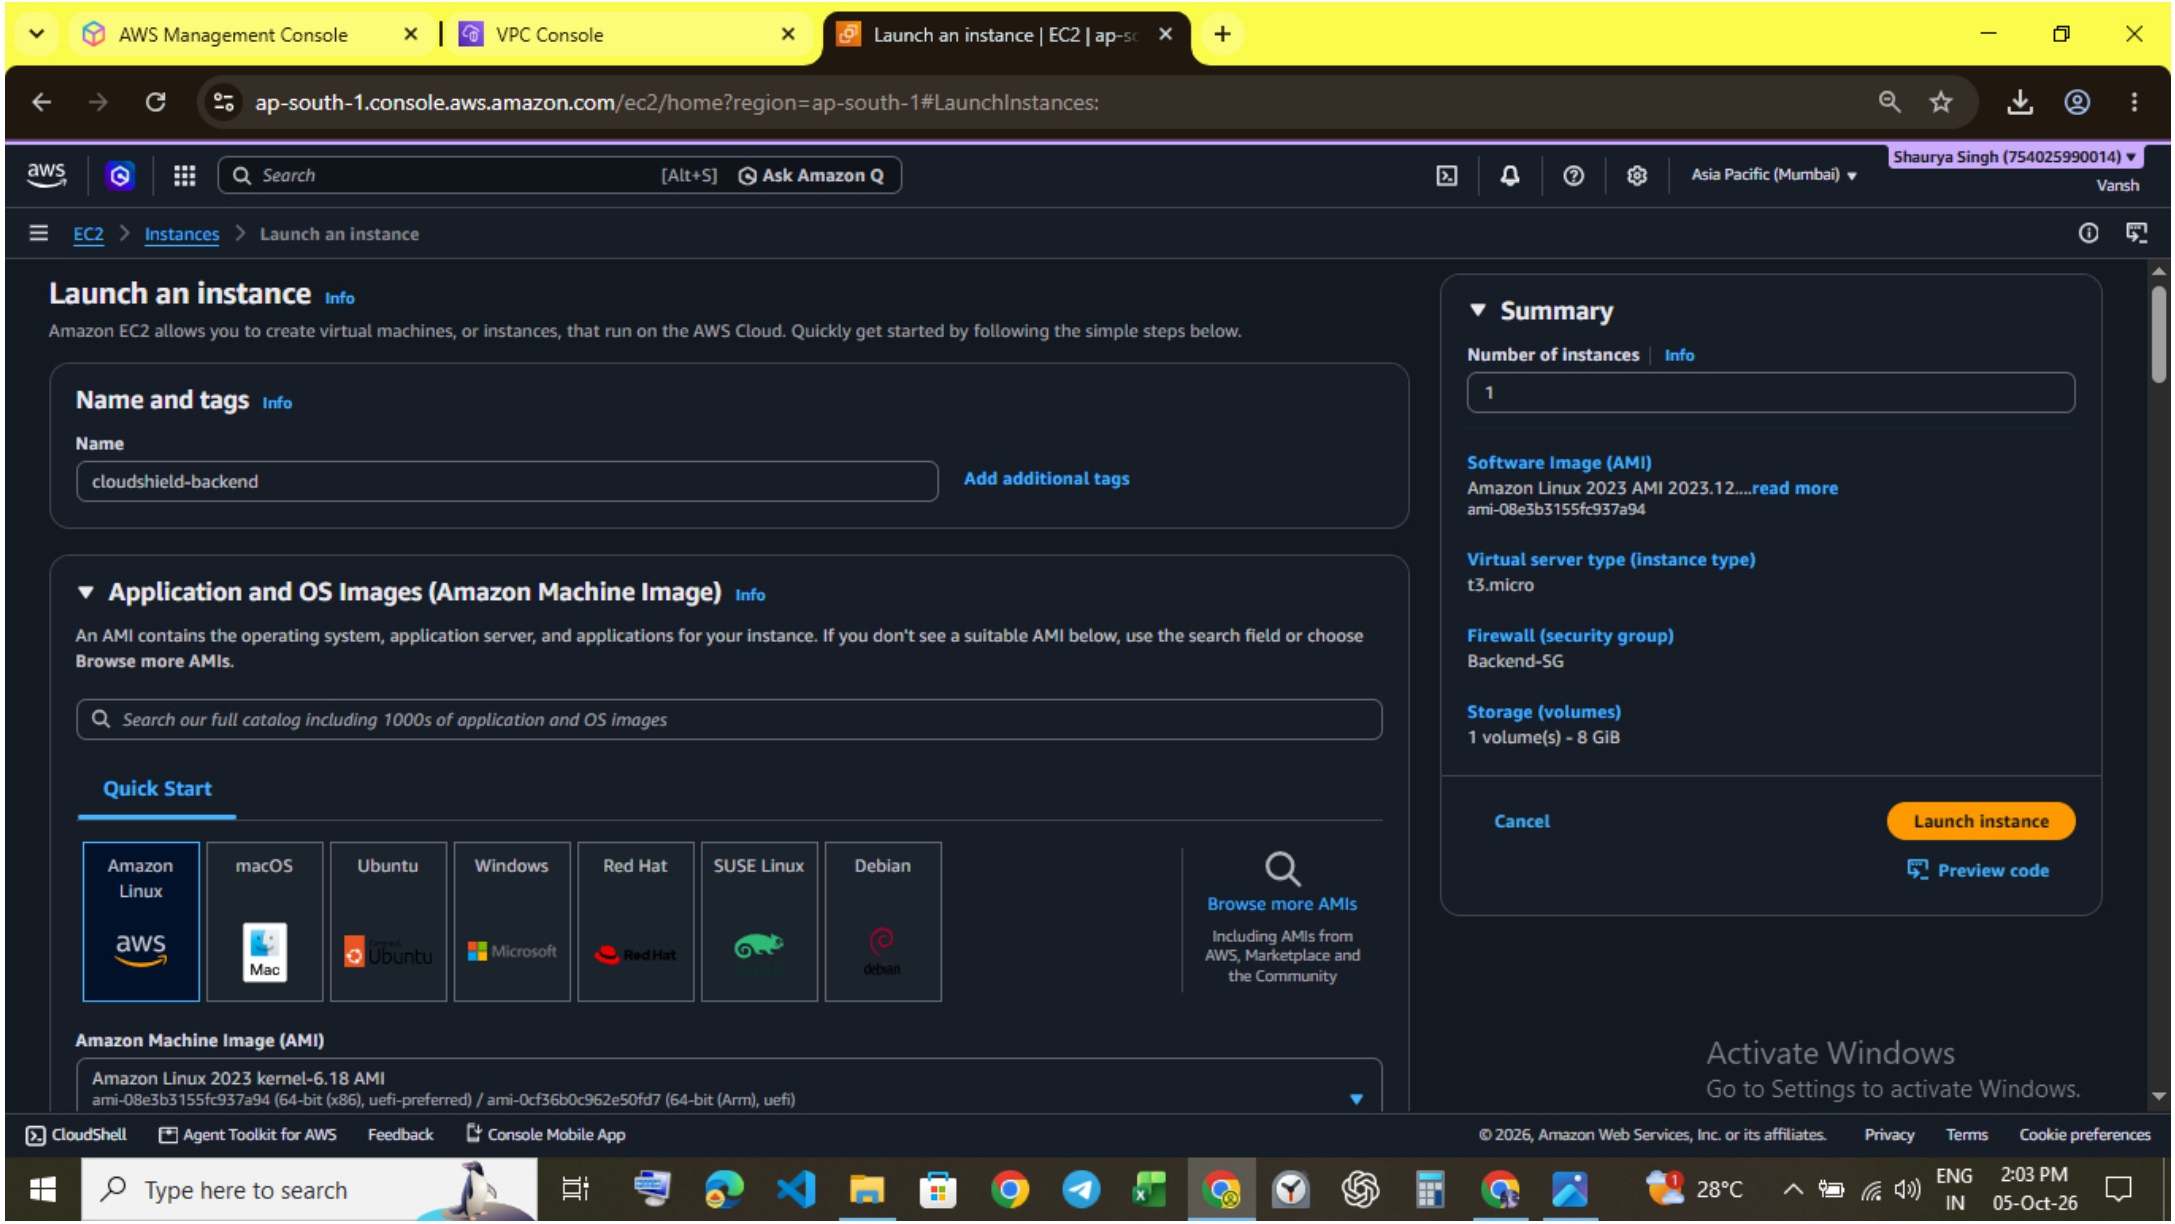

AWS Management Console
Create database | Aurora and R
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#launch-dbinstance:
Search
[Alt+S]
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
Aurora and RDS
Databases
Create database
RDS Proxy
RDS Proxy is a fully managed, highly available database proxy that improves application scalability, resiliency, and security.
Create an RDS Proxy Info
RDS automatically creates an IAM role and a Secrets Manager secret for the proxy. RDS Proxy has additional costs. For more information, see Amazon RDS Proxy pricing.
Certificate authority - optional Info
Using a server certificate provides an extra layer of security by validating that the connection is being made to an Amazon database. It does so by checking the server certificate that is automatically installed on all databases that you provision.
rds-ca-rsa2048-g1 (default)
Expiry: May 20, 2061
If you don't select a certificate authority, RDS chooses one for you.
Additional configuration
Tags - optional
A tag consists of a case-sensitive key-value pair.
No tags associated with the resource.
Add new tag
You can add up to 50 more tags.
Monitoring Info
Choose the monitoring configuration for this database. The Standard mode of Database Insights offers seven days of retention for detailed database metrics at no additional charge. The Advanced mode offers fleet-level monitoring and premium features, including the long-term retention of database metrics. Database Insights pricing is separate from RDS monthly estimates. See Amazon CloudWatch pricing.
Database Insights - Advanced
Database Insights - Standard
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
Hot...
ENG
IN
11:49 AM
05-Oct-26

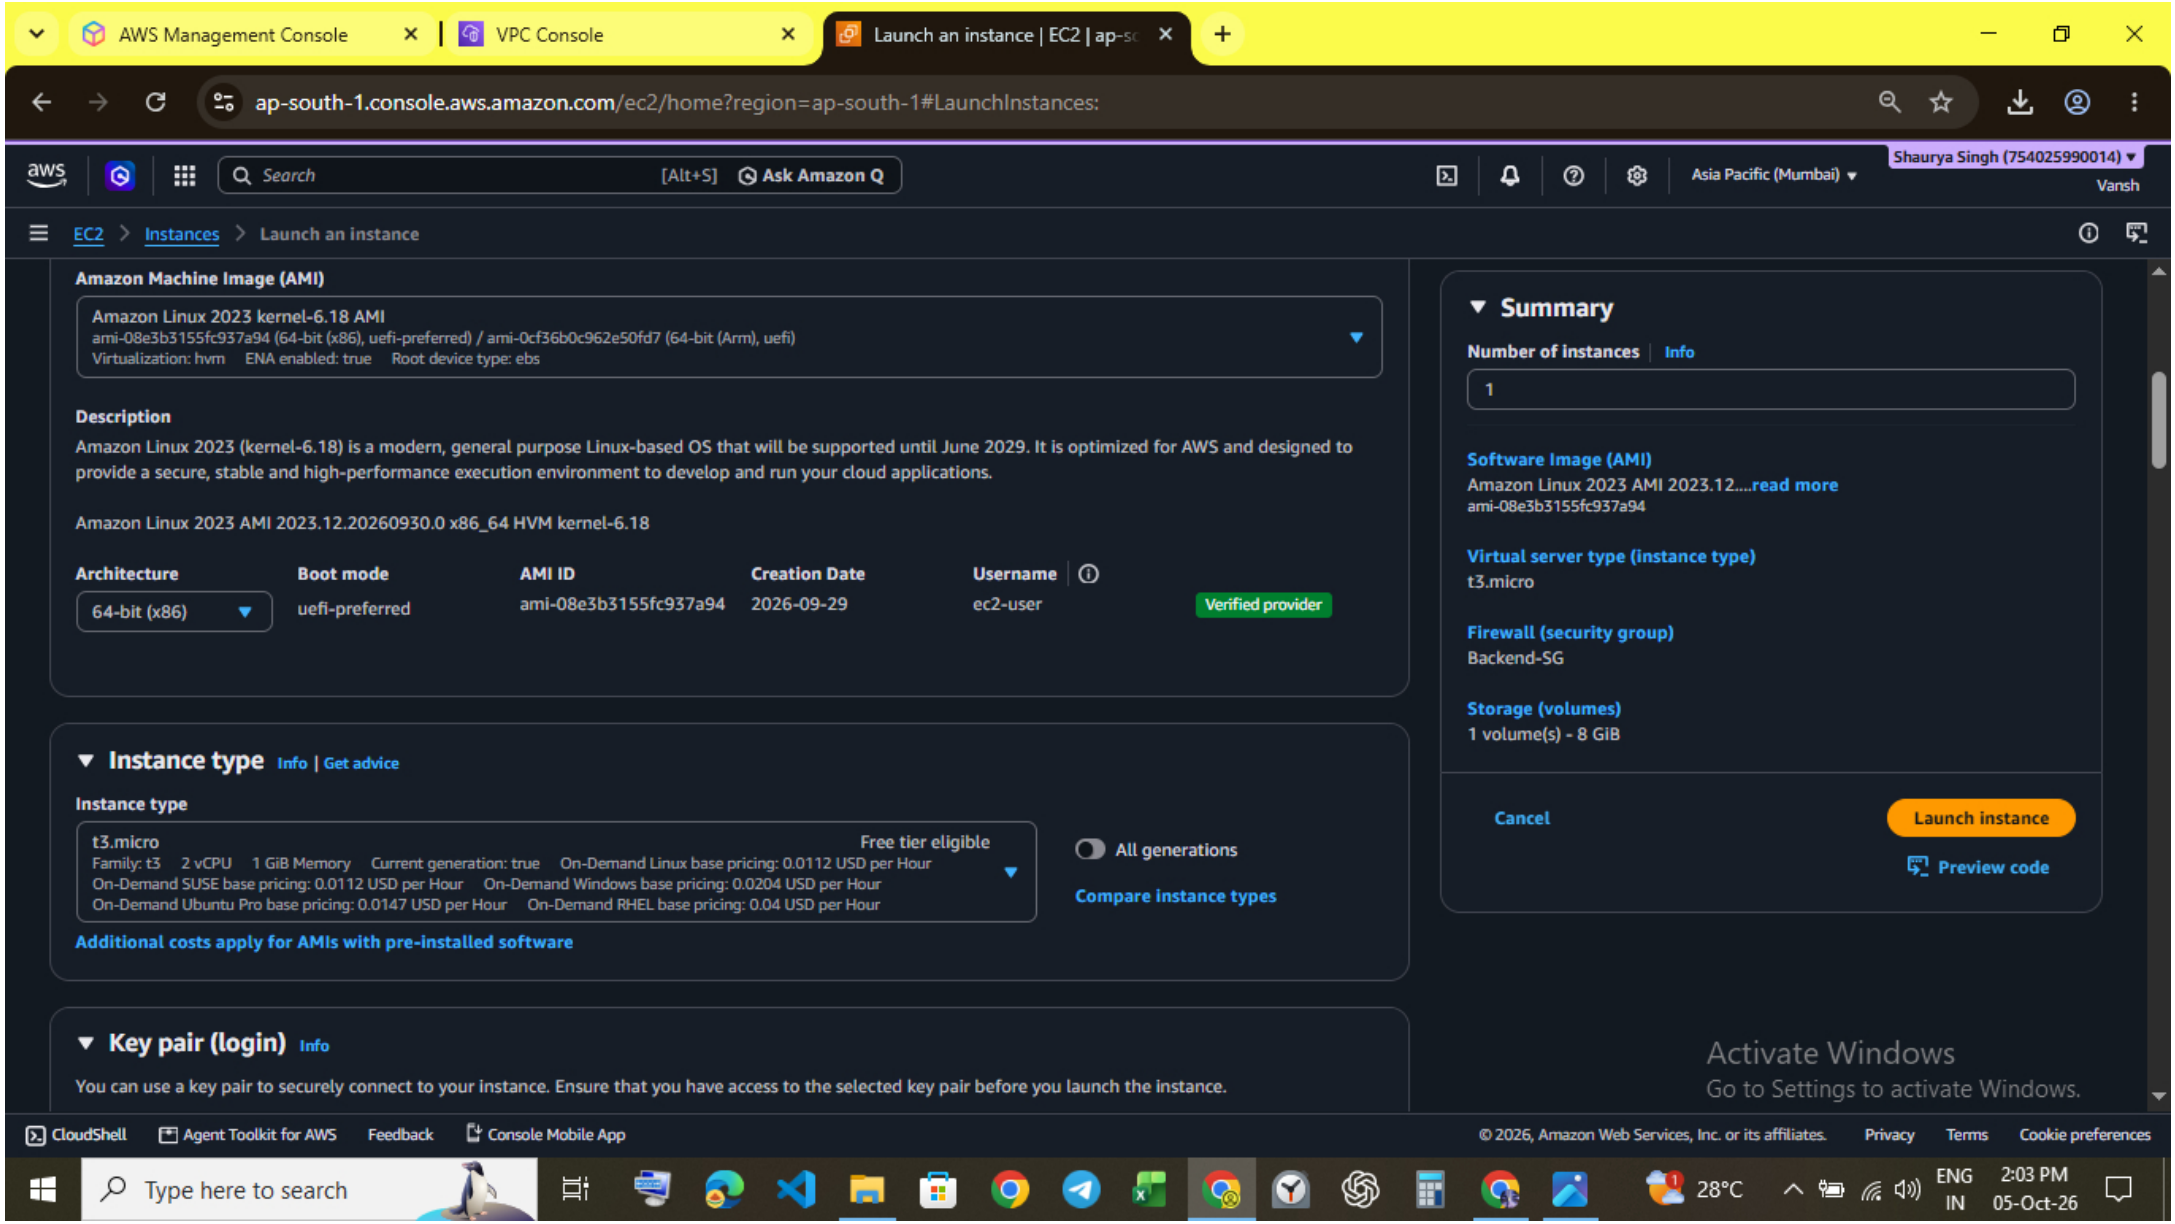

AWS Management Console
Create database | Aurora and R
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#launch-dbinstance:
Search
[Alt+S]
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
Aurora and RDS
Databases
Create database
Monitoring Info
Choose the monitoring configuration for this database. The Standard mode of Database Insights offers seven days of retention for detailed database metrics at no additional charge. The Advanced mode offers fleet-level monitoring and premium features, including the long-term retention of database metrics. Database Insights pricing is separate from RDS monthly estimates. See Amazon CloudWatch pricing.
Database Insights - Advanced
Fleet-level monitoring
Integration with CloudWatch Application Signals
Detailed database and per-query metrics (extended retention at no additional charge)
Database Insights - Standard
Additional monitoring settings
Enhanced Monitoring, CloudWatch Logs and DevOps Guru
Additional configuration
Database options, encryption turned on, backup turned on, backtrack turned off, maintenance, CloudWatch Logs, delete protection turned off.
Database options
Initial database name Info
cloudshield
If you do not specify a database name, Amazon RDS does not create a database.
DB parameter group Info
default.mysql8.4
Option group Info
default:mysql-8-4
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
Hot...
ENG
IN
11:49 AM
05-Oct-26

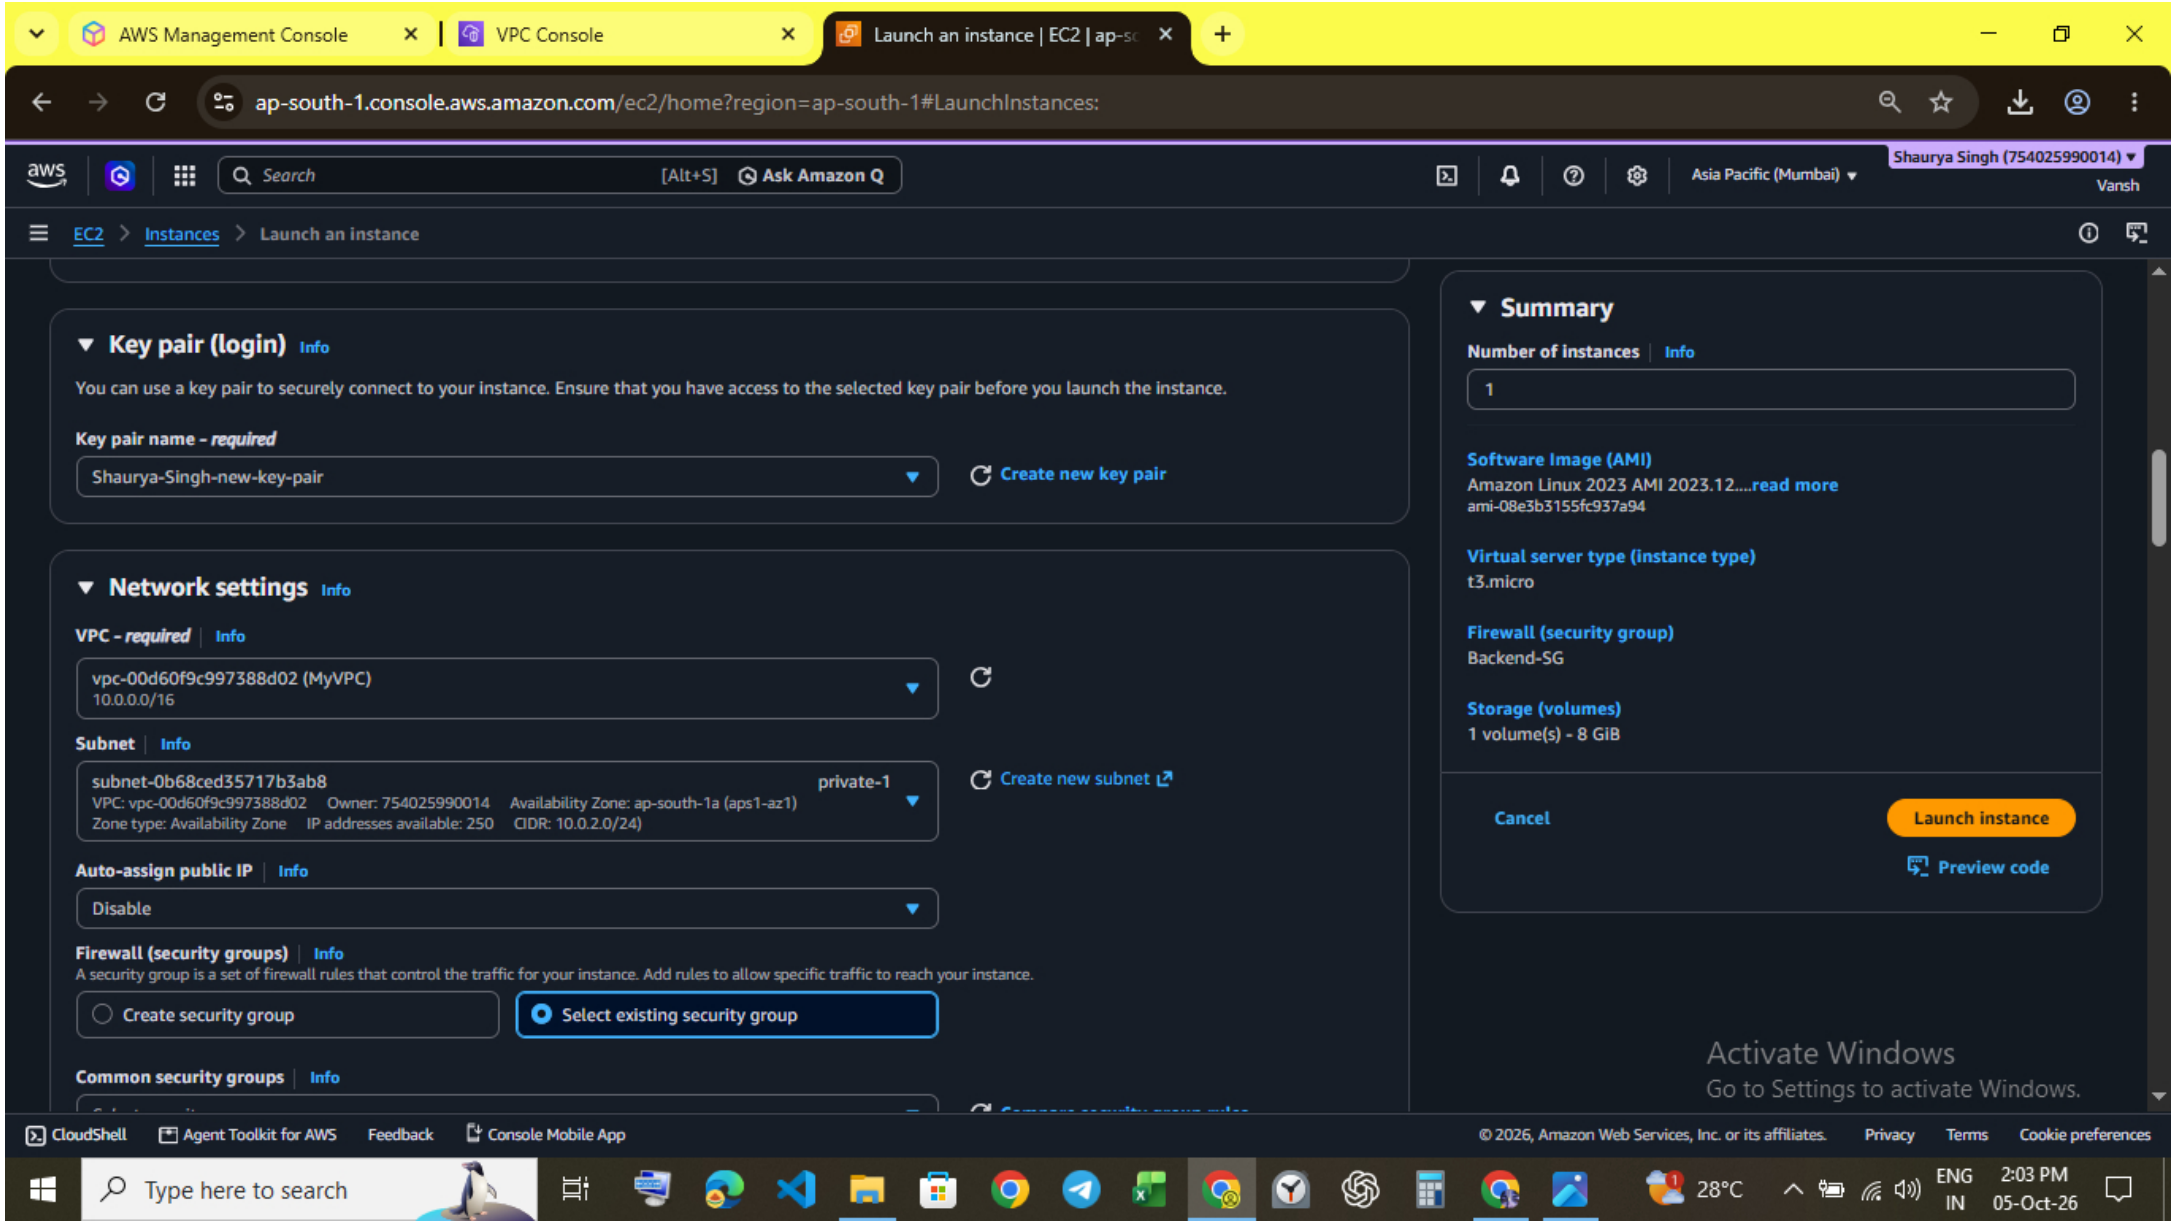

AWS Management Console
Create database | Aurora and R
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#launch-dbinstance:
Search
[Alt+S]
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
Aurora and RDS
Databases
Create database
Option group Info
default:mysql-8-4
Enable encryption
Choose to encrypt the given instance. Master key IDs and aliases appear in the list after they have been created using the AWS Key Management Service console.
AWS KMS key Info
(default) aws/rds
Account
754025990014
KMS key ID
alias/aws/rds
Backup
Enable automated backup
Creates a point-in-time snapshot of your database
Please note that automated backups are currently supported for InnoDB storage engine only. If you are using MyISAM, refer to details here.
Backup retention period Info
The number of days (1-35) for which automatic backups are kept.
1
day
Backup window Info
The daily time range (in UTC) during which RDS takes automated backups.
Choose a window
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
Hot...
ENG
IN
11:49 AM
05-Oct-26

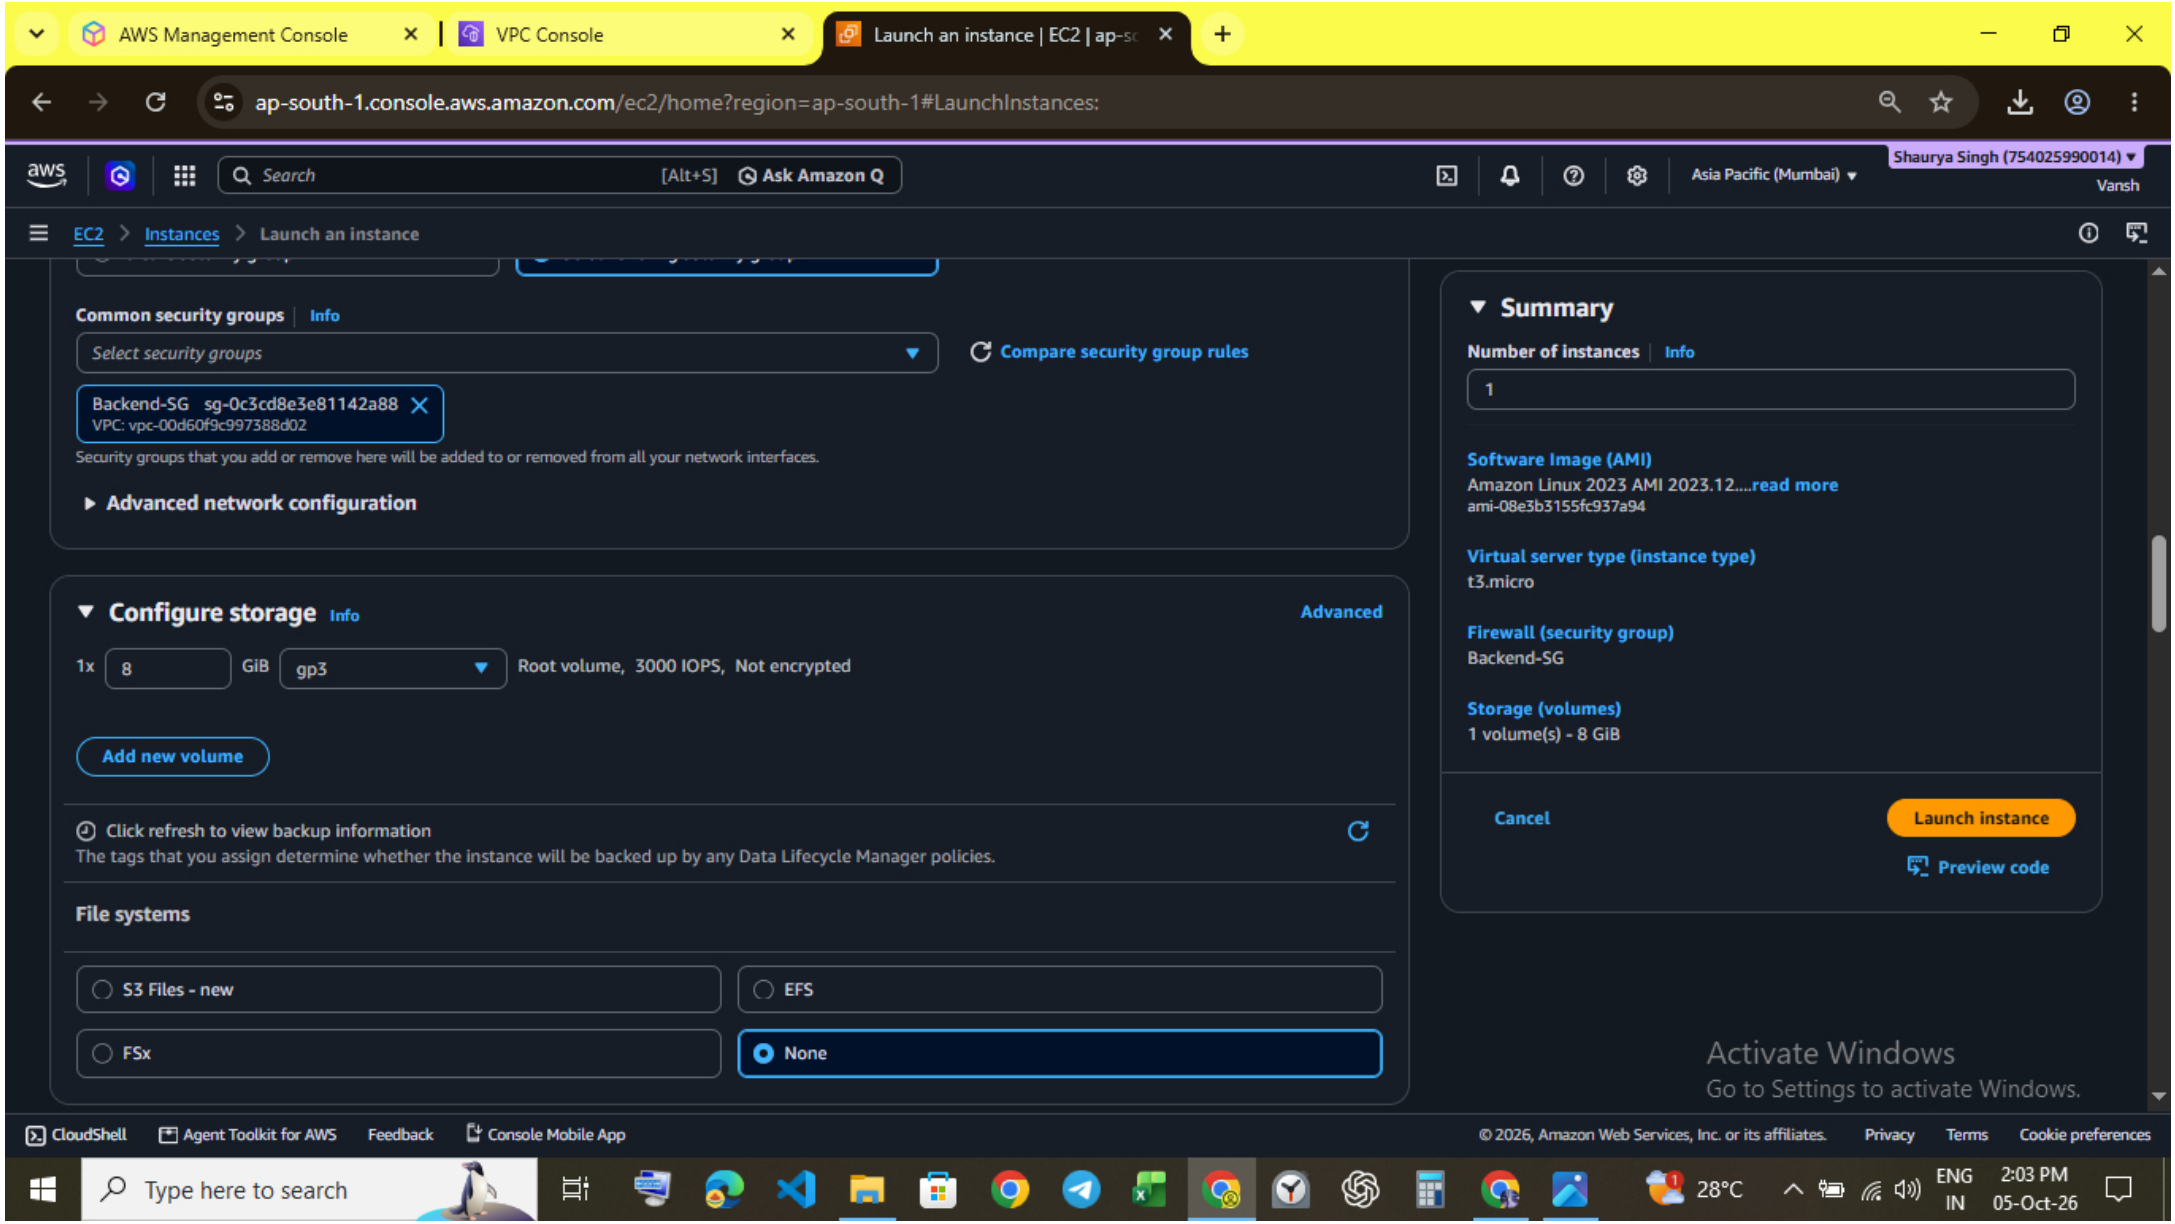

AWS Management Console
Create database | Aurora and R
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#launch-dbinstance:
Search
[Alt+S]
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
Aurora and RDS
Databases
Create database
Backup retention period Info
The number of days (1-35) for which automatic backups are kept.
1
day
Backup window Info
The daily time range (in UTC) during which RDS takes automated backups.
Choose a window
No preference
Backup tags Info
Copies tags from the source database to the automated backup and snapshots respectively.
Copy tags to automated backup
This is a one-time setting. Future tag modifications need manual updates.
Copy tags to snapshots
Backup replication Info
Enable replication in another AWS Region
Enabling replication automatically creates backups of your DB instance in the selected Region, for disaster recovery, in addition to the current Region.
Maintenance
Auto minor version upgrade Info
Enable auto minor version upgrade
Enabling auto minor version upgrade will automatically upgrade your database minor version. For limitations and more details, see Automatically upgrading the minor engine version documentation.
Maintenance window Info
Select the period you want pending modifications or maintenance applied to the database by Amazon RDS.
Choose a window
No preference
Enable deletion protection
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
ENG
IN
11:49 AM
05-Oct-26

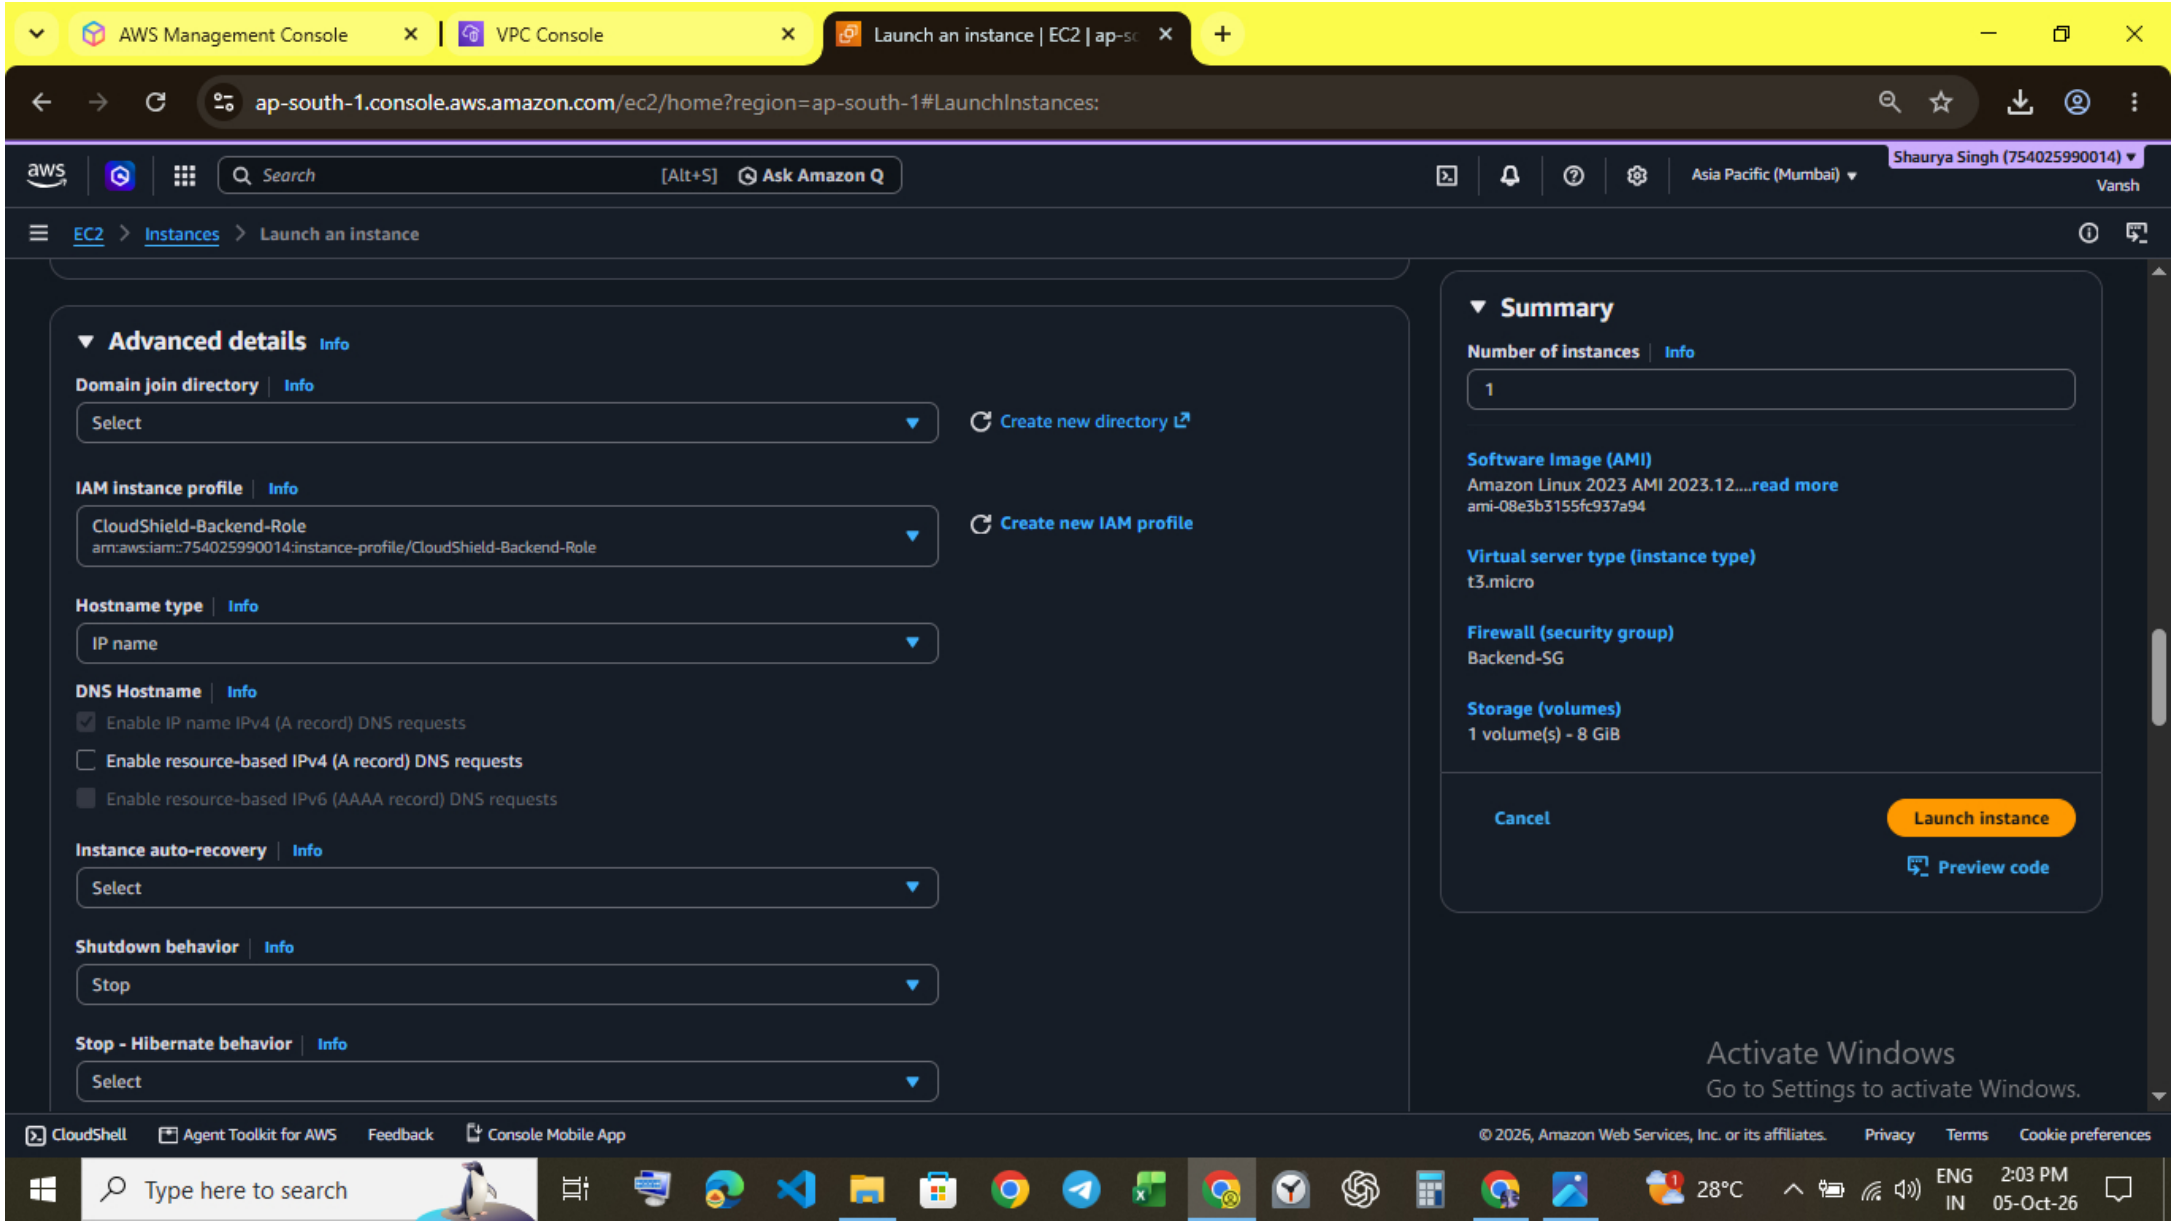

AWS Management Console
Databases | Aurora and RDS |
ap-south-1.console.aws.amazon.com/rds/home?region=ap-south-1#databases:
Search
[Alt+S]
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
Aurora and RDS
Databases
Aurora and RDS
Dashboard
Databases
CloudWatch Database Insights
Snapshots
Exports in Amazon S3
Automated backups
Reserved instances
Proxies
Subnet groups
Parameter groups
Option groups
Custom engine versions
Zero-ETL integrations
Events
Event subscriptions
Recommendations 0
Certificate update
Databases (1)
Group resources
Modify
Actions
Create database
Filter by databases
DB identifier
Status
Role
Engine
Upgrade rollout order
Region ...
Size
Recommendations
cloudshield-rds
Available
Instance
MySQL Co...
SECOND
ap-south-1a
db.t4g.micro
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
28°C
ENG
IN
12:55 PM
05-Oct-26

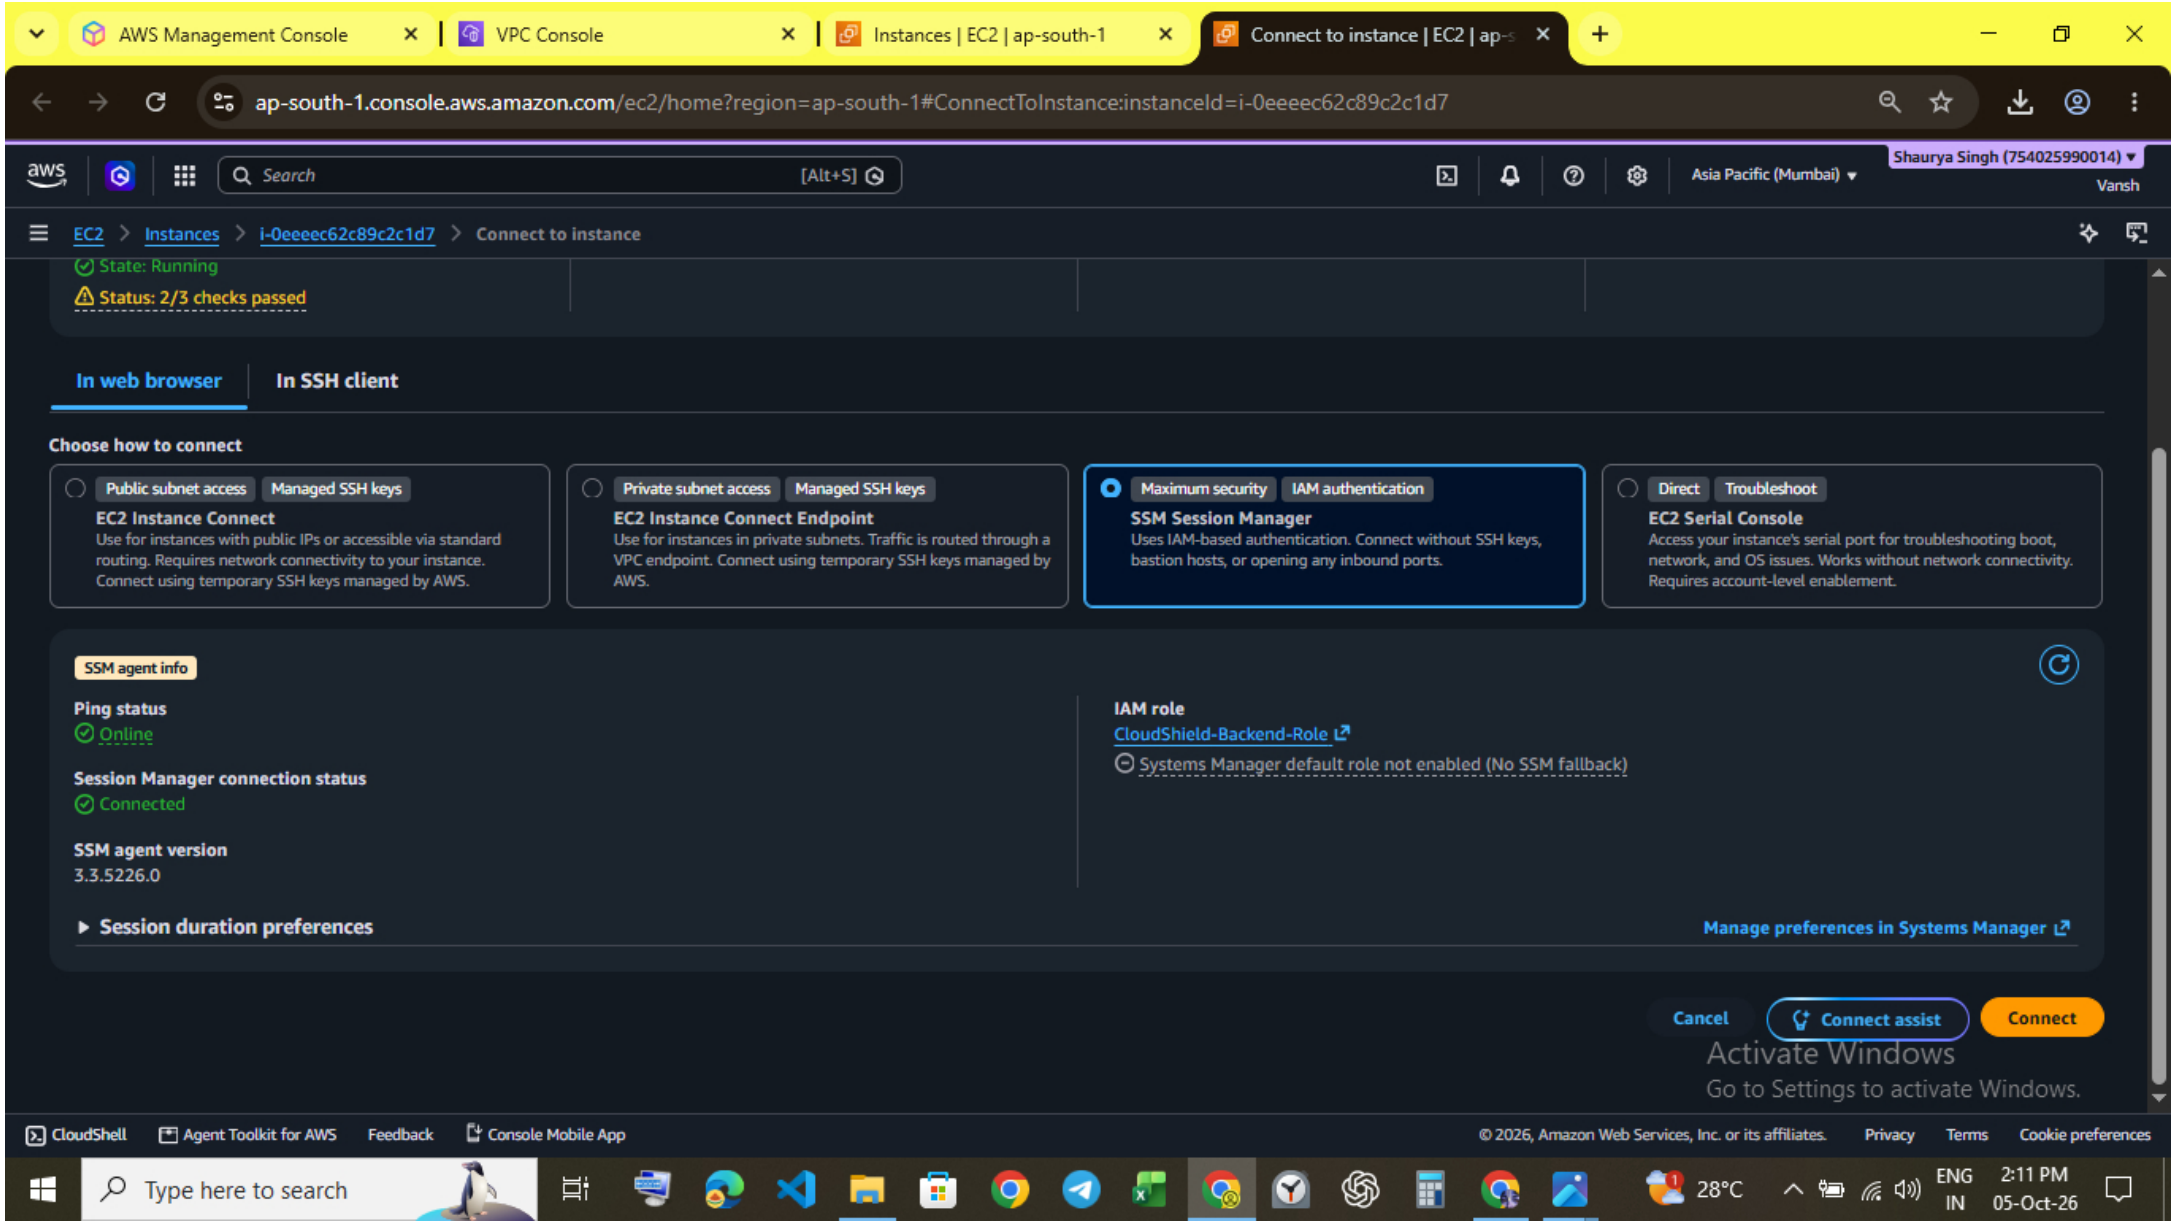

AWS Management Console
VPC Console
Launch an instance | EC2 | ap-s
ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#LaunchInstances:
Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
EC2 > Instances > Launch an instance
Launch an instance Info
Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.
Name and tags Info
Name
cloudshield-backend
Add additional tags
Application and OS Images (Amazon Machine Image) Info
An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose Browse more AMIs.
Search our full catalog including 1000s of application and OS images
Quick Start
Amazon Linux
macOS
Ubuntu
Windows
Red Hat
SUSE Linux
Debian
Browse more AMIs
Including AMIs from AWS, Marketplace and the Community
Amazon Machine Image (AMI)
Amazon Linux 2023 kernel-6.18 AMI
ami-08e3b3155fc937a94 (64-bit (x86), uefi-preferred) / ami-0cf36b0c962e50fd7 (64-bit (Arm), uefi)
Summary
Number of instances Info
1
Software Image (AMI)
Amazon Linux 2023 AMI 2023.12....read more
ami-08e3b3155fc937a94
Virtual server type (instance type)
t3.micro
Firewall (security group)
Backend-SG
Storage (volumes)
1 volume(s) - 8 GiB
Cancel
Launch instance
Preview code
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
28°C
ENG
IN
2:03 PM
05-Oct-26

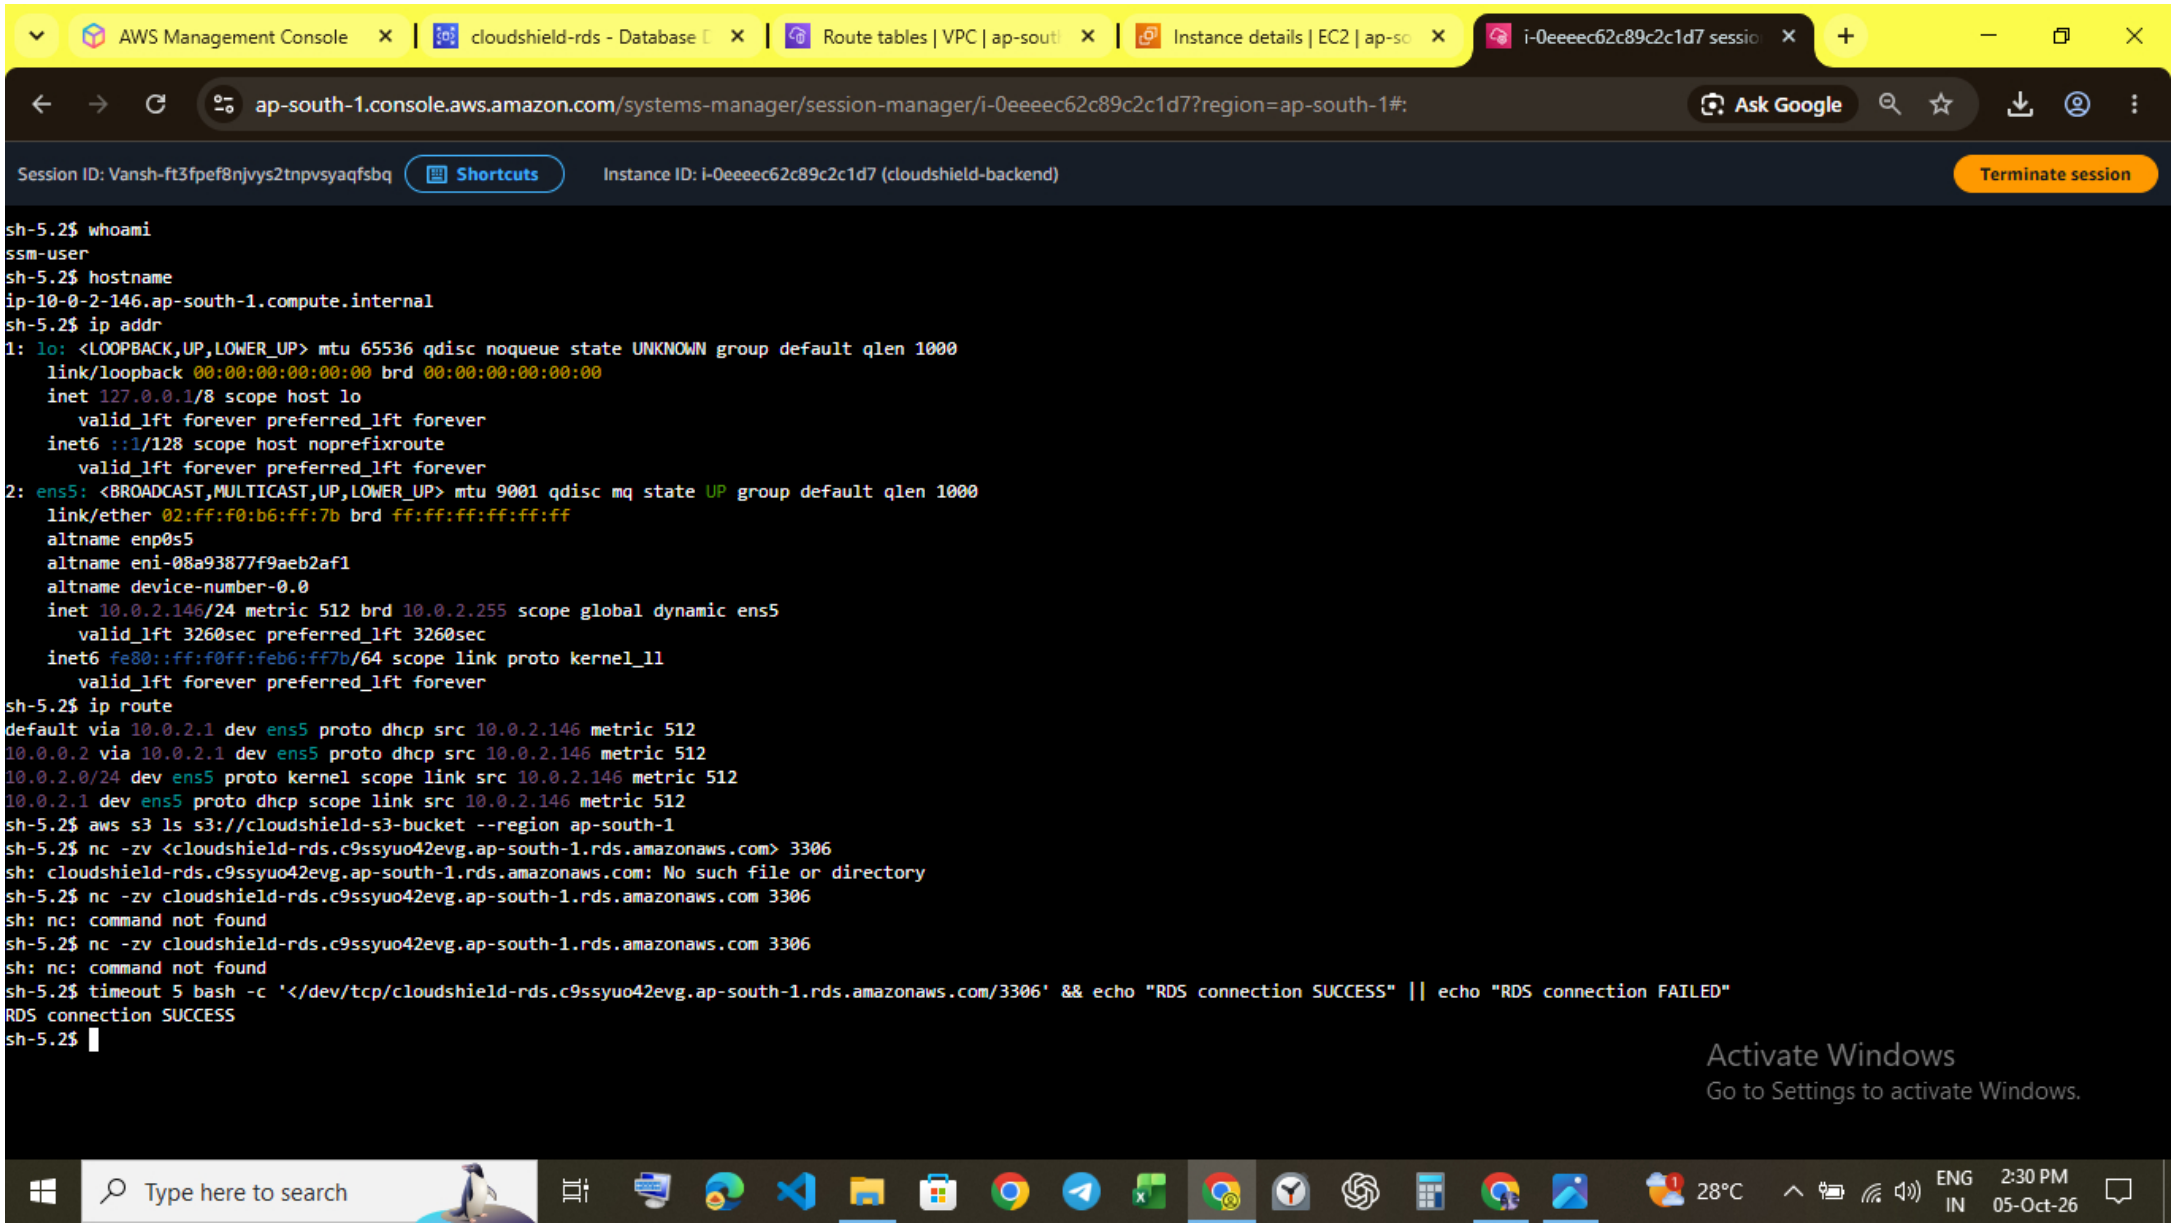

AWS Management Console
VPC Console
Launch an instance | EC2 | ap-s
ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#LaunchInstances:
Search [Alt+S] Ask Amazon Q
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
EC2 > Instances > Launch an instance
Amazon Machine Image (AMI)
Amazon Linux 2023 kernel-6.18 AMI
ami-08e3b3155fc937a94 (64-bit (x86), uefi-preferred) / ami-0cf36b0c962e50fd7 (64-bit (Arm), uefi)
Virtualization: hvm ENA enabled: true Root device type: ebs
Description
Amazon Linux 2023 (kernel-6.18) is a modern, general purpose Linux-based OS that will be supported until June 2029. It is optimized for AWS and designed to provide a secure, stable and high-performance execution environment to develop and run your cloud applications.
Amazon Linux 2023 AMI 2023.12.20260930.0 x86_64 HVM kernel-6.18
Architecture
64-bit (x86)
Boot mode
uefi-preferred
AMI ID
ami-08e3b3155fc937a94
Creation Date
2026-09-29
Username
ec2-user
Verified provider
Instance type Info | Get advice
Instance type
t3.micro
Free tier eligible
Family: t3 2 vCPU 1 GiB Memory Current generation: true On-Demand Linux base pricing: 0.0112 USD per Hour
On-Demand SUSE base pricing: 0.0112 USD per Hour On-Demand Windows base pricing: 0.0204 USD per Hour
On-Demand Ubuntu Pro base pricing: 0.0147 USD per Hour On-Demand RHEL base pricing: 0.04 USD per Hour
All generations
Compare instance types
Additional costs apply for AMIs with pre-installed software
Key pair (login) Info
You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.
Summary
Number of instances Info
1
Software Image (AMI)
Amazon Linux 2023 AMI 2023.12....read more
ami-08e3b3155fc937a94
Virtual server type (instance type)
t3.micro
Firewall (security group)
Backend-SG
Storage (volumes)
1 volume(s) - 8 GiB
Cancel
Launch instance
Preview code
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
28°C
ENG
IN
2:03 PM
05-Oct-26


AWS Management Console
VPC Console
Launch an instance | EC2 | ap-s
ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#LaunchInstances:
Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
EC2 > Instances > Launch an instance
Key pair (login) Info
You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.
Key pair name - required
Shaurya-Singh-new-key-pair
Create new key pair
Network settings Info
VPC - required | Info
vpc-00d60f9c997388d02 (MyVPC)
10.0.0.0/16
Subnet | Info
subnet-0b68ced35717b3ab8 private-1
VPC: vpc-00d60f9c997388d02 Owner: 754025990014 Availability Zone: ap-south-1a (aps1-az1)
Zone type: Availability Zone IP addresses available: 250 CIDR: 10.0.2.0/24)
Create new subnet
Auto-assign public IP | Info
Disable
Firewall (security groups) | Info
A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.
Create security group
Select existing security group
Common security groups | Info
Summary
Number of instances | Info
1
Software Image (AMI)
Amazon Linux 2023 AMI 2023.12....read more
ami-08e3b3155fc937a94
Virtual server type (instance type)
t3.micro
Firewall (security group)
Backend-SG
Storage (volumes)
1 volume(s) - 8 GiB
Cancel
Launch instance
Preview code
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
28°C
ENG
IN
2:03 PM
05-Oct-26


AWS Management Console
VPC Console
Launch an instance | EC2 | ap-s
ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#LaunchInstances:
Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
EC2 > Instances > Launch an instance
Common security groups | Info
Select security groups
Compare security group rules
Backend-SG sg-0c3cd8e3e81142a88
VPC: vpc-00d60f9c997388d02
Security groups that you add or remove here will be added to or removed from all your network interfaces.
Advanced network configuration
Configure storage Info
Advanced
1x 8 GiB gp3 Root volume, 3000 IOPS, Not encrypted
Add new volume
Click refresh to view backup information
The tags that you assign determine whether the instance will be backed up by any Data Lifecycle Manager policies.
File systems
S3 Files - new
EFS
FSx
None
Summary
Number of instances | Info
1
Software Image (AMI)
Amazon Linux 2023 AMI 2023.12....read more
ami-08e3b3155fc937a94
Virtual server type (instance type)
t3.micro
Firewall (security group)
Backend-SG
Storage (volumes)
1 volume(s) - 8 GiB
Cancel
Launch instance
Preview code
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
28°C
ENG
IN
2:03 PM
05-Oct-26


AWS Management Console
VPC Console
Launch an instance | EC2 | ap-s
ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#LaunchInstances:
Search
[Alt+S]
Ask Amazon Q
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
EC2 > Instances > Launch an instance
Advanced details Info
Domain join directory Info
Select
Create new directory
IAM instance profile Info
CloudShield-Backend-Role
arn:aws:iam::754025990014:instance-profile/CloudShield-Backend-Role
Create new IAM profile
Hostname type Info
IP name
DNS Hostname Info
Enable IP name IPv4 (A record) DNS requests
Enable resource-based IPv4 (A record) DNS requests
Enable resource-based IPv6 (AAAA record) DNS requests
Instance auto-recovery Info
Select
Shutdown behavior Info
Stop
Stop - Hibernate behavior Info
Select
Summary
Number of instances Info
1
Software Image (AMI)
Amazon Linux 2023 AMI 2023.12....read more
ami-08e3b3155fc937a94
Virtual server type (instance type)
t3.micro
Firewall (security group)
Backend-SG
Storage (volumes)
1 volume(s) - 8 GiB
Cancel
Launch instance
Preview code
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
28°C
ENG
IN
2:03 PM
05-Oct-26


AWS Management Console
VPC Console
Instances | EC2 | ap-south-1
Connect to instance | EC2 | ap-s
ap-south-1.console.aws.amazon.com/ec2/home?region=ap-south-1#ConnectToInstance:instanceId=i-0eeeec62c89c2c1d7
Search [Alt+S]
Asia Pacific (Mumbai)
Shaurya Singh (754025990014)
Vansh
EC2 > Instances > i-0eeeec62c89c2c1d7 > Connect to instance
State: Running
Status: 2/3 checks passed
In web browser
In SSH client
Choose how to connect
Public subnet access
Managed SSH keys
EC2 Instance Connect
Use for instances with public IPs or accessible via standard routing. Requires network connectivity to your instance. Connect using temporary SSH keys managed by AWS.
Private subnet access
Managed SSH keys
EC2 Instance Connect Endpoint
Use for instances in private subnets. Traffic is routed through a VPC endpoint. Connect using temporary SSH keys managed by AWS.
Maximum security
IAM authentication
SSM Session Manager
Uses IAM-based authentication. Connect without SSH keys, bastion hosts, or opening any inbound ports.
Direct
Troubleshoot
EC2 Serial Console
Access your instance's serial port for troubleshooting boot, network, and OS issues. Works without network connectivity. Requires account-level enablement.
SSM agent info
Ping status
Online
Session Manager connection status
Connected
SSM agent version
3.3.5226.0
IAM role
CloudShield-Backend-Role
Systems Manager default role not enabled (No SSM fallback)
Session duration preferences
Manage preferences in Systems Manager
Cancel
Connect assist
Connect
Activate Windows
Go to Settings to activate Windows.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Type here to search
28°C
ENG
IN
2:11 PM
05-Oct-26


AWS Management Console
cloudshield-rds - Database
Route tables | VPC | ap-south
Instance details | EC2 | ap-south
i-0eeeec62c89c2c1d7 session
ap-south-1.console.aws.amazon.com/systems-manager/session-manager/i-0eeeec62c89c2c1d7?region=ap-south-1#:
Ask Google
Session ID: Vansh-ft3fpef8njvys2tnpvsyaqfsbq
Shortcuts
Instance ID: i-0eeeec62c89c2c1d7 (cloudshield-backend)
Terminate session
sh-5.2$ whoami
ssm-user
sh-5.2$ hostname
ip-10-0-2-146.ap-south-1.compute.internal
sh-5.2$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
inet 127.0.0.1/8 scope host lo
valid_lft forever preferred_lft forever
inet6 ::1/128 scope host noprefixroute
valid_lft forever preferred_lft forever
2: ens5: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 9001 qdisc mq state UP group default qlen 1000
link/ether 02:ff:f0:b6:ff:7b brd ff:ff:ff:ff:ff:ff
altname enp0s5
altname eni-08a93877f9aeb2af1
altname device-number-0.0
inet 10.0.2.146/24 metric 512 brd 10.0.2.255 scope global dynamic ens5
valid_lft 3260sec preferred_lft 3260sec
inet6 fe80::ff:f0ff:feb6:ff7b/64 scope link proto kernel_ll
valid_lft forever preferred_lft forever
sh-5.2$ ip route
default via 10.0.2.1 dev ens5 proto dhcp src 10.0.2.146 metric 512
10.0.0.2 via 10.0.2.1 dev ens5 proto dhcp src 10.0.2.146 metric 512
10.0.2.0/24 dev ens5 proto kernel scope link src 10.0.2.146 metric 512
10.0.2.1 dev ens5 proto dhcp scope link src 10.0.2.146 metric 512
sh-5.2$ aws s3 ls s3://cloudshield-s3-bucket --region ap-south-1
sh-5.2$ nc -zv <cloudshield-rds.c9ssyuo42evg.ap-south-1.rds.amazonaws.com> 3306
sh: cloudshield-rds.c9ssyuo42evg.ap-south-1.rds.amazonaws.com: No such file or directory
sh-5.2$ nc -zv cloudshield-rds.c9ssyuo42evg.ap-south-1.rds.amazonaws.com 3306
sh: nc: command not found
sh-5.2$ nc -zv cloudshield-rds.c9ssyuo42evg.ap-south-1.rds.amazonaws.com 3306
sh: nc: command not found
sh-5.2$ timeout 5 bash -c '</dev/tcp/cloudshield-rds.c9ssyuo42evg.ap-south-1.rds.amazonaws.com/3306' && echo "RDS connection SUCCESS" || echo "RDS connection FAILED"
RDS connection SUCCESS
sh-5.2$
Activate Windows
Go to Settings to activate Windows.
Type here to search
28°C
ENG
IN
2:30 PM
05-Oct-26