SPROCKET 72z9 (1:2)

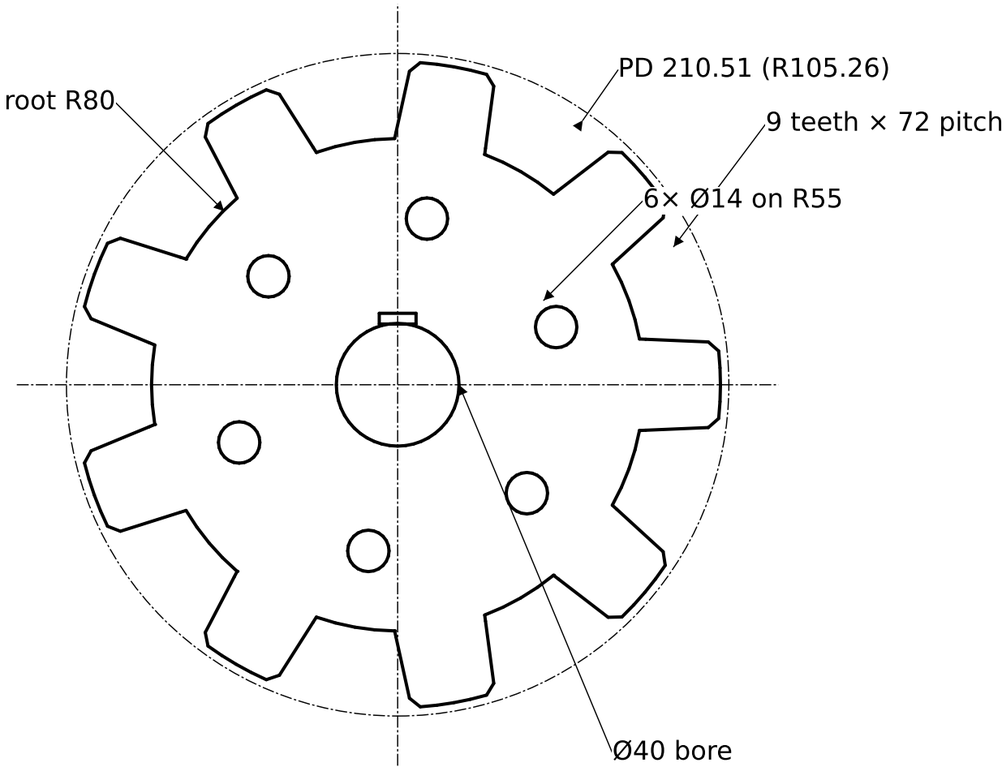

2 plates/side pack, 8 mm each; 6× Ø14 mount holes

HUB (1:1)

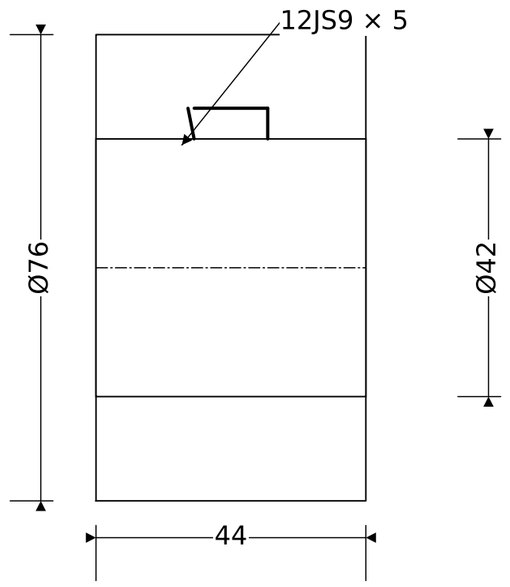

6 rings × 8 mm, faced

DRIVE PARTS

part	description	mat	qty
72z9	9T × 72, PD210.51, Ø40, 8 mm	E250	4
hub76	Ø76/Ø42 × 44, 12JS9	E250	2

NOTES

1. 72 mm pitch, 9 teeth, PD 210.51; laser 8 mm E250, 2 plates/side pack.
2. Tooth profile per sprocket_72z9.dxf; tip R105.26, root R80.
3. Bore Ø40; hub carries the 12JS9 keyway (outsource).
4. Hub: 6 rings Ø76/Ø42 × 8 mm, stacked 48, faced 44.
5. Pack 2 × 8 = 16 mm wide, centred on track (y=±260); hub 238..282 mm.

FLAIL MOWER 500 / UC-V2

SPROCKET 72z9 & HUB 76/42

DWG No. **UCV2-P-005** REV A

MATERIAL: E250 8 mm

QTY: 4 + 2

UNITS: mm

1st ANGLE

SCALE: 1:2 / 1:1

SIZE: A3

SHEET: 9 / 15

DATE: 2026-10-29

DRAWN: OC