



ESOF 322

Software Engineering

LECTURE: 3

J. L. Pach

OUTLINE:

- ⌘ GIT commands
- ⌘ working with branches

GIT COMMANDS

GIT COMMANDS

🔧 *init*

🔧 *status*

🔧 *add*

🔧 *commit*

🔧 *log*

🔧 **branch**

🔧 **switch / checkout**

🔧 **merge**

🔧 **diff**

🔧 **stash**

WHAT IS .GITIGNORE?

The `.gitignore` file tells Git which files or directories to ignore — meaning they won't be tracked, staged, or committed to the repository.

This is useful for:

- ✂ Temporary files (e.g., `.log`, `.tmp`)
- ✂ Build artifacts (e.g., `bin/`, `obj/`)
- ✂ IDE-specific files (e.g., `.vscode/`, `.DS_Store`)
- ✂ Secrets or configuration files (e.g., `.env`, `config.local.json`)

HOW IT WORKS - .GITIGNORE?

You create a file named `.gitignore` in the root of your repository and list patterns for files or folders you want Git to skip. Example:

```
*.log  
*.tmp  
node_modules/  
.env
```

- ✂ Git will ignore any file or folder that matches these patterns — even if they exist in your working directory.
- ✂ Use `.gitignore` to keep your repository clean and focused only on the files that matter. It helps avoid accidentally committing sensitive data or unnecessary clutter.

UNDERSTANDING .GITIGNORE – FILE, NOT A FOLDER

It's important to know that `.gitignore` is a **file**, not a folder. The naming convention comes from Linux/Unix systems, where files that start with a dot `.` are treated as hidden or configuration files. From a Windows perspective, `.gitignore` may appear as a file without a name and with an extension, or simply as a special file with no extension, starting with a dot. This can be confusing at first, but it's a common pattern in many development environments.


Examples of similar hidden/config files in Linux:

- ✂ `.ssh/` – stores SSH keys and config
- ✂ `.vscode/` – stores VS Code workspace settings

These dot-prefixed files and folders are used to configure tools and environments without cluttering the main workspace.

WHAT IS A GIT BRANCH?

A branch in Git is like a separate line of development. It allows you to work on new features, bug fixes, or experiments without affecting the main codebase. The default branch is usually called main or master.

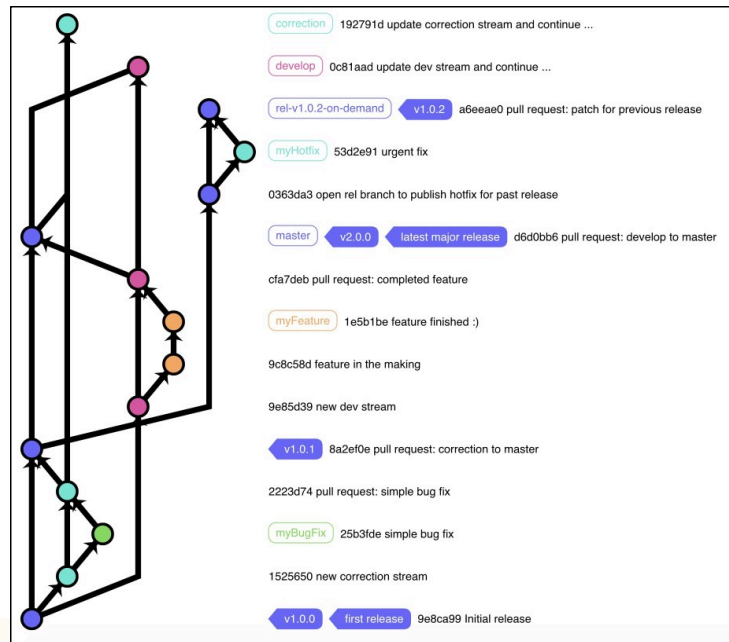

WHAT IS A GIT BRANCH?

- ✂ Branches help teams collaborate safely and efficiently by isolating changes until they're ready to be merged.
- ✂ Think of branches as parallel timelines. You can develop safely in one branch, test your changes, and merge them back when everything works. This is a core concept in modern version control.

GIT BRANCH – CREATE A NEW BRANCH

- ✖ The command `git branch` shows a list of all branches in your repository. The currently active branch is marked with an asterisk (*) `git branch new_branch`
- ✖ When working with a repository that has multiple branches, we can switch between them using two different commands. This is because modern versions of Git introduced standardized naming conventions, but the older commands were kept to ensure backward compatibility and to avoid forcing experienced users to relearn everything from scratch.

`$ git switch second_branch` or `$ git checkout second_branch`

GIT STATUS & GIT BRANCH

```
git branch
* master
second
```

```
git status
On branch master
...
```

Depending on the shell or terminal, Git can display additional information in the prompt, such as the current branch, whether all files are tracked, or if there are uncommitted changes. However, to check which branch you are on, you can always use the `git status` command or `git branch` without any parameters.

GIT MERGE

- ✖ A merge combines changes from one branch into another.
- ✖ **Typically, we merge into the main/master branch.**
- ✖ Example workflow:
 - ✖ Switch/Checkout main
 - ✖ Run git merge feature-branch
 - ✖ main now includes the changes from feature-branch

GIT MERGE

A merge creates a merge commit that keeps both branch histories visible. Useful when you want a complete history of how branches diverged and then rejoined.

Run from main

```
A---B---C---D (main)
      \
      E---F (feature)
```

```
A---B---C---D---M (main)
      \  /
      E---F
```

WORKING

with Branches

WORKING WITH BRANCHES

Branch inheritance:

- ✂ A newly created branch (other than main/master) inherits all files and commits that existed at the moment of its creation.
- ✂ In other words: it's a copy of the project's state at that time.

Files created inside a branch:

- ✂ New files committed inside a branch “live” only in that branch.
- ✂ The main branch (main/master) does not see these files unless a merge happens.

WORKING WITH BRANCHES

Merge command:

- ✂ The git merge <branch> command merges the given branch into the currently active branch.
- ✂ **Important:** the merge is always one-way – from the branch given as a parameter → into the branch you are on.

WHAT HAPPENS TO THE MERGED BRANCH?

- ✂ After a merge, the merged branch is not deleted automatically.
- ✂ Whether you remove it depends on team strategy and workflow:
 - ✂ Deleting keeps the repository clean and avoids clutter.
 - ✂ Keeping old branches may obscure the project and cause confusion.
- ✂ Remember: deleting a branch is **irreversible** if its changes are not merged.

WORKING WITH BRANCHES

Merge conflicts:

- ✂ A merge conflict happens when the same file was modified differently in two branches.
- ✂ Conflicts are very common in collaborative projects.
- ✂ Expect them – don't assume merging will always be automatic..

RESOLVING MERGE CONFLICTS

- ✖ Git will stop and inform you which files are in conflict.
- ✖ Inside the file you'll see conflict markers like:
- ✖ The developer must manually decide which parts to keep.
- ✖ After editing and saving, run:
- ✖ to finalize the merge.

```
<<<<<<< HEAD
your current branch content
=====
incoming branch content
>>>>>>> feature-branch
```

`git add <file>` and `git commit`

SUMMARY 1/3

Let's review what we have learned so far. We previously worked on creating new branches in Git and switching between them. One important observation is that files seem to be “hidden” when moving between branches, since each branch has its own version of the file system state.

- ✂ A newly created branch (other than main or master) inherits everything that existed at the moment it was created.
- ✂ Any new files added and committed in this branch “live” only in that branch. The main branch does not automatically have access to them.
- ✂ The merge command allows us to bring another branch into the currently active branch (never the other way around!).
- ✂ After merging, the absorbed branch is not automatically deleted.

SUMMARY 2/3

It is important to remember that merging cannot be **undone** easily, and the consequences are permanent. On the other hand, in large projects, a huge number of branches may appear to allow independent development of features. This branching helps with safety and organization, but leaving unsupported or abandoned branches can create confusion and reduce clarity in the codebase.

- ✂ Merge conflicts are very common. They occur when two branches contain different versions of the same file. Hoping for no conflicts is unrealistic.

SUMMARY 3/3

- ✂ When a conflict happens, Git will report it and show which files are affected. Inside the file, Git will mark the conflicting sections with `<<<<< HEAD, =====, and >>>>>>`
`branch_name` .
- ✂ At this point, the software engineer must manually resolve the conflict: decide which parts of the code remain and which should be removed. After making the necessary edits, the file must be saved, staged (git add), and committed.

In short, branches allow safe and parallel development, merging combines work from different lines of development, and conflicts are a natural part of collaboration that every developer must learn to resolve.

EXAMPLE OF THE MERGING PROCESS

The screenshot shows a code editor with two panes, 'Incoming' and 'Current', illustrating a merge conflict resolution process. The 'Incoming' pane shows a file 'test_confl.txt' with a conflict at line 2, where 'test4()' is being merged. The 'Current' pane shows the same file with 'test_1()' and 'test_2()' functions. The bottom status bar indicates '1 Conflict Remaining'.

```
test_confl.txt ! • Merging: test_confl.txt ! •
```

test_confl.txt

Incoming c32cf3a • refs/heads/second

```
1 // file that was created to show how works merging
2 int test4()
3 {
4     ;
5     printf("\n");
6     return 0;
7 }
8
```

Accept Incoming | Accept Combination (Incoming First) | Ignore

Current 49d557b • refs/heads/master

```
1 // file that was created to show how works merging
2 int test_1()
3 {
4     return 1;
5 }
6 int test_2()
7 {
8     return 2;
9 }
10 int test_3()
11 {
12     return 3;
13 }
14
```

Accept Current | Accept Combination (Current First) | Ignore

Result test_confl.txt

```
1 // file that was created to show how works merging
No Changes Accepted
```

1 Conflict Remaining

INTRODUCTION TO GIT DIFF

What is git diff?

- ✂ git diff is a command used to show changes between commits, branches, or your working directory and the index.
- ✂ **It does not change anything** — it only displays differences.
- ✂ Important note:
- ✂ The +++ and --- lines in the diff output do not indicate whether something was added or removed.
 - ✂ They simply represent the two versions being compared:
 - ✂ --- → the “old” version
 - ✂ +++ → the “new” version

INTRODUCTION TO GIT DIFF

Example:

✂ Here, the - and + at the start of lines indicate removal or addition. --- and +++ just label the files.

```
diff --git a/file.txt b/file.txt
--- a/file.txt
+++ b/file.txt
@@ -1,3 +1,3 @@
-Hello world
+Hello Git
```

INTRODUCTION TO GIT DIFF

Comparing staged changes: --staged (or --cached)

- ✂ By default, git diff compares your working directory with the index (staged area).
- ✂ To compare staged changes with the last commit:
- ✂ Shows changes that **are staged for the next commit**, i.e., tracked files that have been modified and added with git add.

```
git diff --staged
```

INTRODUCTION TO GIT DIFF

Comparing specific commits:

- ✂ You can compare changes between two commits using their commit IDs:
- ✂ Replace <commit1> and <commit2> with the **hashes** of the commits you want to compare.
- ✂ Example:
- ✂ Output shows **what changed from commit 3a5f1b2 to commit 9c7e8d0**.
- ✂ Hint: `git log --oneline`

```
git diff <commit1> <commit2>
```

```
git diff 3a5f1b2 9c7e8d0
```

INTRODUCTION TO GIT DIFF

Order of commit IDs matters:

- ✂ `git diff A B` $\neq$ `git diff B A`
- ✂ The first commit (A) is considered the “old” version.
- ✂ The second commit (B) is considered the “new” version.
- ✂ Lines starting with - were removed from A $\rightarrow$ B, lines starting with + were added in B compared to A.
- ✂ Example:

```
git diff A B # shows changes to get from A to B
git diff B A # shows changes to get from B to A (reversed)
```

SUMMARY - GIT DIFF

- ✖ git diff is a read-only comparison tool.
- ✖ +++ / --- do not indicate changes, only file versions.
- ✖ Use --staged to check what is staged for commit.
- ✖ Use commit IDs to compare specific commits.
- ✖ Order matters when comparing commits.
- ✖ git diff --staged or git diff --cached

INTRODUCTION TO GIT STASH

What is git stash?

- ✂ git stash is a command used to temporarily save changes in your working directory and index without committing them.
- ✂ It is useful when you want to switch branches or work on something else without losing your current changes.
- ✂ Think of it as a “clipboard” for your changes.
- ✂ Basic idea:

```
# Save current changes to stash  
git stash
```

```
# Apply stashed changes later  
git stash apply
```

INTRODUCTION TO GIT STASH

How it works?

- ✖ When you run git stash:
 - ✖ Changes in tracked files are saved to a new stash entry.
 - ✖ Working directory is reset to match HEAD (last commit).
- ✖ By default, unstaged changes are stashed.
- ✖ You can also include untracked files with -u (or --include-untracked):
- ✖ `git stash -u`

INTRODUCTION TO GIT STASH

Managing multiple stashes?

- ✚ Each stash is stored in a stack-like structure.
- ✚ Commands:

```
git stash list      # Show all stashes
git stash apply     # Apply the most recent stash
git stash apply stash@{2}  # Apply specific stash
git stash pop       # Apply and remove the most recent stash
git stash drop stash@{1}  # Delete specific stash
git stash clear     # Delete all stashes
```

INTRODUCTION TO GIT STASH

Important Note About the Stash Mechanism

The stash copies all changes from the branch without committing them into a single shared list.

- ✂ This means you can stash from one branch and apply it to another branch.
- ✂ Stashes are not independent per branch — there is one global stash stack.
- ✂ You need experience to handle stashes carefully, because applying or adding changes to the wrong branch can cause issues.

Without careful management, using git stash can create more problems than it solves. Avoid just doing `git add .` and committing from a different branch without checking your stashes first.

INTRODUCTION TO GIT STASH

Stash naming

- ⌘ You can add a message for clarity:
- ⌘ Helps to remember the purpose of each stash.

```
git stash save "WIP: fixing login bug"
```

INTRODUCTION TO GIT STASH

Stash and branches

- ✂ Stashes can be applied to any branch, not just the one they were created on.
- ✂ This makes them useful for:
 - ✂ Quick context switches
 - ✂ Experimenting without committing incomplete work
 - ✂ Moving work between branches

INTRODUCTION TO GIT STASH

Quick tips

- ⌘ git stash = save + clean working directory.
- ⌘ git stash pop = restore and remove from stash.
- ⌘ git stash apply = restore without removing.
- ⌘ Include untracked files: git stash -u.
- ⌘ Stashes are temporary storage, not a substitute for commits.

SUMMARY - INTRODUCTION TO GIT STASH

- ✂ Use stash when you need to pause your work without committing.
- ✂ Remember: stash is a stack → LIFO (last in, first out).
- ✂ Always check git stash list to avoid losing changes.

RENAMING FILES IN GIT – IMPORTANT NOTE

When working with Git, it's important to understand how file renaming is handled. Git does not automatically detect a rename as a single action. Instead, it treats it as:

- ✂ Deletion of the old file
- ✂ Creation of a new, untracked file

So, if you rename a file manually (e.g., from `oldName.txt` to `newName.txt`), Git will see `oldName.txt` as deleted and `newName.txt` as a new file.

- ✂ To properly reflect this change in Git, you should:
- ✂ Git doesn't track file names — it tracks content. Renaming a file is treated as removing one and adding another. Always stage both the deletion and the new file to keep your history clean and understandable.



WHAT IS A GIT BRANCH?

- ⚡ A branch in Git is like a separate line of development. It allows you to work on new features, bug fixes, or experiments without affecting the main codebase. The default branch is usually called main or master.
- ⚡ Branches help teams collaborate safely and efficiently by isolating changes until they're ready to be merged.
- ⚡ Think of branches as parallel timelines. You can develop safely in one branch, test your changes, and merge them back when everything works. This is a core concept in modern version control.

GIT BRANCH – CREATE A NEW BRANCH

- ✂ The command `git branch` shows a list of all branches in your repository. The currently active branch is marked with an asterisk (*).
- ✂ When working with a repository that has multiple branches, we can switch between them using two different commands. This is because modern versions of Git introduced standardized naming conventions, but the older commands were kept to ensure backward compatibility and to avoid forcing experienced users to relearn everything from scratch.

```
git branch new_branch
```

```
$ git switch second_branch
```



```
$ git checkout second_branch
```



GIT STATUS & GIT BRANCH

Depending on the shell or terminal, Git can display additional information in the prompt, such as the current branch, whether all files are tracked, or if there are uncommitted changes. However, to check which branch you are on, you can always use the git status command or git branch without any parameters.

```
$ git branch
```

```
* master
```

```
second
```



```
$ git status
```

```
On branch master
```

```
...
```



THANK

You

