











The 9 levels of

Claude Code

Lvl 1	Lvl 2	Lvl 3	Lvl 4	Lvl 5	Lvl 6	Lvl 7	Lvl 8	Lvl 9
								
Terminal	Memory	Commands	Skills	MCP	Subagents	Hooks	Headless	Routines





Lvl 1

@shazimbuidls

Terminal

Claude Code lives in your terminal and takes plain English

You describe the change you want. Claude reads your files, makes the edits and runs the tests – and asks first before anything risky.

use it for

- fix a bug
- add a feature
- run the tests

Claude Code Opus 4.8 · running tools

R Read `src/auth/session.ts` ✓ 96 lines

E Edit `src/auth/session.ts` · +12 -3 ✓ applied

\$ Bash `npm test -- session` ✓ 14 passed

Claude wants to run `npm run db:migrate`

✓ Yes

Yes, don't ask again

No, tell Claude what to do

Claude Code ~/taskflow

> refactor the billing flow @src/billing/checkout.ts @CLAUDE.md

✓ read CLAUDE.md – conventions, stack, naming

✓ read src/billing/checkout.ts (214 lines)

✓ read src/billing/stripe.ts (referenced import)

✓ loaded 3 files · ~38.4k tokens into context

context 38.4k / 1M

Lvl 2

@shazimbuid


Memory

CLAUDE.md — a file in your repo that Claude reads at the start of every session

You write your stack, naming and rules into CLAUDE.md once, and every session starts already knowing your project. No re-explaining.

use it for

- your coding style
- the file layout
- commands you reuse



Lvl 3

@shazimbuidls

Commands

slash commands are shortcuts you type with a / to run a set action

One keystroke triggers a set action – /clear wipes the chat, /compact shrinks the history, /context shows what fills the window.

use it for

- clear the context

- compact the chat


- make your own

 Claude Code / commands

/clear wipe the conversation

/compact summarise and compress the history

/context show what is filling the window



Lvl 4

@shazimbuids

Skills

a skill is a saved playbook Claude loads on demand for a repeat task

You package a repeatable workflow into a skill once, then call it by name – and Claude follows your exact steps every single time.

use it for

● review code

● write tests

● ship content

Claude Code / skills


`/carousel` topic in, 10 slides out – my system

`/review` spot bugs before I commit

`/ship` build, verify, deploy, announce

`/guide` turn a build into a lead magnet

`/invoice` draft the month's invoices



Lvl 5

@shazimbuides

MCP

MCP is the open standard that plugs Claude into your outside tools and data

Connect servers through MCP and Claude reaches your real tools – it reads your docs, queries your database or drives your browser without leaving the terminal.



Lvl 6

@shazimbuides

Subagents

a subagent is a second Claude that runs a task in its own context window


Hand a big job to a subagent and it works on the side — a long search or refactor runs in parallel while your main thread stays clean.

use it for

• deep research

• big refactors

• parallel work

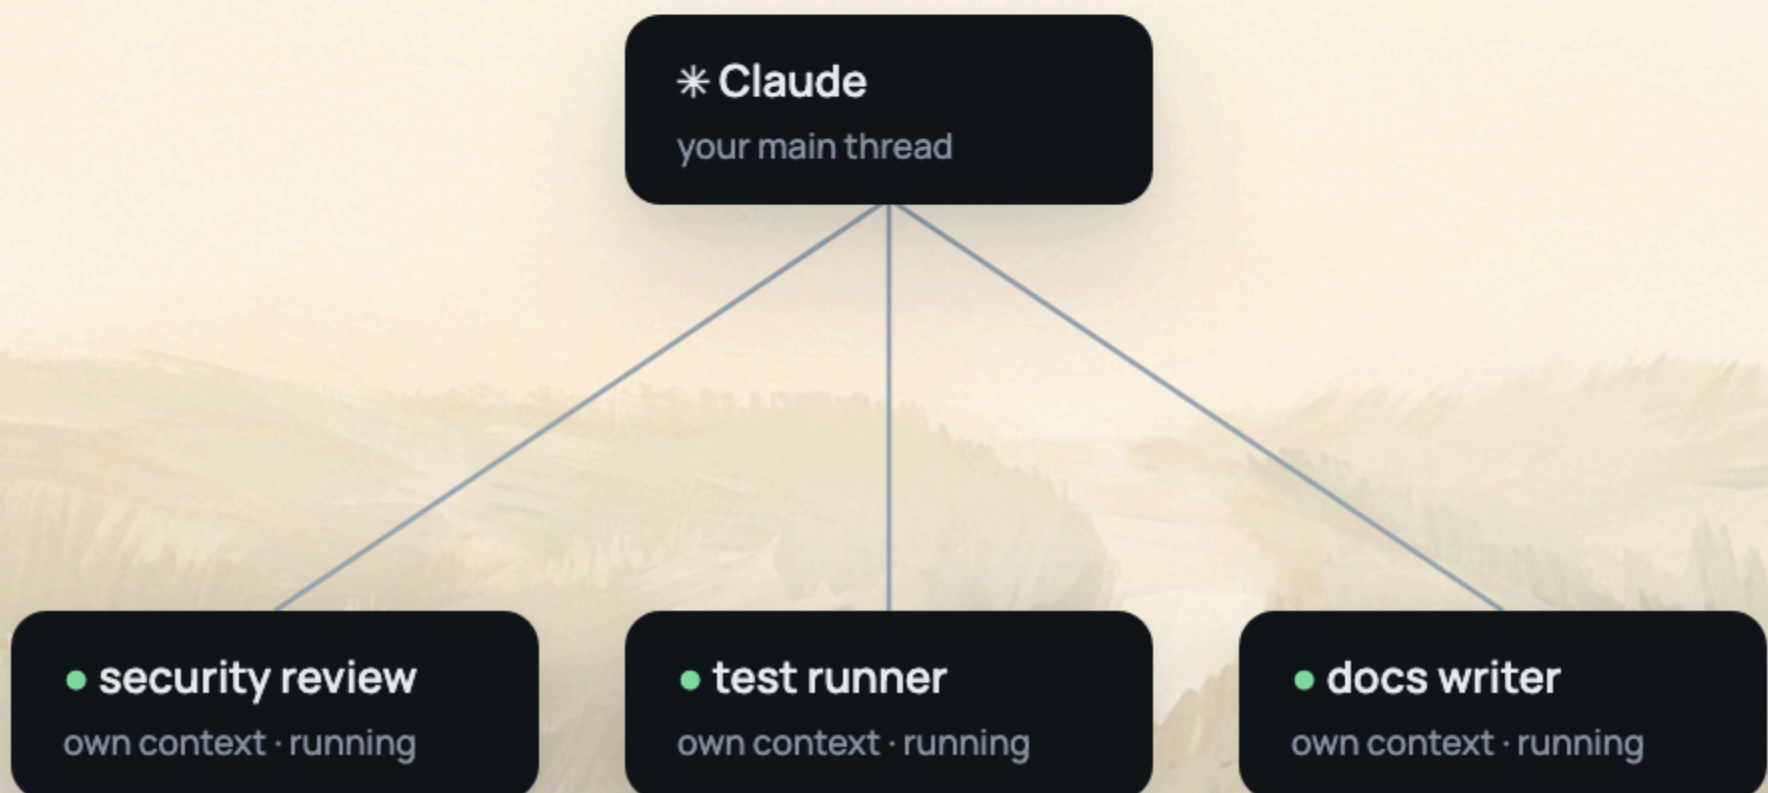

settings.json

```
{
  "hooks": {
    "events": [
      { "event": "session starts", "script": "load-context.sh" },
      { "event": "before a tool", "script": "guard.sh" },
      { "event": "claude stops", "script": "notify.sh" }
    ] ← on this event, run this script
  }
}
```

Lvl 7

@shazimbuidls

Hooks

a hook is a script Claude runs automatically on a chosen event

**You map an event to a script in settings.json —
load context when a session starts, guard risky
commands, get pinged when Claude stops.**

use it for

- load context

- block risky commands

- notify when done



Lvl 8

@shazimbuidls

Headless

headless mode runs Claude Code from a script with no chat window

Call `claude -p` inside CI or a cron job and it works with no chat open – reviewing every pull request and failing the build on a regression.

use it for

- review every pr

- nightly checks

- gate the build

● ● ●  Claude Code CI · pull request

```
$ claude -p 'review the diff, fail on regressions'
```

```
analysed 14 changed files
```

```
flagged one risky migration
```

```
check passed, comment posted
```



Lvl 9

@shazimbuidls

Routines

a routine is a Claude Code job that runs on a schedule in the cloud

Put a task on a schedule and Claude runs it on its own – triaging your inbox or checking the deploy every morning before you open your laptop.

use it for

- triage your inbox
- check the deploy
- daily summary

● ● ●  Claude Code / schedule

```
> /schedule morning triage · 6:00 am
```

```
✓ Mon ✓ Tue ✓ Wed ✓ Thu ✓ Fri
```

```
it triages the inbox before you wake up
```

Want the roadmap ?

Comment LEVELS and I'll DM you the 9-level roadmap – one build per level, the exact commands, and where founders should stop.

@shazimbuid