


Jenkins Task-2




Task Description:

Create a simple script file and push it to repo. Create a project in Jenkins connected to your GitHub repository. When a commit is made to your repo, automatically build must get triggered from Jenkins and the output must be shared to me via email.

Techstacks needs to be used :

- AWS EC2
- Github
- Jenkins

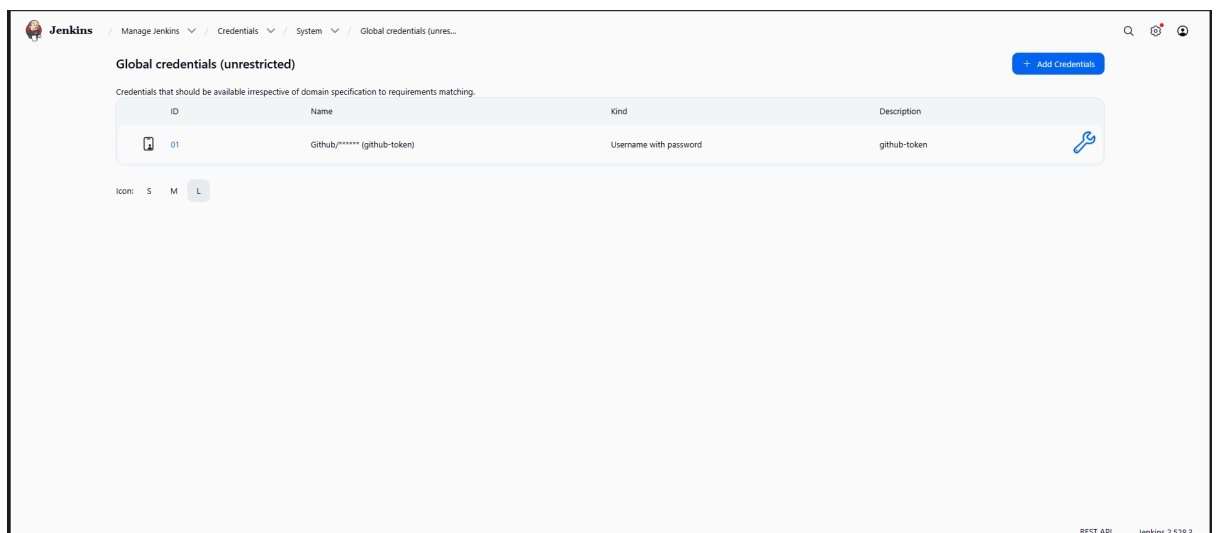

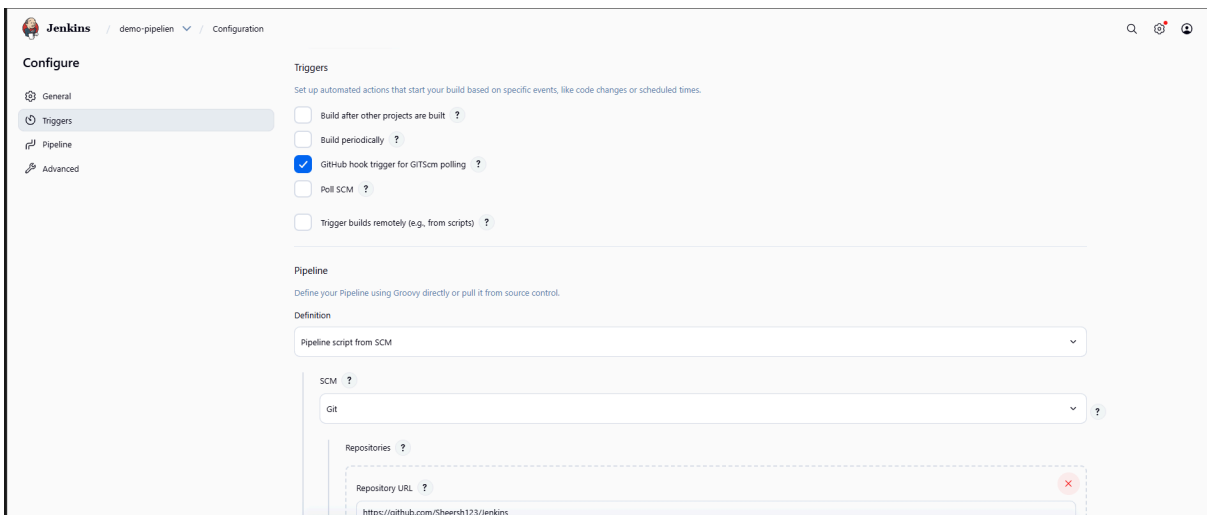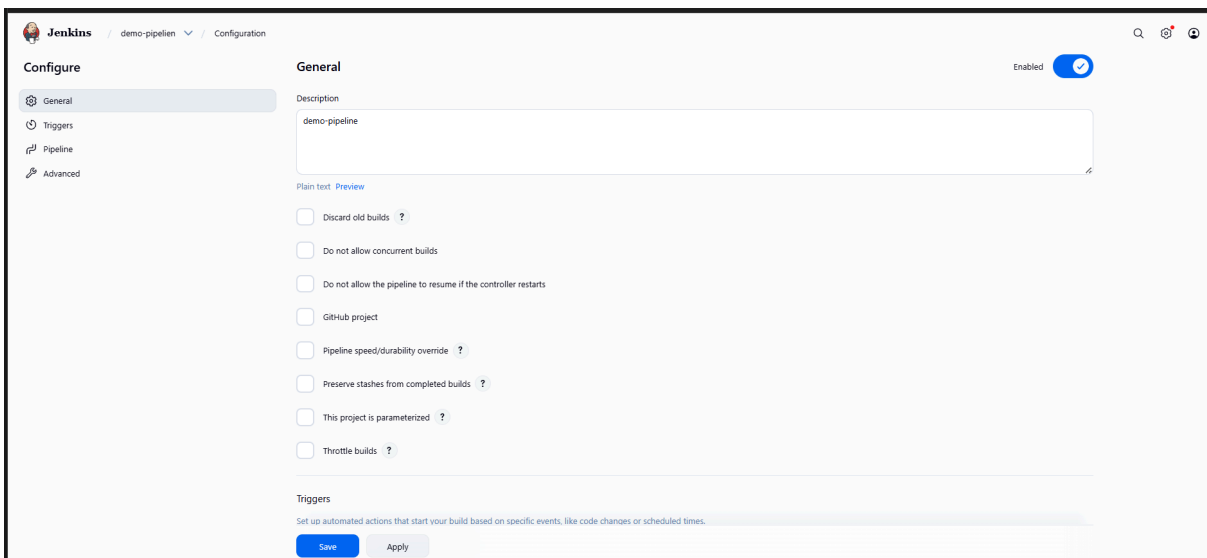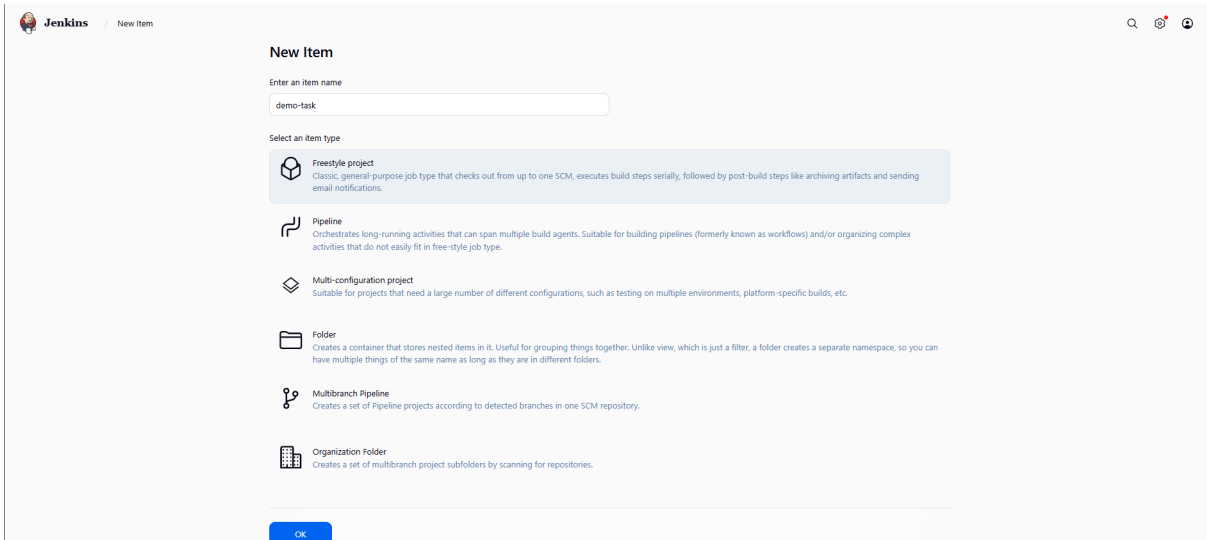

Jenkins

demo-pipeline

Configuration

Configure

General

Triggers

Pipeline

Advanced

Credentials ?

Github***** (github-token)

Advanced

+ Add Repository

Branches to build ?

Branch Specifier (blank for 'any') ?

*/main

+ Add Branch

Repository browser ?

(Auto)

Additional Behaviours

+ Add

Script Path ?

Jenkins/script.sh

Save

Apply

Jenkins

demo-pipeline

Configuration

Configure

General

Triggers

Pipeline

Advanced

+ Add Branch

Repository browser ?

(Auto)

Additional Behaviours

+ Add

Script Path ?

Jenkinsfile

☒ Lightweight checkout ?

[Pipeline Syntax](#)

Advanced

Advanced

Save

Apply

REST API Jenkins 2.528.3

E-mail Notification

SMTP server

smtp@gmail.com

Default user e-mail suffix ?

@gmail.com

Advanced

☒ Use SMTP Authentication ?

User Name

sheershinha08@gmail.com

Password

Concealed

☒ Use SSL ?

☐ Use TLS

SMTP Port ?

465

Reply-To Address

sheershinha08@gmail.com

Charset

UTF-8

```

script.sh
1  #!/usr/bin/env bash
2
3  str="hello world"
4  upper=""
5
6  for (( i=0; i<${#str}; i++ )); do
7      ch="${str:$i:1}"
8      upper+=$(printf "%s" "$ch" | tr '[:lower:]' '[:upper:]')
9  done
10
11 echo "$upper" > output.txt
12

```

```

Jenkinsfile
1  pipeline {
2      agent any
3
4      options {
5          timestamps()
6      }
7
8      stages {
9          stage('Checkout') {
10             steps {
11                 git branch: 'main', url: 'https://github.com/Sheersh123/Jenkins.git'
12             }
13         }
14
15         stage('Run Bash Script') {
16             steps {
17                 sh 'chmod +x script.sh'
18                 sh '''
19                     ./script.sh > output.txt
20                     echo "==== Script Output ====="
21                     cat output.txt
22                     echo "===== "
23                 '''
24             }
25         }
26     }
27
28     post {
29         always {
30             script {
31                 def output = fileExists('output.txt') ? readFile('output.txt') : 'output.txt not found'
32             }
33         }
34     }
35 }

```


Jenkins
demo-pipeline ▾ #7 ▾ Console Output

Status

<> Changes

Console Output

ESR Build Information

Delete build #7

Timings

Git Build Data

Pipeline Overview

Restart from Stage

Replay

Pipeline Steps

Workspaces

Previous Build

✓ Console Output

```

Started by user Sheersh Sinha
Obtained Jenkinsfile from git https://github.com/Sheersh123/jenkins
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in /var/lib/jenkins/workspace/demo-pipeline
[Pipeline] {
[Pipeline] stage
[Pipeline] | (declarative: Checkout SCM)
[Pipeline] checkout
The recommended git tool is: git
using credential 01
> git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/demo-pipeline/.git # timeout=10
Fetching changes from the remote Git repository
> git config remote.origin.url https://github.com/Sheersh123/jenkins # timeout=10
Fetching upstream changes from https://github.com/Sheersh123/jenkins
> git --version # timeout=10
> git --version # 'git version 2.43.0'
using GIT_ASKPASS to set credentials github-token
> git fetch --tags --force --progress -- https://github.com/Sheersh123/jenkins +refs/heads/*:refs/remotes/origin/* # timeout=10
> git rev-parse refs/remotes/origin/main:commit) # timeout=10
Checking out Revision ae26c1d20151f40b0bf1fb3286868733fe706 (refs/remotes/origin/main)
> git config core.sparsecheckout # timeout=10
> git checkout -f ae26c1d20151f40b0bf1fb3286868733fe706 # timeout=10
Commit message: "Modified-Jenkins-File"
> git rev-list --no-walk 54636ca1b16f4eac1bd94e0c9cf7d703db # timeout=10
[Pipeline] }
[Pipeline] // stage
[Pipeline] withEnv
[Pipeline] {
[Pipeline] timestamps
[Pipeline] {
[Pipeline] stage
[Pipeline] | (Checkout)
[Pipeline] git
13:28:42 The recommended git tool is: git
13:28:42 No credentials specified
13:28:42 > git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/demo-pipeline/.git # timeout=10
13:28:42 Fetching changes from the remote Git repository
13:28:42 > git config remote.origin.url https://github.com/Sheersh123/jenkins.git # timeout=10
13:28:42 Fetching upstream changes from https://github.com/Sheersh123/jenkins.git
13:28:42 > git --version # timeout=10
13:28:42 > git --version # 'git version 2.43.0'
13:28:42 > git fetch --tags --force --progress -- https://github.com/Sheersh123/jenkins.git +refs/heads/*:refs/remotes/origin/* # timeout=10

```

Timestamps [View as plain text ▾](#)

- ☒ System clock time
- ☒ Use browser timezone
- ☐ Elapsed time
- ☐ None