
Ops Copilot: what we have built

AI Gothenburg Ops Copilot · as-built report · 5 Oct 2026 · branch feat/triage · everything here is in the code and covered by the 13 offline tests, unless marked otherwise.

In one paragraph

The Copilot can already take one email and sort it: obvious Noise is caught by rules for free, everything else goes to a model (free Ling during development) that picks exactly one Category from an editable list and pulls out every Ask. It runs from the command line and every run is traced in LangSmith. The Person memory has started: it remembers a Person's Applications, the Decisions on them (and who made them) and their emails, keyed by email address. Everything else in the design (Briefs, Decision Requests, the email graph, the Daily Report) is still to come.

Where we are: seam 1 done, seam 2 under way

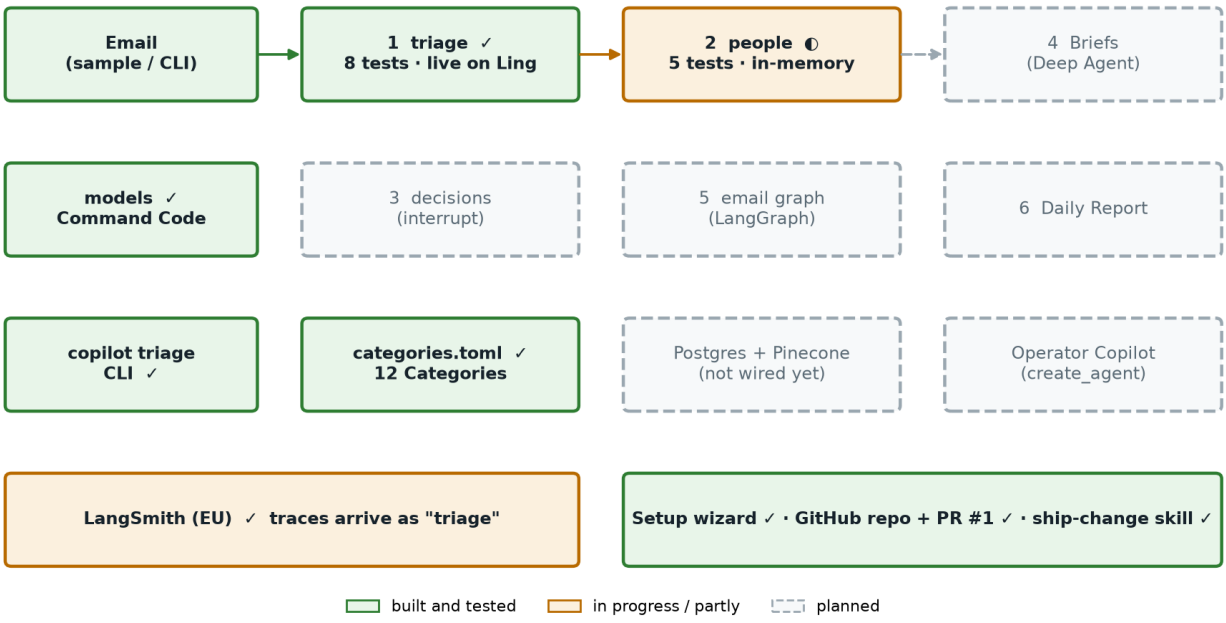


1. The files

File	Lines	What it is
`src/copilot/triage.py`	101	Seam 1. `triage(email, model) -> Triage`: Noise rules, model call, retry, Unsorted, automatic-Brief flag.
`src/copilot/categories.toml`	68	The editable list of 12 Categories, each with a description, an example and `brief = true/false`.
`src/copilot/people.py`	187	Seam 2 (in progress). `People.record(event)` and `People.recall(address) -> History`.
`src/copilot/models.py`	30	`chat_model(role, profile)`: every model through Command Code with one key.
`src/copilot/cli.py`	109	The `copilot triage` command, with 4 sample emails.
`evals/deterministic/test_triage.py`	138	8 offline tests for triage.
`evals/deterministic/test_people.py`	101	5 offline tests for people.
`scripts/setup-wizard.sh`	319	Walks through the accounts and keys (Command Code, LangSmith, Pinecone, Tavily, optional SMTP, GitHub secrets).
`CONTEXT.md, docs/`		Glossary (23 terms), 5 ADRs, design.md, research report + PDF.

2. Seam 1: triage (done)


triage(email, model) → Triage

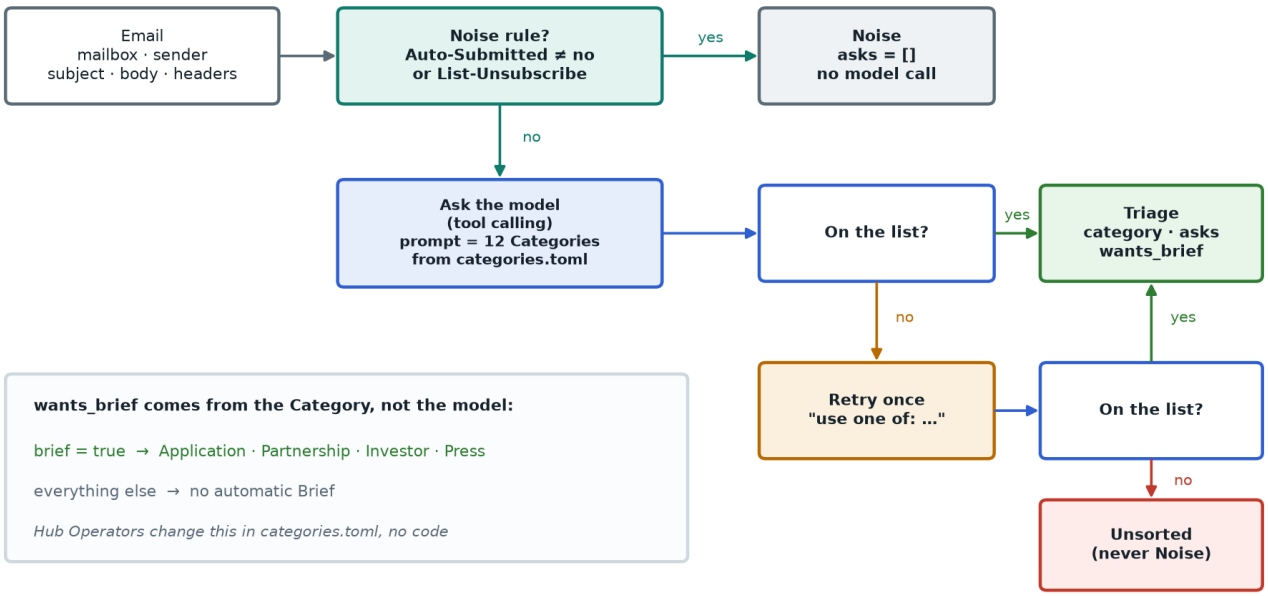

Three decisions you made are built into this flow: bulk mail is always Noise (even from partners); a Category off the list gets one retry and then becomes **Unsorted**, never Noise; and only Application, Partnership, Investor and Press emails get an automatic Brief.

3. Models: one key, three models


models.py: one key, three models, by role and profile

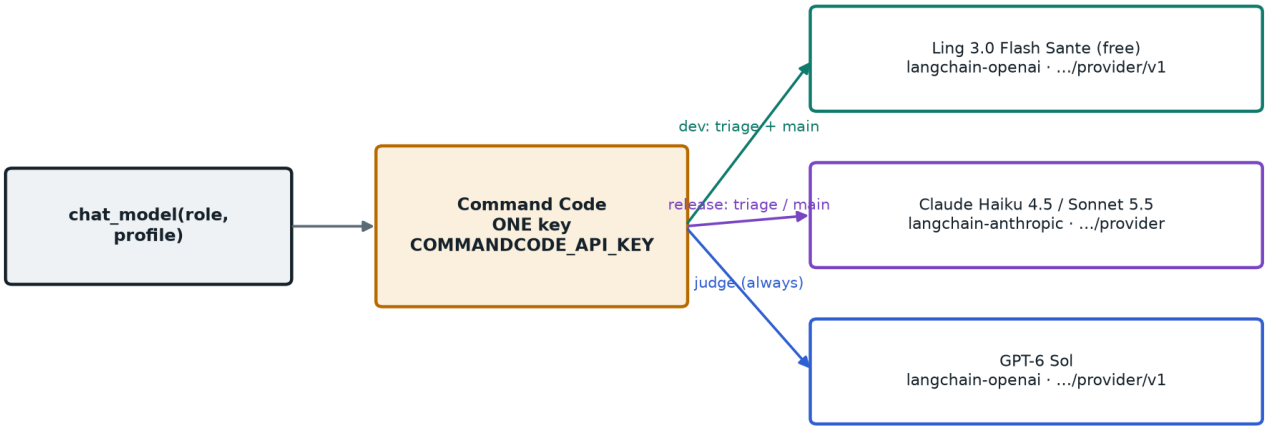

- **Why tool calling:** the live test showed Ling rejects JSON-schema output and JSON mode, but tool calling works. Claude supports it too, so triage always uses it.
- **Why two base URLs:** the Anthropic SDK adds `/v1/messages` itself, so Claude's base URL stops at `/provider`; OpenAI-style models use `/provider/v1`.
- **Judge never grades itself:** GPT-6 Sol judges both the Ling and the Claude runs.

4. Seam 2: people (in progress)

people: one Person per email address, with Applications, Decisions and Emails

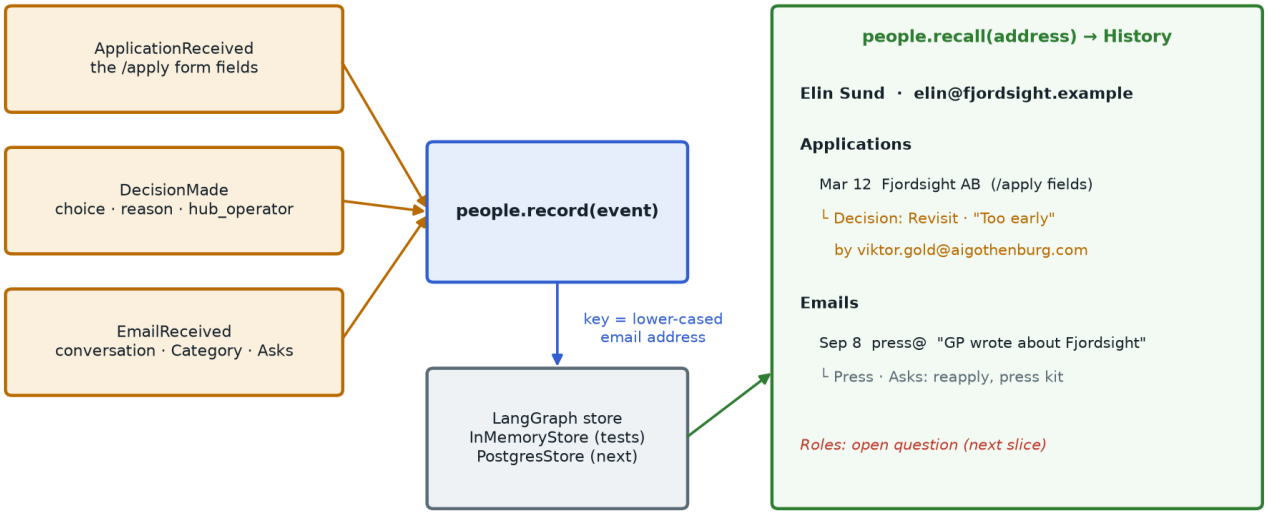

Tests use LangGraph's `InMemoryStore`, which has the same interface as the `PostgresStore` we will use for real, so the tests exercise the real code. A Decision for an Application the Person never sent is refused with `UnknownApplication` instead of being lost.

5. Running it


```
$ uv run copilot triage --sample 1
Email     Investor Night + podcast  (hello@aigothenburg.com)
Category  Investor
Brief     yes, automatic
Asks      Seat at Investor Night on Oct 14
          Intro to Fjordsight
          Guest on the podcast
Took      20.0s
```

• `uv run copilot triage --list` shows the samples; `--body "..."` triages your own text; `--profile release` uses Claude.

• Each run appears in LangSmith (EU instance, project `gbg-ops-copilot`) as a trace named **triage**, including any retry.

• Live results so far: English investor email → Investor with all 3 Asks; Swedish GP email → Press with both Asks; room booking → Member & hub; newsletter → Noise in 0.1 s with no model call.

6. The tests

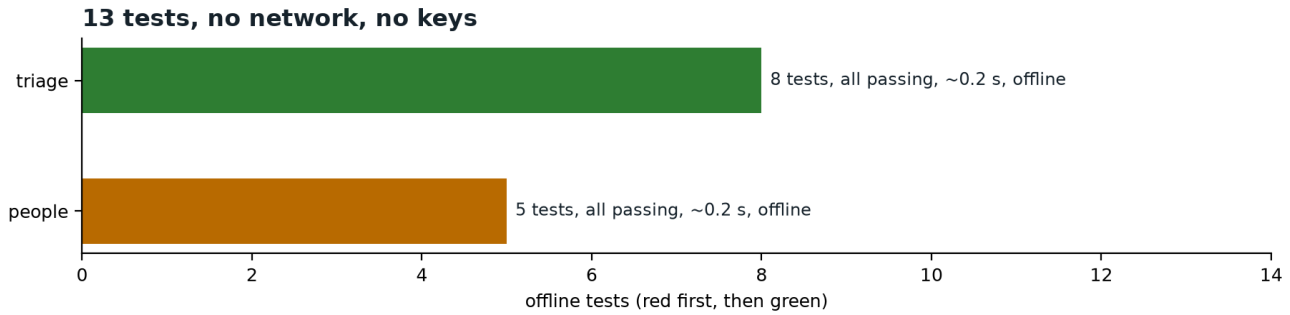

Module	Test (reads as a requirement)
triage	automatic reply is noise without asking the model
triage	bulk mail is noise without asking the model
triage	noise rules ignore header name case
triage	one email keeps one category and every ask
triage	category off the list gets one retry
triage	category off the list twice leaves the email unsorted
triage	investor email gets an automatic brief
triage	event proposal gets no automatic brief
people	later email from the same address finds the earlier application
people	address case does not split one person in two
people	a decision on an application is remembered with who made it
people	a decision on an unknown application is refused
people	emails join the person's history next to their application

The model is replaced by small fakes at the system boundary (`ScriptedModel`, `ModelMustNotBeCalled`). Everything else runs for real. Each behavior was written as a failing test first.

7. Tooling and repository

Piece	State
GitHub	Private repo ShehanDataEngieering/gbg-ops-copilot. PR #1 (project setup, docs, wizard) merged into main.
Branches	`chore/command-code-models` and `feat/triage`: the model switch, triage and people work are **not committed yet**.
Setup wizard	Run once. Command Code, LangSmith (EU), Pinecone and Tavily keys are in `.env` (git-ignored). Email sending skipped for now: Daily Report stays dry-run.
LangSmith	Fixed: the key is an EU key, so `LANGSMITH_ENDPOINT` now points to the EU instance (in .env and the GitHub variable).
ship-change skill	Installed for Claude Code, Codex, Pi and Hermes: branch, small commits, secret scan + tests before each commit, PR.

8. What is next

- **Open question:** how Roles are set. Recommended: only Applicant and Member automatically in v1 (they are certain); other Roles suggested later by the Brief researcher.
- **people:** Roles, then `similar()` with a Pinecone stand-in, then one integration test on real Postgres in Docker.
- **Seam 3, decisions:** `decisions.ask()` with LangGraph `interrupt()`, plus choosing the demo surface that replaces the archived Agent Inbox.
- **Seams 4–6:** the Brief researcher (Deep Agent, configured as the research recommends), the email graph, the Daily Report.
- **Housekeeping:** commit the two branches as PRs; update ADR 0005 so the Operator Copilot is `create_agent`.