

Problem Statement:

A real estate agent want to help to predict the house price for regions in USA.He gave us the dataset to work on to use Linear Regression modelCreate a Model that helps him to estimate of what the house would sell for

```
In [1]: import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
```

```
In [2]: df=pd.read_csv("uber.csv")
df
```

```
Out[2]:
```

	Unnamed: 0	key	fare_amount	pickup_datetime	pickup_longitude	pickup_latitude
0	24238194	2015-05-07 19:52:06.0000003	7.5	2015-05-07 19:52:06 UTC	-73.999817	40.738354
1	27835199	2009-07-17 20:04:56.0000002	7.7	2009-07-17 20:04:56 UTC	-73.994355	40.728225
2	44984355	2009-08-24 21:45:00.00000061	12.9	2009-08-24 21:45:00 UTC	-74.005043	40.740770
3	25894730	2009-06-26 08:22:21.0000001	5.3	2009-06-26 08:22:21 UTC	-73.976124	40.790844
4	17610152	2014-08-28 17:47:00.000000188	16.0	2014-08-28 17:47:00 UTC	-73.925023	40.744085
...
199995	42598914	2012-10-28 10:49:00.00000053	3.0	2012-10-28 10:49:00 UTC	-73.987042	40.739367
199996	16382965	2014-03-14 01:09:00.0000008	7.5	2014-03-14 01:09:00 UTC	-73.984722	40.736837
199997	27804658	2009-06-29 00:42:00.00000078	30.9	2009-06-29 00:42:00 UTC	-73.986017	40.756487
199998	20259894	2015-05-20 14:56:25.0000004	14.5	2015-05-20 14:56:25 UTC	-73.997124	40.725452
199999	11951496	2010-05-15 04:08:00.00000076	14.1	2010-05-15 04:08:00 UTC	-73.984395	40.720077

200000 rows × 9 columns



```
In [3]: df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 200000 entries, 0 to 199999
Data columns (total 9 columns):
#   Column                Non-Null Count  Dtype
---  -
0   Unnamed: 0            200000 non-null int64
1   key                   200000 non-null object
2   fare_amount           200000 non-null float64
3   pickup_datetime       200000 non-null object
4   pickup_longitude      200000 non-null float64
5   pickup_latitude       200000 non-null float64
6   dropoff_longitude     199999 non-null float64
7   dropoff_latitude      199999 non-null float64
8   passenger_count       200000 non-null int64
dtypes: float64(5), int64(2), object(2)
memory usage: 13.7+ MB
```

In [4]:

```
df.head()
```

Out[4]:

	Unnamed: 0	key	fare_amount	pickup_datetime	pickup_longitude	pickup_latitude	drop
0	24238194	2015-05-07 19:52:06.0000003	7.5	2015-05-07 19:52:06 UTC	-73.999817	40.738354	
1	27835199	2009-07-17 20:04:56.0000002	7.7	2009-07-17 20:04:56 UTC	-73.994355	40.728225	
2	44984355	2009-08-24 21:45:00.00000061	12.9	2009-08-24 21:45:00 UTC	-74.005043	40.740770	
3	25894730	2009-06-26 08:22:21.0000001	5.3	2009-06-26 08:22:21 UTC	-73.976124	40.790844	
4	17610152	2014-08-28 17:47:00.000000188	16.0	2014-08-28 17:47:00 UTC	-73.925023	40.744085	

Data cleaning and Pre-Processing

In [5]:

```
df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 200000 entries, 0 to 199999
Data columns (total 9 columns):
#   Column                Non-Null Count  Dtype
---  -
0   Unnamed: 0            200000 non-null int64
1   key                   200000 non-null object
2   fare_amount           200000 non-null float64
3   pickup_datetime       200000 non-null object
4   pickup_longitude      200000 non-null float64
5   pickup_latitude       200000 non-null float64
6   dropoff_longitude     199999 non-null float64
7   dropoff_latitude      199999 non-null float64
8   passenger_count       200000 non-null int64
dtypes: float64(5), int64(2), object(2)
memory usage: 13.7+ MB
```

In [6]:

df.describe()

Out[6]:

	Unnamed: 0	fare_amount	pickup_longitude	pickup_latitude	dropoff_longitude	dropoff_latitude
count	2.000000e+05	200000.000000	200000.000000	200000.000000	199999.000000	199999.000000
mean	2.771250e+07	11.359955	-72.527638	39.935885	-72.525292	39.923800
std	1.601382e+07	9.901776	11.437787	7.720539	13.117408	6.794800
min	1.000000e+00	-52.000000	-1340.648410	-74.015515	-3356.666300	-881.985500
25%	1.382535e+07	6.000000	-73.992065	40.734796	-73.991407	40.733800
50%	2.774550e+07	8.500000	-73.981823	40.752592	-73.980093	40.753000
75%	4.155530e+07	12.500000	-73.967154	40.767158	-73.963658	40.768000
max	5.542357e+07	499.000000	57.418457	1644.421482	1153.572603	872.697600

In [7]:

a= df.dropna(axis='columns')
a

Out[7]:

	Unnamed: 0	key	fare_amount	pickup_datetime	pickup_longitude	pickup_latitude
0	24238194	2015-05-07 19:52:06.0000003	7.5	2015-05-07 19:52:06 UTC	-73.999817	40.738354
1	27835199	2009-07-17 20:04:56.0000002	7.7	2009-07-17 20:04:56 UTC	-73.994355	40.728225
2	44984355	2009-08-24 21:45:00.00000061	12.9	2009-08-24 21:45:00 UTC	-74.005043	40.740770
3	25894730	2009-06-26 08:22:21.0000001	5.3	2009-06-26 08:22:21 UTC	-73.976124	40.790844
4	17610152	2014-08-28 17:47:00.000000188	16.0	2014-08-28 17:47:00 UTC	-73.925023	40.744085
...
199995	42598914	2012-10-28 10:49:00.00000053	3.0	2012-10-28 10:49:00 UTC	-73.987042	40.739367
199996	16382965	2014-03-14 01:09:00.0000008	7.5	2014-03-14 01:09:00 UTC	-73.984722	40.736837
199997	27804658	2009-06-29 00:42:00.00000078	30.9	2009-06-29 00:42:00 UTC	-73.986017	40.756487
199998	20259894	2015-05-20 14:56:25.0000004	14.5	2015-05-20 14:56:25 UTC	-73.997124	40.725452
199999	11951496	2010-05-15 04:08:00.00000076	14.1	2010-05-15 04:08:00 UTC	-73.984395	40.720077

200000 rows × 7 columns


```
In [8]: a.columns
```

```
Out[8]: Index(['Unnamed: 0', 'key', 'fare_amount', 'pickup_datetime',
              'pickup_longitude', 'pickup_latitude', 'passenger_count'],
              dtype='object')
```

EDA and VISUALIZATION

```
In [9]: b = a.head(200)
        sns.pairplot(b)
```


```
Out[9]: <seaborn.axisgrid.PairGrid at 0x256396afe50>
```

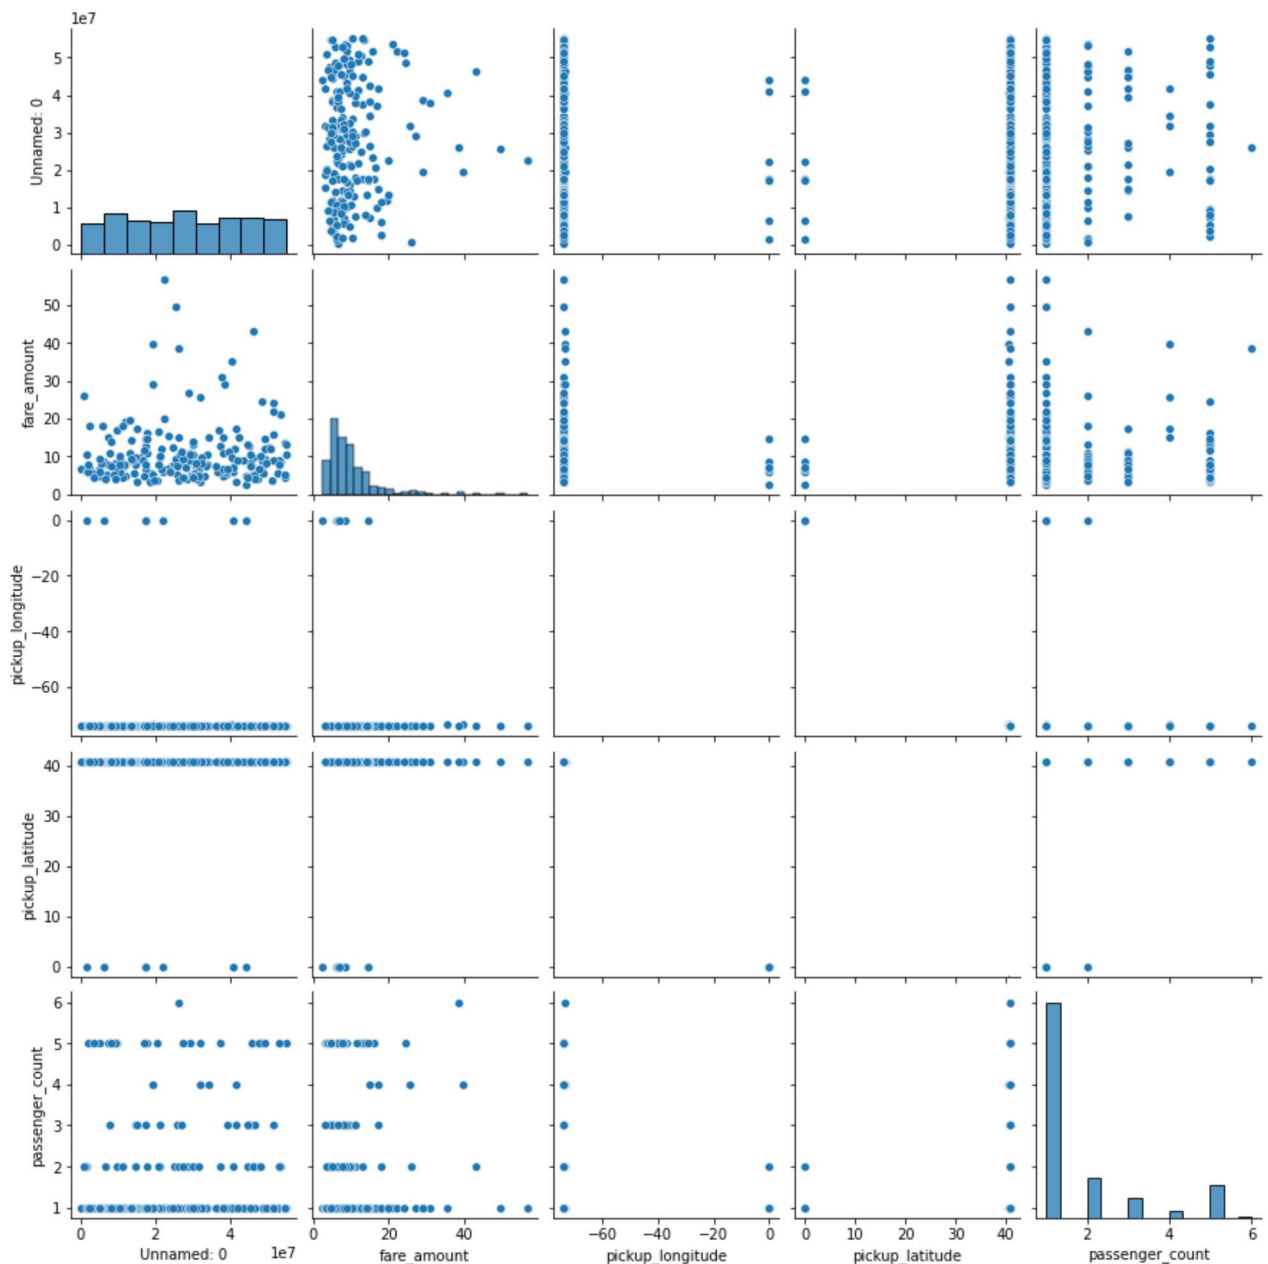

```
In [10]: sns.distplot(b['pickup_latitude'])
```

C:\ProgramData\Anaconda3\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).
warnings.warn(msg, FutureWarning)

```
Out[10]: <AxesSubplot:xlabel='pickup_latitude', ylabel='Density'>
```

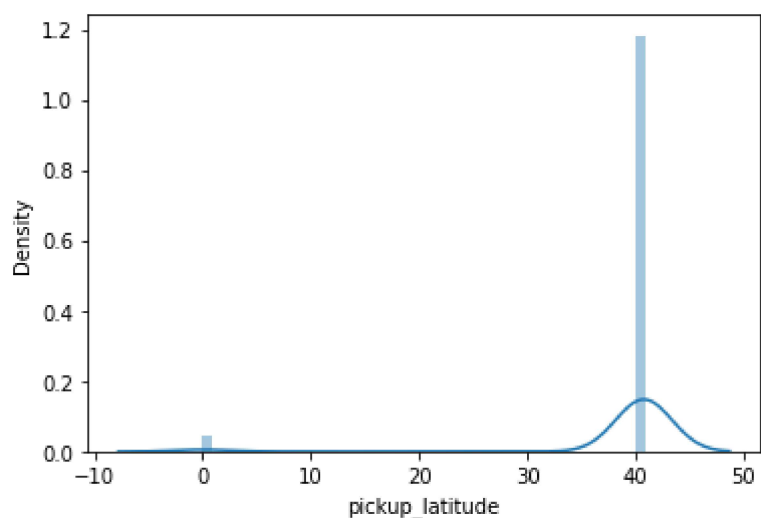


```
In [11]: df1=df[['key', 'fare_amount', 'pickup_datetime',  
               'pickup_longitude', 'pickup_latitude', 'passenger_count']]
```

Plot Using Heat Map

```
In [12]: sns.heatmap(df1.corr())
```

```
Out[12]: <AxesSubplot:>
```

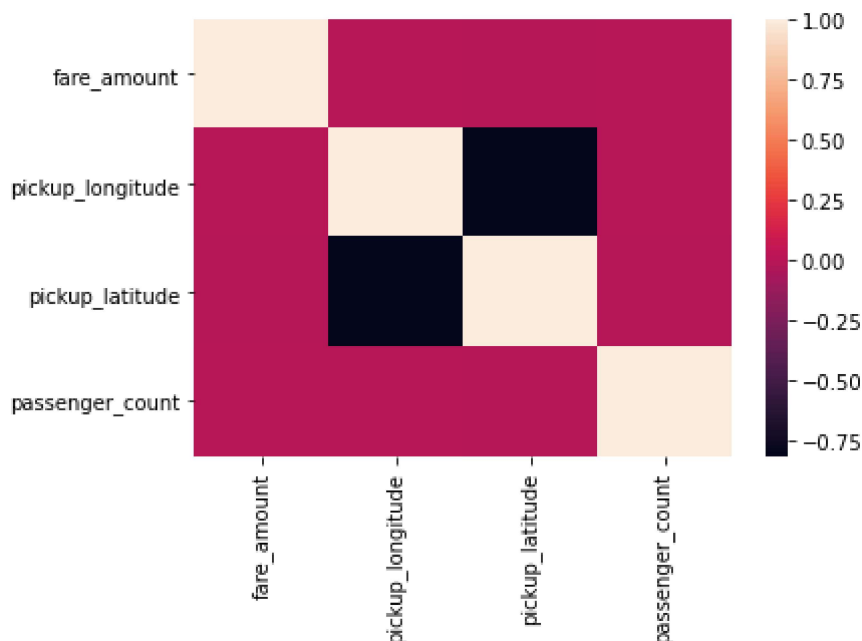

To Train The Model-Model Building

we are going to train Linera Regression Model;We need to split out data into two variables x and y where x is independent variable(input) and y is dependent on x(output) we could ignore address column as it required for our model

```
In [13]: x=df1[['pickup_longitude', 'pickup_latitude' ]]
        y=df1['fare_amount']
```

To Split my dataset into training and test data

```
In [14]: from sklearn.model_selection import train_test_split
        x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.3)
```

```
In [15]: from sklearn.linear_model import LinearRegression
        lr= LinearRegression()
        lr.fit(x_train,y_train)
```

```
Out[15]: LinearRegression()
```

```
In [16]: lr.intercept_
```

```
Out[16]: 12.094332009131614
```


```
In [17]: coeff = pd.DataFrame(lr.coef_,x.columns,columns=['Co-efficient'])
        coeff
```

```
Out[17]:
```

	Co-efficient
pickup_longitude	0.010544
pickup_latitude	0.000168

```
In [18]: prediction = lr.predict(x_test)
        plt.scatter(y_test,prediction)
```

```
Out[18]: <matplotlib.collections.PathCollection at 0x2564a93bb50>
```

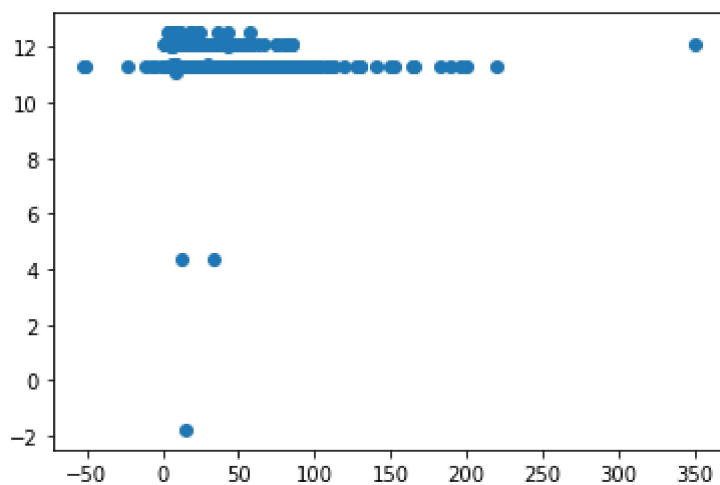

```
In [19]: lr.score(x_test,y_test)
```

```
Out[19]: -2.5966418308875916e-05
```

```
In [20]: from sklearn.linear_model import Ridge,Lasso
```

```
In [21]: rr=Ridge(alpha=10)
rr.fit(x_train,y_train)
rr.score(x_test,y_test)
rr.score(x_train,y_train)
```

```
Out[21]: 0.0001381899916349516
```

```
In [22]: rr.score(x_test,y_test)
```

```
Out[22]: -2.5966357898754566e-05
```

```
In [23]: la = Lasso(alpha=10)
la.fit(x_train,y_train)
```

```
Out[23]: Lasso(alpha=10)
```

```
In [24]: la.score(x_test,y_test)
```

```
Out[24]: -6.156030023007908e-05
```