

Problem Statement

A real estate agent want help to predict the house price for regions in USA.He gave us the dataset to work on to use linear regression model.Create a model that helps him to estimate of what the house would sell for

Import libraries


```
In [1]: import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
```

```
In [2]: # To import dataset
df=pd.read_csv('BreastCancer csv')
df
```

Out[2]:

	id	diagnosis	radius_mean	texture_mean	perimeter_mean	area_mean	smoothness_
0	842302	M	17.99	10.38	122.80	1001.0	0.
1	842517	M	20.57	17.77	132.90	1326.0	0.
2	84300903	M	19.69	21.25	130.00	1203.0	0.
3	84348301	M	11.42	20.38	77.58	386.1	0.
4	84358402	M	20.29	14.34	135.10	1297.0	0.
...
564	926424	M	21.56	22.39	142.00	1479.0	0.
565	926682	M	20.13	28.25	131.20	1261.0	0.
566	926954	M	16.60	28.08	108.30	858.1	0.
567	927241	M	20.60	29.33	140.10	1265.0	0.
568	92751	B	7.76	24.54	47.92	181.0	0.

569 rows × 33 columns




```
In [3]: # To display top 10 rows  
df.head(10)
```

Out[3]:

	id	diagnosis	radius_mean	texture_mean	perimeter_mean	area_mean	smoothness_m
0	842302	M	17.99	10.38	122.80	1001.0	0.11
1	842517	M	20.57	17.77	132.90	1326.0	0.08
2	84300903	M	19.69	21.25	130.00	1203.0	0.10
3	84348301	M	11.42	20.38	77.58	386.1	0.14
4	84358402	M	20.29	14.34	135.10	1297.0	0.10
5	843786	M	12.45	15.70	82.57	477.1	0.12
6	844359	M	18.25	19.98	119.60	1040.0	0.09
7	84458202	M	13.71	20.83	90.20	577.9	0.11
8	844981	M	13.00	21.82	87.50	519.8	0.12
9	84501001	M	12.46	24.04	83.97	475.9	0.11

10 rows × 33 columns



Data Cleaning and Pre-Processing

In [4]: df.info()

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 569 entries, 0 to 568
Data columns (total 33 columns):
#   Column                                Non-Null Count  Dtype
---  -
0   id                                     569 non-null    int64
1   diagnosis                             569 non-null    object
2   radius_mean                           569 non-null    float64
3   texture_mean                           569 non-null    float64
4   perimeter_mean                         569 non-null    float64
5   area_mean                             569 non-null    float64
6   smoothness_mean                       569 non-null    float64
7   compactness_mean                      569 non-null    float64
8   concavity_mean                        569 non-null    float64
9   concave points_mean                   569 non-null    float64
10  symmetry_mean                         569 non-null    float64
11  fractal_dimension_mean                 569 non-null    float64
12  radius_se                             569 non-null    float64
13  texture_se                             569 non-null    float64
14  perimeter_se                           569 non-null    float64
15  area_se                               569 non-null    float64
16  smoothness_se                         569 non-null    float64
17  compactness_se                        569 non-null    float64
18  concavity_se                          569 non-null    float64
19  concave points_se                     569 non-null    float64
20  symmetry_se                           569 non-null    float64
21  fractal_dimension_se                   569 non-null    float64
22  radius_worst                          569 non-null    float64
23  texture_worst                         569 non-null    float64
24  perimeter_worst                       569 non-null    float64
25  area_worst                            569 non-null    float64
26  smoothness_worst                      569 non-null    float64
27  compactness_worst                     569 non-null    float64
28  concavity_worst                       569 non-null    float64
29  concave points_worst                  569 non-null    float64
30  symmetry_worst                        569 non-null    float64
31  fractal_dimension_worst               569 non-null    float64
32  Unnamed: 32                           0 non-null      float64
dtypes: float64(31), int64(1), object(1)
memory usage: 146.8+ KB
```

In [5]: `df.describe()`

Out[5]:

	id	radius_mean	texture_mean	perimeter_mean	area_mean	smoothness_mean
count	5.690000e+02	569.000000	569.000000	569.000000	569.000000	569.000000
mean	3.037183e+07	14.127292	19.289649	91.969033	654.889104	0.096360
std	1.250206e+08	3.524049	4.301036	24.298981	351.914129	0.014006
min	8.670000e+03	6.981000	9.710000	43.790000	143.500000	0.052630
25%	8.692180e+05	11.700000	16.170000	75.170000	420.300000	0.086370
50%	9.060240e+05	13.370000	18.840000	86.240000	551.100000	0.095870
75%	8.813129e+06	15.780000	21.800000	104.100000	782.700000	0.105300
max	9.113205e+08	28.110000	39.280000	188.500000	2501.000000	0.163400

8 rows × 32 columns



In [6]: `df.columns`

Out[6]: Index(['id', 'diagnosis', 'radius_mean', 'texture_mean', 'perimeter_mean', 'area_mean', 'smoothness_mean', 'compactness_mean', 'concavity_mean', 'concave points_mean', 'symmetry_mean', 'fractal_dimension_mean', 'radius_se', 'texture_se', 'perimeter_se', 'area_se', 'smoothness_se', 'compactness_se', 'concavity_se', 'concave points_se', 'symmetry_se', 'fractal_dimension_se', 'radius_worst', 'texture_worst', 'perimeter_worst', 'area_worst', 'smoothness_worst', 'compactness_worst', 'concavity_worst', 'concave points_worst', 'symmetry_worst', 'fractal_dimension_worst', 'Unnamed: 32'], dtype='object')


In [7]: `a = df.dropna(axis='columns')`
`a.columns`

Out[7]: Index(['id', 'diagnosis', 'radius_mean', 'texture_mean', 'perimeter_mean', 'area_mean', 'smoothness_mean', 'compactness_mean', 'concavity_mean', 'concave points_mean', 'symmetry_mean', 'fractal_dimension_mean', 'radius_se', 'texture_se', 'perimeter_se', 'area_se', 'smoothness_se', 'compactness_se', 'concavity_se', 'concave points_se', 'symmetry_se', 'fractal_dimension_se', 'radius_worst', 'texture_worst', 'perimeter_worst', 'area_worst', 'smoothness_worst', 'compactness_worst', 'concavity_worst', 'concave points_worst', 'symmetry_worst', 'fractal_dimension_worst'], dtype='object')

EDA and Visualization

```
In [8]: sns.pairplot(a[['id', 'diagnosis', 'radius_mean', 'texture_mean', 'perimeter_mean',  
                      'area_mean']])
```

Out[8]: <seaborn.axisgrid.PairGrid at 0x234b9857be0>

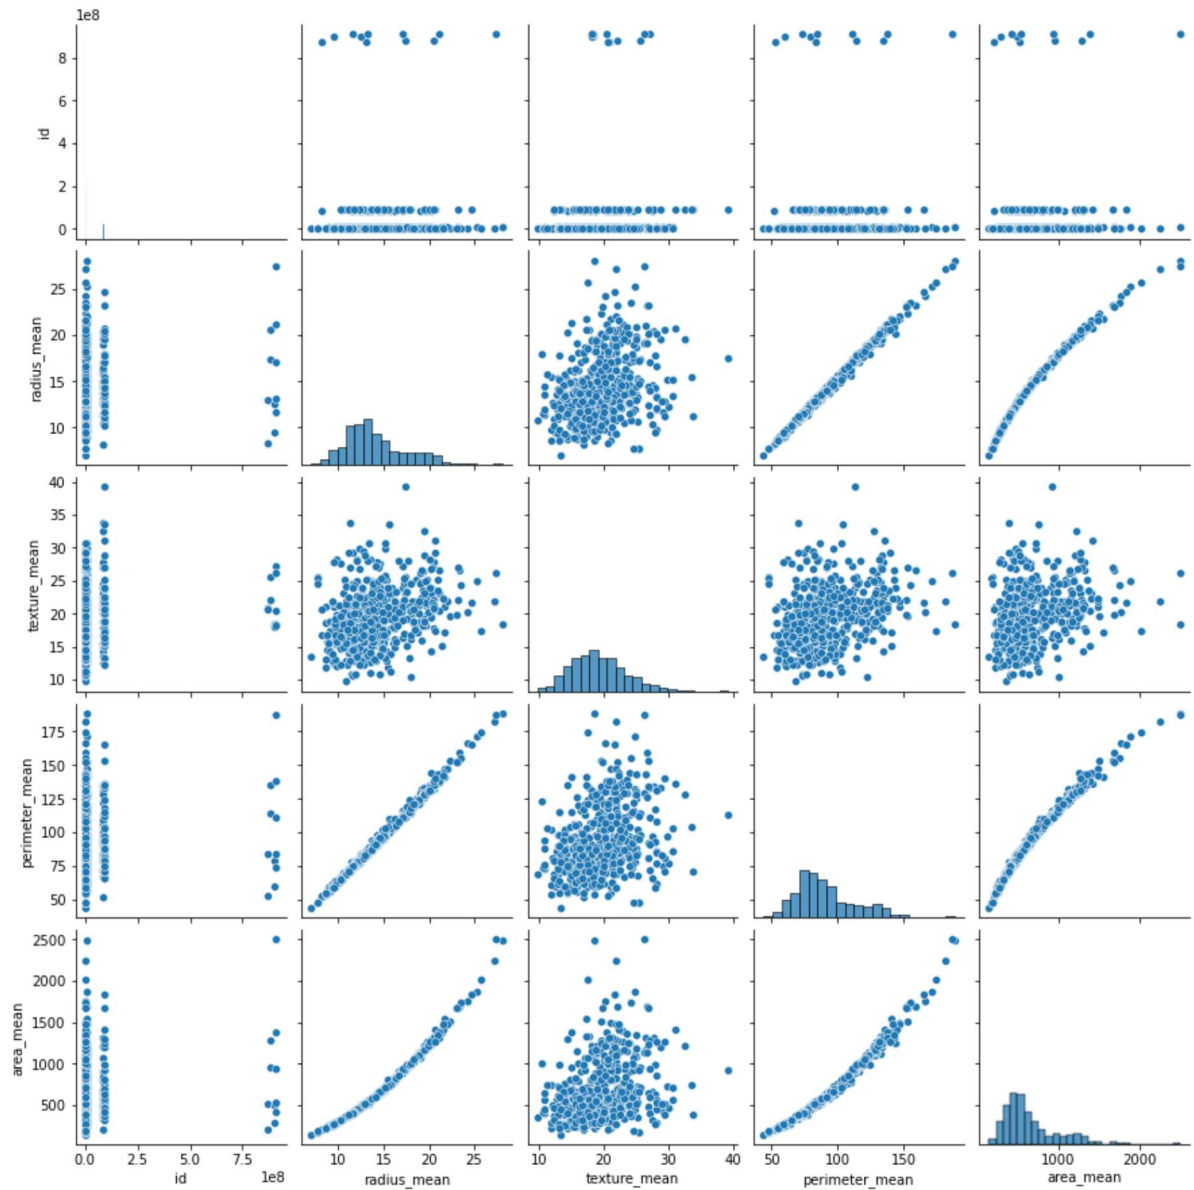


```
In [9]: sns.distplot(a['area_mean'])
```

C:\ProgramData\Anaconda3\lib\site-packages\seaborn\distributions.py:2557: FutureWarning: `distplot` is a deprecated function and will be removed in a future version. Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

```
warnings.warn(msg, FutureWarning)
```


```
Out[9]: <AxesSubplot:xlabel='area_mean', ylabel='Density'>
```

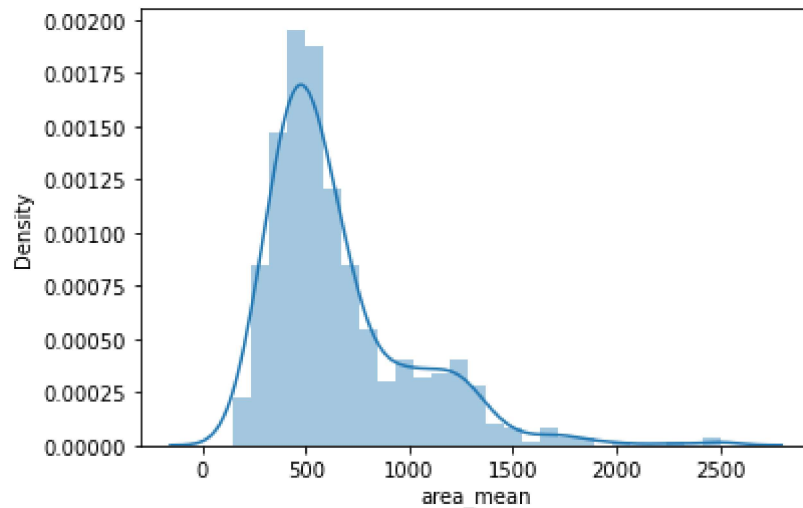

```
In [10]: a1=a[['radius_mean', 'texture_mean', 'perimeter_mean',
               'area_mean', 'smoothness_mean', 'compactness_mean', 'concavity_mean',
               'concave points_mean', 'symmetry_mean', 'fractal_dimension_mean',
               'radius_se', 'texture_se', 'perimeter_se', 'area_se', 'smoothness_se',
               'compactness_se', 'concavity_se', 'concave points_se', 'symmetry_se',
               'fractal_dimension_se', 'radius_worst', 'texture_worst',
               'perimeter_worst', 'area_worst', 'smoothness_worst',
               'compactness_worst', 'concavity_worst', 'concave points_worst',
               'symmetry_worst', 'fractal_dimension_worst']]
```

```
In [11]: sns.heatmap(a1.corr())
```

```
Out[11]: <AxesSubplot:>
```

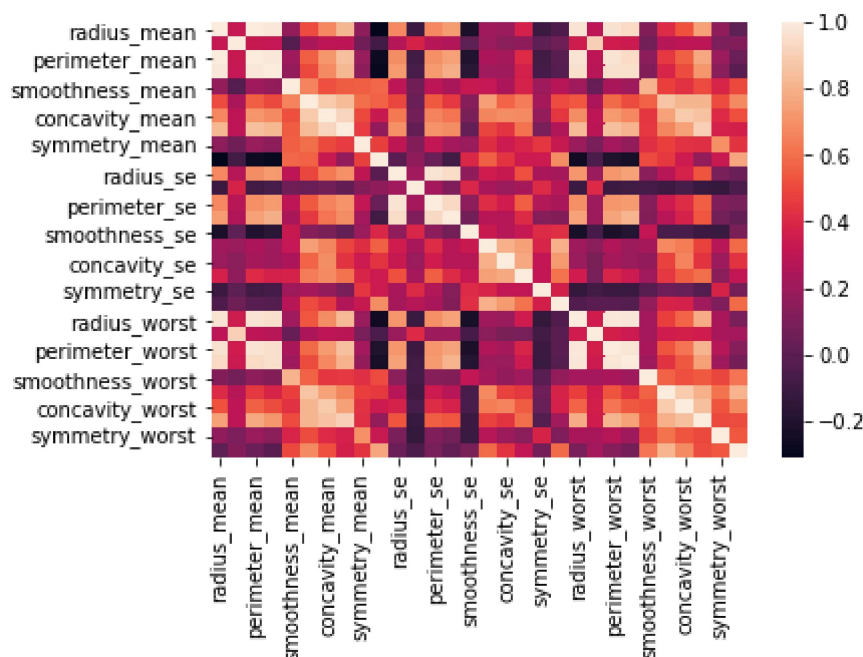

To Train the Model - Model Building

We are going to train Linear Regression model; We need to split out data into two variables x and y where x is independent variable (input) and y is dependent on x (output). We could ignore address column as it is not required for our model.

```
In [12]: x=a1[['radius_mean', 'texture_mean', 'perimeter_mean',
               'area_mean', 'smoothness_mean', 'compactness_mean', 'concavity_mean',
               'concave points_mean', 'symmetry_mean', 'fractal_dimension_mean',
               'radius_se', 'texture_se', 'perimeter_se', 'area_se', 'smoothness_se',
               'compactness_se', 'concavity_se', 'concave points_se', 'symmetry_se',
               'fractal_dimension_se', 'radius_worst', 'texture_worst',
               'perimeter_worst', 'area_worst', 'smoothness_worst',
               'compactness_worst', 'concavity_worst', 'concave points_worst',
               'symmetry_worst', 'fractal_dimension_worst']]
y=a1['area_mean']
```

To split my dataset into training and test data

```
In [13]: from sklearn.model_selection import train_test_split

x_train,x_test,y_train,y_test = train_test_split(x,y,test_size=0.3)
```

```
In [14]: from sklearn.linear_model import LinearRegression  
  
         lr=LinearRegression()  
         lr.fit(x_train,y_train)
```

Out[14]: LinearRegression()

```
In [15]: print(lr.intercept_)  
  
1.9326762412674725e-12
```




```
In [16]: coeff=pd.DataFrame(lr.coef_,x.columns,columns=['Co-efficient'])
coeff
```

Out[16]:

	Co-efficient
radius_mean	-1.111010e-13
texture_mean	5.306341e-15
perimeter_mean	-1.816753e-14
area_mean	1.000000e+00
smoothness_mean	-5.716927e-13
compactness_mean	6.413951e-13
concavity_mean	-4.733854e-13
concave points_mean	6.252828e-13
symmetry_mean	-1.065097e-13
fractal_dimension_mean	6.947211e-14
radius_se	-1.412823e-13
texture_se	1.272528e-14
perimeter_se	3.216552e-15
area_se	-2.898994e-16
smoothness_se	2.852380e-12
compactness_se	7.239947e-14
concavity_se	-4.045974e-13
concave points_se	2.605362e-12
symmetry_se	-1.879099e-13
fractal_dimension_se	1.266911e-12
radius_worst	2.967128e-14
texture_worst	-6.956090e-16
perimeter_worst	9.041644e-15
area_worst	-8.582562e-16
smoothness_worst	1.438409e-13
compactness_worst	-7.496123e-14
concavity_worst	6.977567e-14
concave points_worst	-2.265943e-13
symmetry_worst	1.026778e-13
fractal_dimension_worst	-1.892617e-13

```
In [17]: prediction=lr.predict(x_test)
plt.scatter(y_test,prediction)
```

Out[17]: <matplotlib.collections.PathCollection at 0x234bce2cbe0>

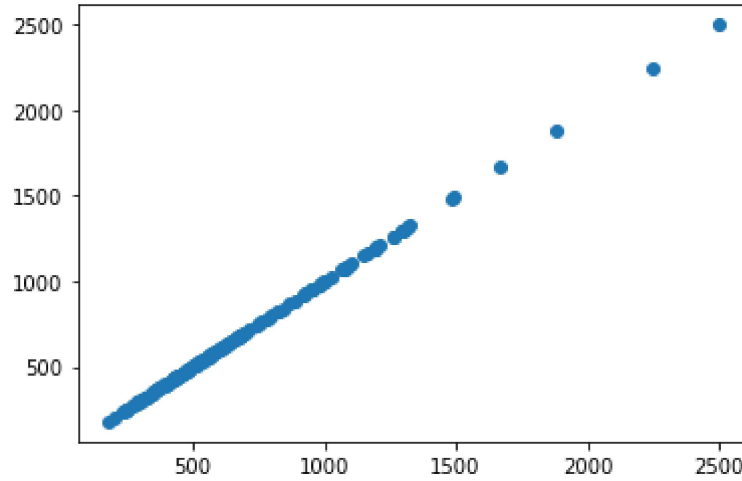

```
In [18]: print(lr.score(x_test,y_test))
```

1.0

```
In [ ]:
```