

Khulna University of Engineering & Technology
 Department of Computer Science and Engineering
CSE 4112: Machine Learning Laboratory

DATASET REPORT

What Shapes Student CGPA? A Bilingual Survey Dataset of Study Habits, Well-being and CGPA Groups of 920 Engineering Students in Bangladesh

Group No.	[__]	Dataset Version	v1.0 / 15 September 2026
Students	2107020 Sheikh Md. Galib Mahim; 2107030 Md. Eftakar Jaman Arfan; 2107007 Asif Jawad; 2107008 Rakibul Islam; 2107012 Md Enam E Elahi; 2107014 Al Mubtasim Preom	Repository	https://github.com/SheikhGalib/CGPA-does-matter-dataset-ml-lab

(a) Framework illustrating the practical application of the data

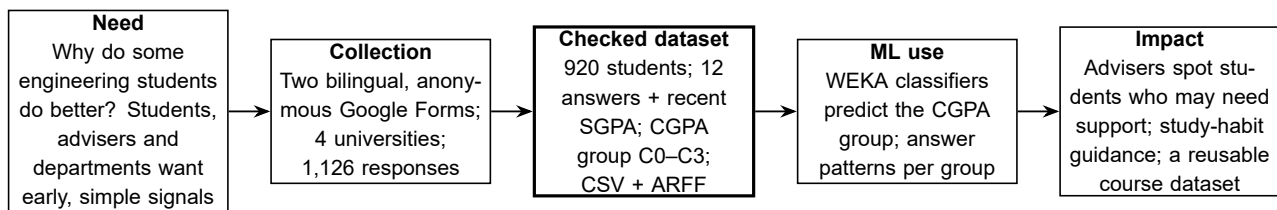


Figure 1(a). Practical application of the dataset. Intended users: academic advisers, department heads and students. Practical outcome: simple, explainable signals about which students may need academic support.

(b) Technical pipeline of the ML method using the dataset

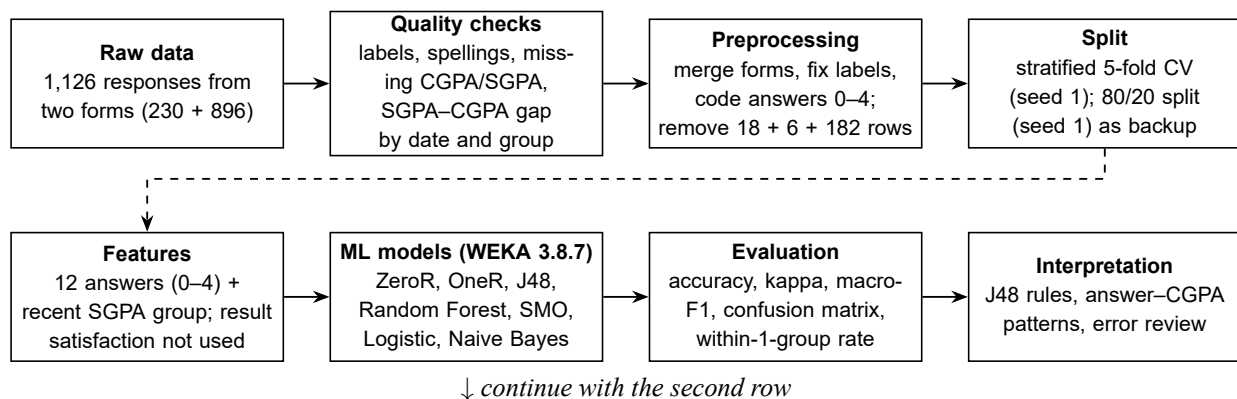


Figure 1(b). Technical pipeline followed in the course project. All cleaning is rule-based and fixed before any model is trained, so no statistic is learned from a test fold. Every row is a different anonymous student, so no student can appear in both a training and a test fold.

1. Dataset Article Information

Dataset/report title	What Shapes Student CGPA? A Bilingual Survey Dataset of Study Habits, Well-being and CGPA Groups of 920 Engineering Students in Bangladesh
Group and students	Group [__]: 2107020 Sheikh Md. Galib Mahim; 2107030 Md. Eftakar Jaman Arfan; 2107007 Asif Jawad; 2107008 Rakibul Islam; 2107012 Md Enam E Elahi; 2107014 Al Mubtasim Preom
Affiliation	Department of CSE, KUET, Khulna-9203, Bangladesh
Corresponding student	Sheikh Md. Galib Mahim, 2107020, [institutional e-mail]
Keywords	educational data mining; engineering students; CGPA; study habits; survey data quality; careless responses; WEKA; ordinal classification
Dataset version	v1.0; released 15 September 2026
Repository / persistent ID	GitHub: https://github.com/SheikhGalib/CGPA-does-matter-dataset-ml-lab ; no DOI assigned yet
License	CC BY 4.0 (proposed for the anonymised, processed files)
Related article / source	None (primary data collected by the group)

2. Abstract

We built this dataset to see which everyday student habits and circumstances go together with better or worse cumulative grades (CGPA) among engineering students in Bangladesh. We collected it with two anonymous, bilingual (English and Bangla) Google Forms. The first form reached students of BUET, BRAC University and CUET (230 responses, 22 August to 3 September 2026). The second reached KUET students (896 responses, 31 July to 13 August 2026). Both forms asked the same core questions: department, semester, the SGPA of the last semester, the current CGPA as a range, and fifteen five-option questions about attendance, self-study time, study style, how clear lectures were, sleep, stress, outside commitments, phone distraction, living place, family support, routine, and satisfaction with admission, career path and result. We merged the two forms into one schema, removed the Bangla part of each answer, fixed 110 department spellings, and turned both grade formats into four CGPA groups (C0: below 3.20, C1: 3.20–3.49, C2: 3.50–3.74, C3: 3.75 and above). A data check compared each student’s recent SGPA group with their CGPA group. It found one batch of KUET answers, sent on 6–7 August, where the two were often far apart. We removed the 182 answers from that batch whose groups were two or three steps apart. The released version has 920 rows (KUET 690, BUET 104, BRAC 101, CUET 25) with 12 coded answers, the recent SGPA group and the CGPA group, in CSV and WEKA ARFF formats. It also includes the raw exports, a data dictionary, answer codes, the list of removed rows and scripts that rebuild every file. The data can be reused for teaching classification, for studying survey data quality, and for comparing student habits across universities.

3. Dataset Specifications Table

Item	Required information
Subject / domain	Education (higher education, educational data mining)
Specific subject area	Self-reported study habits, well-being, support and CGPA groups of undergraduate engineering students in Bangladesh
Type of data	Tabular survey data; raw (two Google Forms exports) and processed (cleaned, coded, checked)
File formats	CSV (UTF-8), ARFF (WEKA), JSON (summary numbers), Markdown and PDF (documentation), PNG (figures); all open formats
Unit of observation	One row = one anonymous form response from one student
Data collection / source	Primary collection through two online questionnaires (Google Forms), shared in university student groups
Instrument / software	Google Forms (bilingual questions, single-choice answers); Python 3.14.5 (pandas 3.0.5, NumPy 2.5.2, SciPy 1.18.1, matplotlib 3.11.1) for cleaning; WEKA 3.8.7 for modelling
Data source location	Bangladesh: KUET (Khulna), BUET (Dhaka), BRAC University (Dhaka), CUET (Chattogram); online, self-completed
Collection period	31 July 2026 – 3 September 2026 (KUET form: 31 Jul – 13 Aug; multi-university form: 22 Aug – 3 Sep)
Dataset size	Raw: 1,126 responses (22 + 21 columns). Clean: 1,108 rows. Released ML file: 920 rows, 14 attributes (12 coded answers, recent SGPA group, CGPA group); 4 classes; about 32 KB (CSV)
Target / labels	cgpa_band: C0 below 3.20 (182), C1 3.20–3.49 (284), C2 3.50–3.74 (264), C3 3.75 and above (190); self-reported by each student
Accessibility	https://github.com/SheikhGalib/CGPA-does-matter-dataset-ml-lab , folders raw-data/ and cleaned-dataset/ours/final/
License / reuse terms	CC BY 4.0 (proposed). Anonymous data; no names, roll numbers or e-mail addresses. Do not try to re-identify respondents

4. Value of the Data

- **Why it is valuable.** It is a real, recent sample of 1,126 engineering students from four Bangladeshi universities. It links everyday habits (attendance, study time, sleep, stress, phone use, outside work) with CGPA groups, and every cleaning and removal step is documented and can be reproduced.
- **Who can reuse it.** Machine learning and data mining courses (a small, balanced four-class problem that runs in WEKA), education researchers, student-welfare offices and academic advisers.
- **What tasks it supports.** Multi-class and ordinal classification of CGPA or SGPA groups; feature association studies; decision-rule mining; clustering of student profiles; and data-quality studies, such as finding careless survey answers by comparing linked questions.
- **How it can be extended.** The same questionnaire can be re-run at other universities or in later semesters and added directly, because answers are stored with fixed codes. The per-question tables make it easy to compare with public datasets such as the UCI Student Performance data [4].
- **A worked data-quality case.** The dataset shows, with evidence, how one batch of rushed answers can hide real patterns. Accuracy of the same models rose from about 46% to 55% after the check (Section 10.7).

5. Background and Practical Motivation

Engineering programmes in Bangladesh are demanding, and a low CGPA can limit scholarships, higher study and jobs. Teachers and advisers usually learn about a struggling student only after results are published. Students also receive a lot of advice (“attend every class”, “sleep more”, “stay off your phone”) without local evidence of how these habits relate to grades in their own programmes.

Most public student-performance datasets come from other countries or other levels of education: Portuguese secondary schools [4], a Portuguese polytechnic’s administrative records [5], a Cypriot university survey of 145 students [6], or learning-management-system logs [7]. Recent Bangladeshi work looks at school-level SSC/HSC results or school course grades [2], [3]. We found no open, documented dataset that links study behaviour to CGPA for engineering undergraduates across several Bangladeshi universities.

Our group therefore designed a short, anonymous questionnaire and collected responses at KUET, BUET, BRAC University and CUET. The practical aim, shown in Figure 1(a), is to give advisers and students simple signals: which answers appear more often in the lower or higher CGPA groups, and how well a small set of answers can place a student in a CGPA group. A second aim came from the data itself. While modelling, we noticed that many students’ recent SGPA and CGPA were far apart. We traced this to one batch of submissions, so the dataset also records how survey answer quality was checked. We are not trying to prove what causes a high CGPA. The data is observational and self-reported, and we describe it that way throughout.

6. Data Acquisition / Experimental Design, Materials and Methods

All data are **primary data** collected by the group. No external or secondary dataset was merged into the released files.

6.1 Data source and sampling strategy

Population. Undergraduate students of engineering universities in Bangladesh who were enrolled in 2026.

Sampling method. We used convenience sampling with self-selection. Form links were shared in class and department messenger groups and passed on by students. At KUET the form was shared across departments and semesters. Semester-7 students (the group’s own cohort) responded most, which gives 675 of the 872 KUET rows that have a real SGPA. The multi-university form was shared through contacts at BUET, BRAC University and CUET.

Inclusion criteria. The respondent is a current undergraduate student and submitted the form.

Exclusion criteria. We removed a response when (i) there was no usable CGPA answer (18 rows); (ii) there was no real recent-SGPA answer (6 rows); or (iii) it came from the 6–7 August KUET semester-7 batch and its SGPA and CGPA groups were two or three steps apart (182 rows). Section 8 gives the reason for each rule.

Sample size. No target size was fixed in advance. We collected as many responses as possible within the course timeline. With four almost balanced classes and 13 inputs, 920 rows give about 230 students per class, enough for 5-fold cross-validation with 184 test students in each fold.

6.2 Collection setting, period and location

Students filled in the forms online, on their own phones or computers, at a time they chose. No incentive was offered. Table 1 and Figure 1 show the two collection windows. The KUET form ran from 31 July to 13 August 2026. Most of its answers arrived on 5–7 August (99, 326 and 132 per day) and 9–10 August (100 and 160). The multi-university form ran from 22 August to 3 September 2026. The group members listed on Page 1 designed

the forms, shared the links and exported the answers.

Table 1. The two source forms and how many rows each contributes at each stage.

Form	Universities	Collection window	Cols	Raw	Clean	Final
A: University Student Performance Analysis Form	BUET, BRAC, CUET	22 Aug 2026 – 03 Sep 2026	22	230	230	230
B: Student Performance Analysis Form (KUET)	KUET	31 Jul 2026 – 13 Aug 2026	21	896	878	690
Total	4 universities	31 Jul – 03 Sep 2026	–	1,126	1,108	920

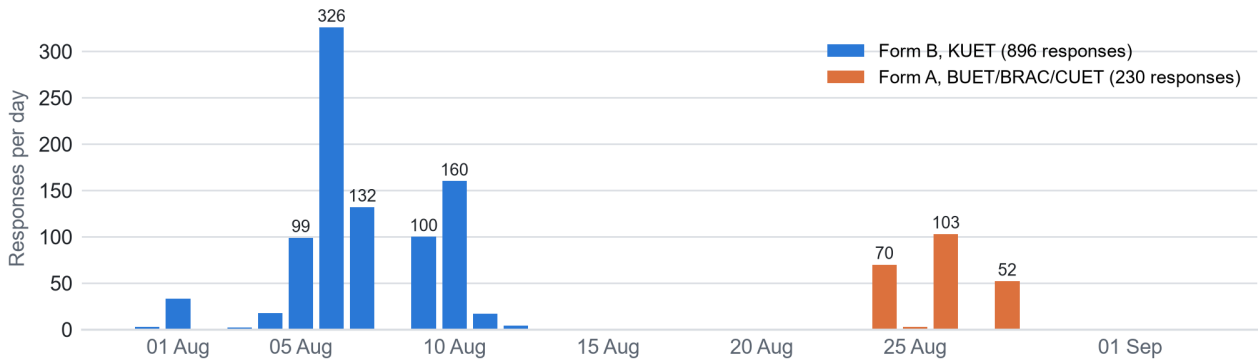


Figure 1. Raw responses received per day. Blue: KUET form (Form B). Orange: multi-university form (Form A). The KUET peak on 6 August is the batch examined in Section 9.

6.3 Instruments, hardware, software and versions

- **Questionnaire.** Two Google Forms written by the group: “University Student Performance Analysis Form” (Form A, 22 columns) and “Student Performance Analysis Form” (Form B, KUET, 21 columns). Every question is shown in English with a Bangla translation (Figures 2–4). All behaviour questions are single choice with five ordered options. The questions were written for this project and are not copied from a published scale.
- **Export.** Google Forms “Download responses (.csv)”, saved unchanged in raw-data/.
- **Cleaning and statistics.** Python 3.14.5 with pandas 3.0.5, NumPy 2.5.2, SciPy 1.18.1 and matplotlib 3.11.1. Scripts: notebooks/02_merged_cleaning_eda_modeling.ipynb (merge and clean), notebooks/final_weka_results.py (data check, final files, WEKA runs) and report/build_report_assets.py (tables and figures in this report).
- **Modelling.** WEKA 3.8.7 [8], run from the command line with its bundled Java runtime and also checked in the WEKA Explorer (docs/FINAL_WEKA_STEPS.md).

Screenshots of the Google Form and the response sheet. Figures 2–4 show the actual Google Form the students filled in, and Figure 5 shows the Google Sheets response sheet exported from it before any cleaning.

6.4 Variables, measurements and metadata

Each response records the following. Section 7.2 and Appendix A define every field.

- **Context:** university (Form A only; Form B is all KUET), department (free text), current semester.
- **Grades (self-reported ranges):** SGPA of the most recently completed semester; CGPA. Form A offered six ranges (Below, 3.0+, 3.2+, 3.5+, 3.75+, 3.9+). Form B offered four ranges or let students type a number.
- **Twelve behaviour and situation questions used as model inputs,** each with five ordered answers coded 0 (lowest) to 4 (highest): desired department match, attendance, weekly self-study, study style, topic clarity

University Student Performance Analysis Form

This questionnaire collects behavioral, demographic, and socioeconomic indicators to understand factors affecting academic performance. This survey is completely anonymous; no names, roll numbers, or exact income figures are collected.
(শিক্ষাগত ফলাফলের ওপর প্রভাব বিস্তারকারী বিষয়গুলো বোঝার লক্ষ্যে এই প্রশ্নমালার মাধ্যমে আচরণগত, জনমিত্তিক এবং আর্থ-সামাজিক সূচকসমূহ সংগ্রহ করা হচ্ছে। এই জরিপটি সম্পূর্ণ বেনামী, এতে কোনো নাম, রোল নম্বর বা আয়ের সুনির্দিষ্ট পরিমাপ সংগ্রহ করা হয় না।)

আপনার উন্নতি সেত করার জন্য [Google-এ সাইন-ইন করুন](#)। [আরও জানুন](#)

* প্রয়োজনীয় প্রশ্ন নির্দেশ করে

What is the name your university?
(তোমার বিশ্ববিদ্যালয়ের নাম কি?)

আপনার উত্তর

(a) Form heading, anonymity statement and first question

Did you get into your desired subject or department?
(তুমি কি তোমার পছন্দের সাজেস্ট/ডিপার্টমেন্টে ভর্তি হতে পেরেছো?)

☐ Yes, exactly what I wanted
☐ Close to what I wanted
☐ Somewhat different
☐ Mostly different
☐ Not at all what I wanted

How much time did tuition, a job, club activities or other responsibilities take each week?
(টিউশন, চাকরি, ক্লাবের কার্যক্রম বা অন্যান্য দায়িত্বে প্রতি সপ্তাহে তোমার কতটা সময় ব্যয় হচ্ছে?)

☐ None
☐ 1-5 hrs
☐ 6-10 hrs
☐ 11-15 hrs
☐ More than 15 hrs

How often did your phone, gaming, social media, or entertainment steal your planned study time?
(তোমার ফোন, গেমিং, সোশ্যাল মিডিয়া বা বিনোদন কত ঘন ঘন তোমার পরিকল্পিত পড়াশোনার সময় নষ্ট করেছে?)

☐ Never
☐ Rarely
☐ Sometimes
☐ Often
☐ Almost every day

When academic life became difficult, how much support did you receive from family or close friends?
(শিক্ষাজীবনের কঠিন সময়ে পরিবার থেকে তুমি কতটুকু সাহায্য পেতে?)

☐ No support
☐ Very little support
☐ Some support
☐ Good support
☐ Strong support

(b) Desired department, phone distraction, outside commitments and family support questions

Figure 2. Screenshots of the Google Form (University Student Performance Analysis Form). Every question is shown in English and Bangla; answers are single choice.

How often were you actually present in class? *
(তোমার ক্লাসে উপস্থিতি কেমন ছিল?)

- ☐ Less than 40%
☐ 40-59%
☐ 60-74%
☐ 75-89%
☐ 90% or more

Outside class, how much did you usually study per week? *
(ক্লাস/লেকচার এর বাইরে, প্রতি সপ্তাহে কতটা পড়ালেখা করতে তুমি?)

- ☐ Less than 3 hrs
☐ 3-6 hrs
☐ 7-10 hrs
☐ 11-15 hrs
☐ More than 15 hrs

How often did stress make it difficult for you to study
(মানসিক চাপের কারণে কত ঘন ঘন তোমার পড়াশোনা করতে অসুবিধা হয়েছে?)

- ☐ Never
☐ Rarely
☐ Sometimes
☐ Often
☐ Almost always

What was your SGPA in the most recently completed semester?
(তোমার বিগত/সদ্য সমাপ্ত সেমিস্টারে SGPA কত ছিল?)

- ☐ 3.9+
☐ 3.75+
☐ 3.5+
☐ 3.2+
☐ 3.0+
☐ Below

Figure 3. Google Form screenshots: attendance, weekly self-study, stress and recent SGPA questions (the SGPA question shows Form A's six grade ranges).

When a class ended, how much of the topic was usually clear to you?
(একটি ক্লাস/লেকচার শেষ হবার পর ওই ক্লাসের পাঠের বিষয় সম্পর্কে তোমার ধারণা কতটুকু পরিষ্কার হতো?)

☐ Almost nothing
☐ A little
☐ About half
☐ Most of it
☐ Almost everything

Which study style sounds most like you?
(এর মধ্যে কোন ধরনের পড়ার স্টাইল তোমার সাথে মানায়?)

☐ Mostly just before exams
☐ Occasionally when necessary
☐ Regularly but not every day
☐ Mostly consistent routine
☐ Consistent throughout the semester

How study-friendly was the place where you lived?
(তোমার বাসস্থান কতটা শিক্ষাবান্ধব/শিক্ষার জন্যে উপযোগী ছিল?)

☐ Very distracting
☐ Somewhat distracting
☐ Neither good nor bad
☐ Mostly suitable
☐ Excellent for focused study

On a normal night, how much sleep did you get?
(একটি স্বাভাবিক রাতে তুমি কতক্ষণ ঘুমাও?)

☐ Less than 5 hrs
☐ 5-6 hrs
☐ 6-7 hrs
☐ 7-8 hrs
☐ More than 8 hrs

Before that semester, what was your CGPA?
(বিগত সেমিস্টারের আগে তোমার সিজিপিএ (CGPA) কত ছিল?) *

☐ 3.9+
☐ 3.75+
☐ 3.5+
☐ 3.2+
☐ 3.0+
☐ Below

Overall, how healthy and manageable was your semester routine?
(সামগ্রিকভাবে, তোমার সেমিস্টারের দৈনন্দিন রুটিন কতটা স্বাস্থ্যকর ও সামলানো সহজ ছিল?)

☐ Completely unmanageable
☐ Difficult to manage
☐ Average
☐ Mostly manageable
☐ Very healthy and balanced

Figure 4. Google Form screenshots: topic clarity, study style, living place, semester routine, sleep and the CGPA question (the class label).

■ Student Performance Analysis Form (Responses) — raw sheet

	A	B	C	D	E	F
1	What is your department?	What is your SGPA of the most recently completed semester?	What is your current CGPA?	How often were you actually present in class?	Outside class, how much did you usually study per week?	Stress made it difficult for you to study
2	CSE	3.75+	3.75+	90% or more (৯০% বা তার বেশি)	3-6 hrs (৩-৬ ঘন্টা)	Sometimes (কখনো কখনো)
3	CSE	3.50-3.74	3.55	90% or more (৯০% বা তার বেশি)	3-6 hrs (৩-৬ ঘন্টা)	Rarely (কদাচিৎ)
4	CSE	3.71	3.64	90% or more (৯০% বা তার বেশি)	Less than 3 hrs (৩ ঘন্টারও কম)	Sometimes (কখনো কখনো)
5	cse	jani na :3	etao jani na	60-74% (৬০-৭৪%)	Less than 3 hrs (৩ ঘন্টারও কম)	Never (কখনো না)
6	CSE	3.35	3.4	40-59% (৪০-৫৯%)	11-15 hrs (১১-১৫ ঘন্টা)	Often (প্রায়শই)
7	Computer Science and Engineering	3.52	3.51	90% or more (৯০% বা তার বেশি)	7-10 hrs (৭-১০ ঘন্টা)	Sometimes (কখনো কখনো)
8	CSE	3.04	3.11	75-89% (৭৫-৮৯%)	3-6 hrs (৩-৬ ঘন্টা)	Often (প্রায়শই)
9		3.68	3.52	90% or more (৯০% বা তার বেশি)	Less than 3 hrs (৩ ঘন্টারও কম)	Sometimes (কখনো কখনো)

Rendered preview of raw KUET answers before cleaning: bilingual labels and mixed GPA formats.

Figure 5. The response sheet (KUET form responses) before cleaning. Answers carry Bangla translations, grades appear as ranges or typed numbers, one student typed “jani na” (“I don’t know”; row removed), and department spellings differ (“CSE”, “cse”, “Computer Science and Engineering”).

after class, sleep, stress, outside commitments, phone and social-media distraction, living place, family and friend support, and semester routine.

- **Three further questions** (admission satisfaction, career expectation, result satisfaction), kept for description only.
- **Metadata:** submission timestamp (used only for the data check, never as a model input) and a `source_form` flag.

No physical units are involved. Time answers are hour ranges (for example “6–10 hrs” per week), and attendance answers are percentage ranges.

6.5 Annotation / labeling protocol

Nobody labelled the data by hand. The class label `cgpa_band` is the student’s own answer to the CGPA question, mapped to four groups with fixed cut-points: C0 below 3.20, C1 3.20–3.49, C2 3.50–3.74, C3 3.75 and above. Form A’s “Below” and “3.0+” both become C0, and “3.75+” and “3.9+” both become C3. Typed numbers on Form B (35 students) are put in a group by the same cut-points, and two “I don’t know” answers (“jani na”) are treated as missing. Four groups were used because Form B never offered finer ranges. The recent SGPA is grouped in the same way and becomes the input `recent_sgpa_band`. Because labels come from the students themselves, there is no inter-rater agreement to report. Section 9 describes how the labels were checked instead.

6.6 Provenance, versioning and raw-data preservation

The two Google Forms exports are stored unchanged in `raw-data/` and are never edited. Every processed file is rebuilt from them by scripts, so the full history of each change is in code (Section 10.6) and in the cleaning log `docs/cleaning_step_log.csv`. Files are named by stage and row count: `merged*_clean.csv` (1,108 rows) and `final_920.*` (920 rows). The released version is v1.0 (15 September 2026, Git commit 32ce1ce). Rows removed by the data check are not deleted from the record. They are listed in `dropped_182_rows.csv` with university, semester, date and gap.

7. Data Description / Data Records

7.1 Repository / Folder Structure

Folder / file	Contents	Raw / processed / metadata
raw-data/	The two original Google Forms CSV exports (230 and 896 responses)	Raw
cleaned-dataset/ours/merged/	merged_full_clean.csv (1,108 rows, every text, code and derived column), merged_primary_clean.csv, ARFF versions	Processed
cleaned-dataset/ours/final/final_920.csv, final_920.arff	Released ML files: 920 rows, 12 coded answers, recent SGPA group, CGPA group	Processed
cleaned-dataset/ours/final/final_920_with_details.csv	Same 920 rows plus university, department, semester, form, date, gap and answer text	Processed
cleaned-dataset/ours/final/answer_codes.csv	Meaning of every code 0–4 for each question	Metadata
cleaned-dataset/ours/final/dropped_182_rows.csv	The 182 removed answers with university, semester, date, groups and gap	Metadata
docs/cleaning_step_log.csv, docs/final_results.json	Cleaning audit trail; every number reported in the presentation and this report	Metadata
docs/weka_runs/final/	67 WEKA output logs (the command is on line 2 of each)	Metadata
notebooks/, report/build_report_assets.py	Code that rebuilds all processed files, results, tables and figures	Code
AGENTS.md, docs/FINAL_WEKA_STEPS.md	Project README and step-by-step WEKA usage guide	Documentation

7.2 Data Dictionary

Table 2 shows representative fields. Appendix A gives the complete dictionary of all released columns.

Table 2. Representative fields of final_920.csv / final_920.arff.

Variable / field	Meaning	Type	Unit / range	Allowed values / coding	Missing-value rule
attendance	How often the student was present in class	ordinal	0–4	0 Less than 40%, 1 40–59%, 2 60–74%, 3 75–89%, 4 90% or more	2 raw blanks filled with the form's median answer
weekly_study_time	Self-study outside class per week	ordinal	0–4 (hours)	0 <3, 1 3–6, 2 7–10, 3 11–15, 4 >15 hrs	median answer of the same form
weekly_responsibilities	Weekly hours on tuition, job, clubs or other duties	ordinal	0–4 (hours)	0 None, 1 1–5, 2 6–10, 3 11–15, 4 >15 hrs	blank = “None”
recent_sgpa_band	SGPA group of the last completed semester	nominal (ordered)	C0–C3	C0 <3.20, C1 3.20–3.49, C2 3.50–3.74, C3 ≥3.75	row removed
cgpa_band (class)	CGPA group (prediction target)	nominal (ordered)	C0–C3	same cut-points as SGPA	row removed

7.3 Dataset Composition and Descriptive Overview

This subsection gives the detailed statistics of the released 920 rows: composition by university, class, semester and department (7.3.1); missing values in the raw exports (7.3.2); and the answer distribution of every question with its link to the CGPA groups (7.3.3–7.3.4). Sample raw and processed responses are in Figure 5 and Table 19.

7.3.1 Composition by university, CGPA group, semester and department

Table 3. Final dataset by university and CGPA group. Semester numbering follows each university's own system: BUET students reported term numbers up to 12, and BRAC students reported trimester numbers.

University	n	%	C0	C1	C2	C3	Semesters	Responses received
KUET	690	75.0	130	223	203	134	1–7	31 Jul – 13 Aug
BUET	104	11.3	36	24	16	28	1–12	24 Aug – 28 Aug
BRAC	101	11.0	16	28	31	26	10–11	24 Aug – 03 Sep
CUET	25	2.7	0	9	14	2	7–7	22 Aug – 28 Aug
Total	920	100.0	182	284	264	190	1–8	31 Jul – 03 Sep
% of 920			19.8	30.9	28.7	20.7		

The four CGPA groups are close to balanced: the largest group (C1, 30.9%) is 1.56 times the smallest (C0, 19.8%). A model that always guesses the largest group is right 30.9% of the time, and this is the baseline every model must beat. KUET supplies three quarters of the rows. CUET has no student in C0 and only 25 rows, so results for CUET alone are not meaningful. The recent-SGPA groups are C0 171, C1 269, C2 261 and C3 219.

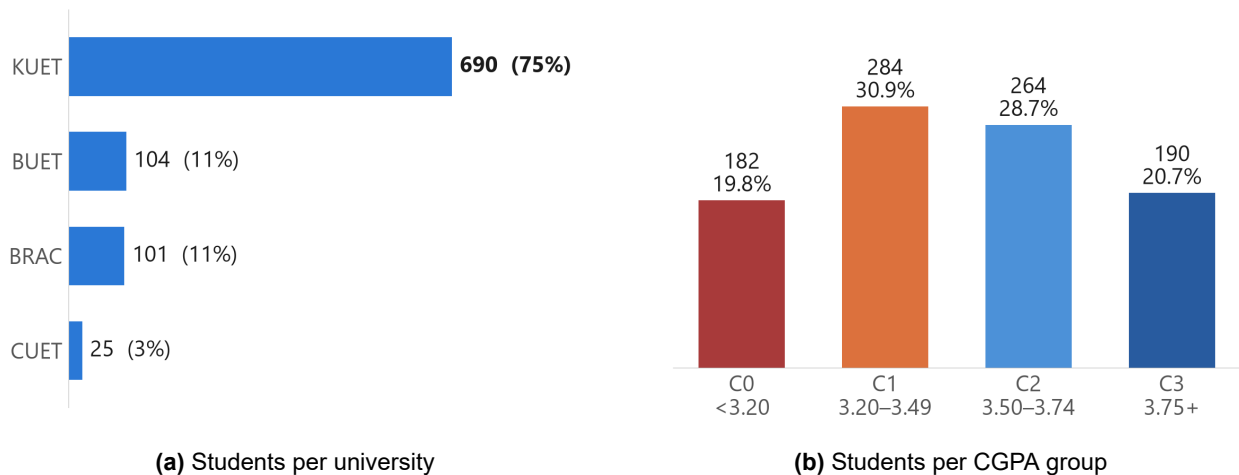


Figure 6. Composition of the 920 released rows (same charts as the presentation).

7.3.2 Missing values in the raw exports

Table 6 counts blank answers per question before cleaning. Form A made most questions compulsory, so only its department box has blanks. Its separate “if not listed” box is blank in 174 rows by design. On Form B, grades and department have the most blanks; every behaviour question is blank in fewer than 1.6% of rows. Form B’s e-mail column is empty in all 896 rows and was dropped.

7.3.3 Answer distribution of every question

Figure 7 shows how the 920 students answered each of the 12 questions used as model inputs. Figure 8 shows the three questions kept for description only. Table 7 summarises every question in one line.

Only three questions have a reliable link with the CGPA group, and all three links are weak: getting the desired department ($\rho = +0.134$), class attendance ($+0.093$) and outside commitments (-0.086). No answer share

Table 4. Current semester by university (920 rows).

Sem	KUET	BUET	BRAC	CUET	All	%
1	43	10	0	0	53	5.8
2	7	3	0	0	10	1.1
3	44	8	0	0	52	5.7
4	67	8	0	0	75	8.2
5	28	14	0	0	42	4.6
6	8	8	0	0	16	1.7
7	493	17	0	25	535	58.2
8	0	6	0	0	6	0.7
9	0	6	0	0	6	0.7
10	0	7	48	0	55	6.0
11	0	8	53	0	61	6.6
12	0	9	0	0	9	1.0
Total	690	104	101	25	920	100.0

Table 5. Department after name cleaning (24 values; 920 rows).

Dept.	n	%	Dept.	n	%
CSE	305	33.2	TE	18	2.0
EEE	107	11.6	ARCH	17	1.8
ME	84	9.1	Unknown	15	1.6
ECE	74	8.0	MTE	14	1.5
CE	58	6.3	ESE	9	1.0
MSE	51	5.5	MME	6	0.7
URP	29	3.2	NCE	6	0.7
IEM	26	2.8	PMRE	6	0.7
BECM	21	2.3	IPE	5	0.5
LE	20	2.2	NAME	4	0.4
ChE	19	2.1	MIE	4	0.4
BME	18	2.0	WRE	4	0.4

Table 6. Blank answers in the raw exports (Form A: 230 rows; Form B: 896 rows; percentage of all 1,126).

Field	Form A	Form B	Total	% of 1,126
Department	56	16	72	6.4
Semester	0	2	2	0.2
Recent SGPA	0	23	23	2.0
CGPA (target)	0	17	17	1.5
Got desired department	0	2	2	0.2
Class attendance	0	1	1	0.1
Self-study per week	0	1	1	0.1
Study style	0	1	1	0.1
Topic clear after class	0	2	2	0.2
Sleep per night	0	1	1	0.1
Stress blocked studying	0	1	1	0.1
Outside commitments	0	3	3	0.3
Phone / social media distraction	0	1	1	0.1
Study-friendly living place	0	1	1	0.1
Family / friend support	0	3	3	0.3
Semester routine manageable	0	11	11	1.0
Satisfied with admission	0	1	1	0.1
Course leads to dream career	0	2	2	0.2
Satisfied with last result	0	14	14	1.2

Table 7. Summary of every question on the 920 rows. Median and mean use the codes 0–4. ρ is the Spearman rank correlation with the CGPA group and with the recent SGPA group. “Reliable” means the CGPA correlation stays significant after Benjamini–Hochberg correction for 12 tests ($q < 0.05$) [15]. “Max shift” is the largest change, in percentage points, of any answer share between the 1,102 rows before the data check and the final 920.

Question	Most common answer	Median answer	Mean	SD	ρ CGPA	ρ SGPA	Reliable	Max shift
Got desired department	Yes, exactly what I wanted	Close to what I wanted	2.66	1.39	+0.134	+0.137	yes	2.5
Class attendance	90% or more	75-89%	3.08	0.87	+0.093	+0.111	yes	0.8
Self-study per week	3-6 hrs	7-10 hrs	1.76	1.33	+0.062	+0.060	no	1.4
Study style	Mostly just before exams	Mostly just before exams	1.52	1.28	+0.016	+0.014	no	2.2
Topic clear after class	About half	About half	1.85	1.22	+0.034	-0.017	no	2.0
Sleep per night	5-6 hrs	6-7 hrs	1.76	1.19	+0.025	+0.019	no	1.9
Stress blocked studying	Sometimes	Sometimes	2.16	1.24	-0.030	-0.000	no	1.4
Outside commitments	None	1-5 hrs	1.65	1.34	-0.086	-0.067	yes	1.3
Phone / social media distraction	Sometimes	Sometimes	2.38	1.23	-0.013	-0.013	no	1.6
Study-friendly living place	Mostly suitable	Neither good nor bad	2.23	1.22	+0.040	+0.054	no	2.8
Family / friend support	Good support	Some support	2.27	1.26	+0.055	+0.068	no	1.9
Semester routine manageable	Average	Average	1.87	1.16	+0.054	+0.059	no	1.8
Satisfied with admission	Very dissatisfied	Neutral	1.87	1.44	+0.022	+0.013	not used	5.1
Course leads to dream career	Somewhat	Somewhat	2.10	1.21	+0.090	+0.093	not used	1.8
Satisfied with last result	Very dissatisfied	Neutral	1.65	1.44	+0.138	+0.221	not used	4.2

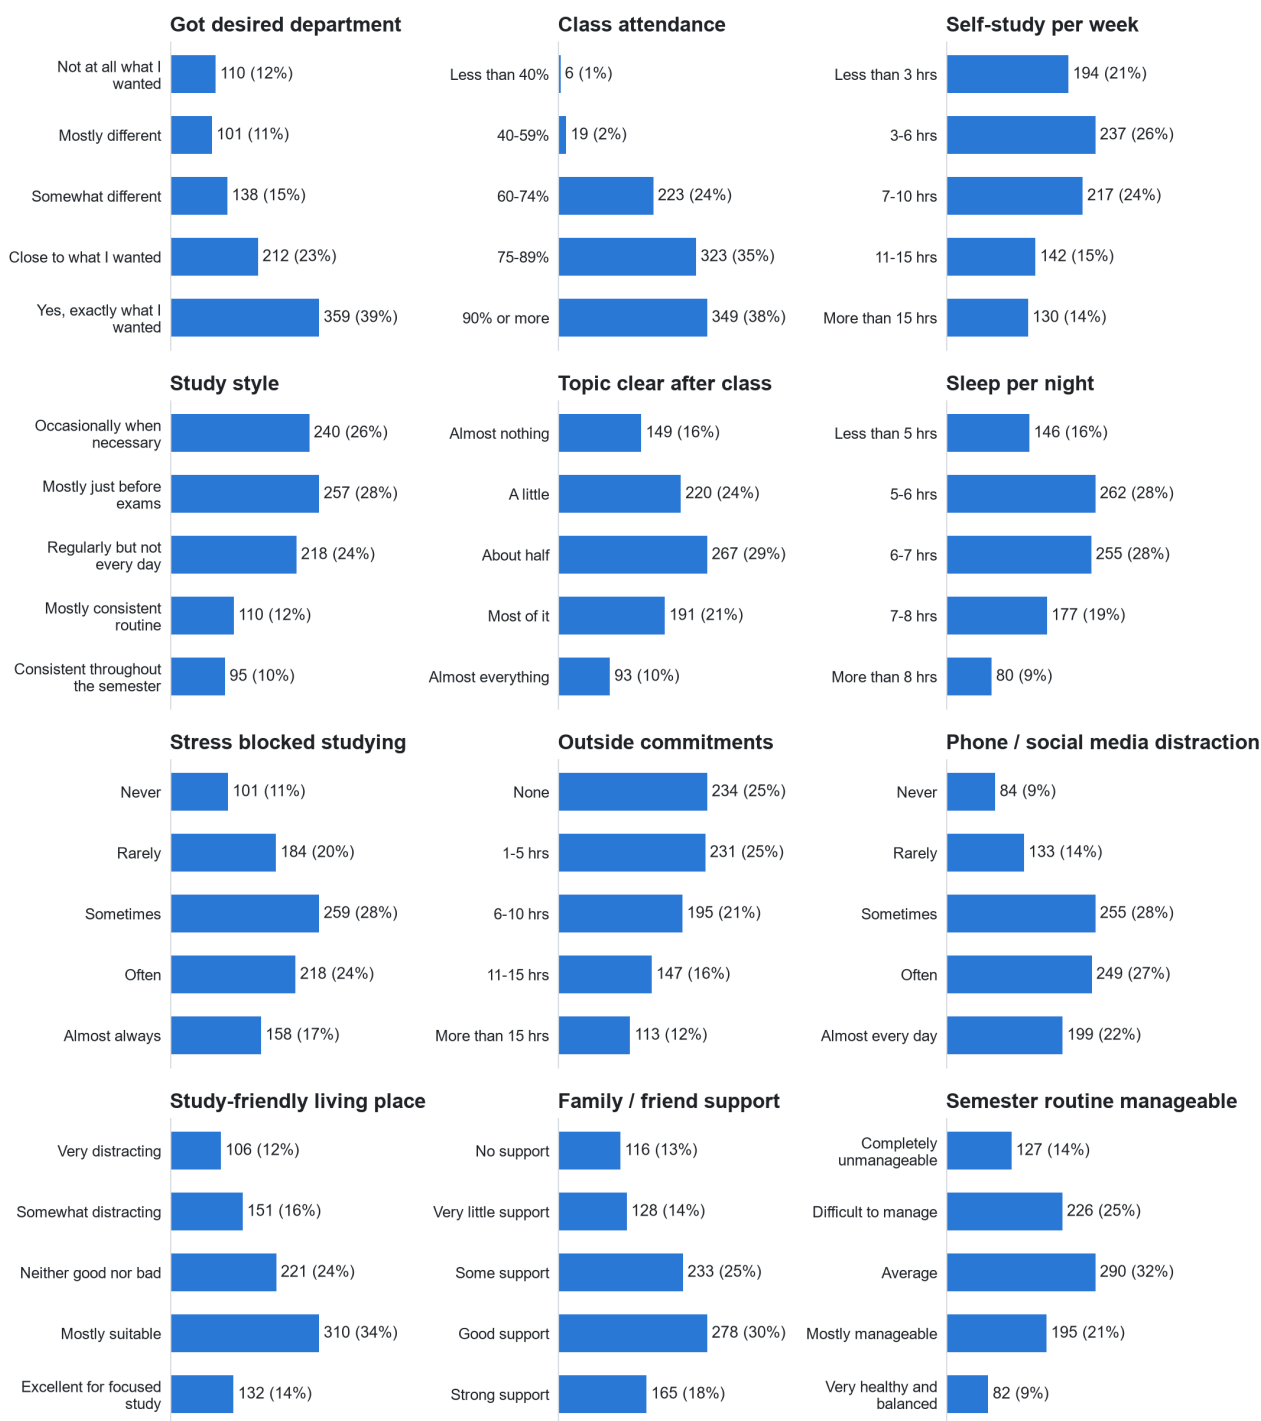


Figure 7. Answers to the 12 model-input questions (n and share of 920 students). Most students attend 75% of classes or more (73.0%), 44.3% sleep less than 6 hours, and 48.7% say their phone often or almost every day takes study time.

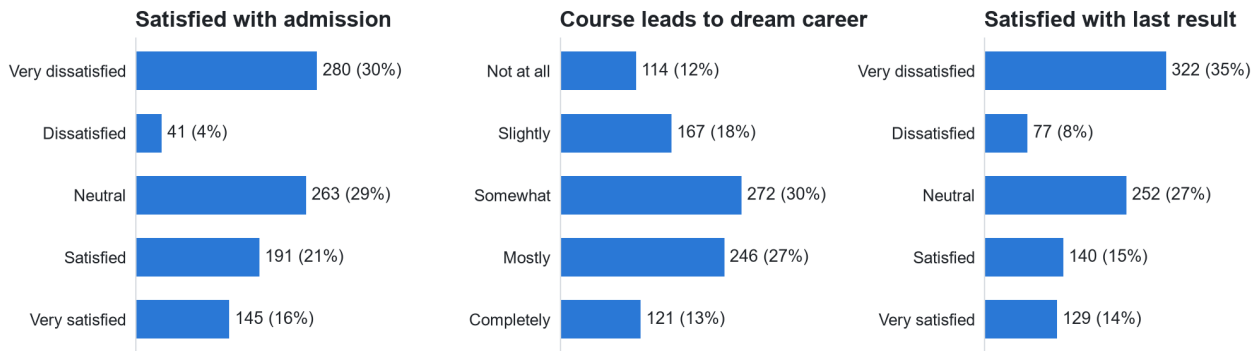


Figure 8. The three questions kept for description only. Result satisfaction is not used as a model input, because it depends on each student's own expectations. The high share of "Very dissatisfied" answers comes mainly from the KUET form (Section 12).

changed by more than a few percentage points because of the data check, so removing the 182 rows did not reshape the answer distributions.

7.3.4 Detailed answer statistics per question

Table 8 lists every answer option with its code, count and share, and, for the students who chose it, the percentage in each CGPA group (each row of C0–C3 adds up to 100%). Figures 9 and 10 show the same CGPA mix as charts, matching slides 29–40 of the presentation.

Table 8. Answer-level statistics for all 15 questions (920 rows). n and % describe the whole sample. C0–C3 are the percentages of the students choosing that answer who are in each CGPA group.

Code	Answer	n	%	C0 %	C1 %	C2 %	C3 %
Got desired department (desired_department_match, Model feature) — <i>Did you get into your desired subject or department?</i>							
0	Not at all what I wanted	110	12.0	26	33	26	14
1	Mostly different	101	11.0	34	23	24	20
2	Somewhat different	138	15.0	21	38	26	14
3	Close to what I wanted	212	23.0	18	29	29	24
4	Yes, exactly what I wanted	359	39.0	14	31	32	23
Most common: Yes, exactly what I wanted; median: Close to what I wanted; mean code 2.66 (SD 1.39); Spearman ρ with CGPA band = +0.134; raw blanks A/B = 0/2							
Class attendance (attendance, Model feature) — <i>How often were you actually present in class?</i>							
0	Less than 40%	6	0.7	33	17	33	17
1	40-59%	19	2.1	21	37	26	16
2	60-74%	223	24.2	22	31	30	17
3	75-89%	323	35.1	20	34	28	19
4	90% or more	349	37.9	18	28	29	26
Most common: 90% or more; median: 75-89%; mean code 3.08 (SD 0.87); Spearman ρ with CGPA band = +0.093; raw blanks A/B = 0/1							
Self-study per week (weekly_study_time, Model feature) — <i>Outside class, how much did you usually study per week?</i>							
0	Less than 3 hrs	194	21.1	23	29	31	17
1	3-6 hrs	237	25.8	24	30	29	17
2	7-10 hrs	217	23.6	14	32	30	24
3	11-15 hrs	142	15.4	18	34	25	22
4	More than 15 hrs	130	14.1	19	28	26	26
Most common: 3-6 hrs; median: 7-10 hrs; mean code 1.76 (SD 1.33); Spearman ρ with CGPA band = +0.062; raw blanks A/B = 0/1							

Code	Answer	n	%	C0 %	C1 %	C2 %	C3 %
Study style (study_style, Model feature) — <i>Which study style sounds most like you?</i>							
0	Occasionally when necessary	240	26.1	20	24	31	25
1	Mostly just before exams	257	27.9	24	34	26	16
2	Regularly but not every day	218	23.7	16	38	28	18
3	Mostly consistent routine	110	12.0	19	29	30	22
4	Consistent throughout the semester	95	10.3	16	25	32	27
Most common: Mostly just before exams; median: Mostly just before exams; mean code 1.52 (SD 1.28); Spearman ρ with CGPA band = +0.016; raw blanks A/B = 0/1							
Topic clear after class (topic_clarity, Model feature) — <i>When a class ended, how much of the topic was usually clear to you?</i>							
0	Almost nothing	149	16.2	22	34	27	18
1	A little	220	23.9	21	29	26	24
2	About half	267	29.0	18	33	31	17
3	Most of it	191	20.8	18	29	32	21
4	Almost everything	93	10.1	23	28	23	27
Most common: About half; median: About half; mean code 1.85 (SD 1.22); Spearman ρ with CGPA band = +0.034; raw blanks A/B = 0/2							
Sleep per night (sleep_duration, Model feature) — <i>On a normal night, how much sleep did you get?</i>							
0	Less than 5 hrs	146	15.9	18	38	25	18
1	5-6 hrs	262	28.5	20	28	32	20
2	6-7 hrs	255	27.7	19	34	28	19
3	7-8 hrs	177	19.2	18	28	28	26
4	More than 8 hrs	80	8.7	26	25	29	20
Most common: 5-6 hrs; median: 6-7 hrs; mean code 1.76 (SD 1.19); Spearman ρ with CGPA band = +0.025; raw blanks A/B = 0/1							
Stress blocked studying (stress_frequency, Model feature) — <i>How often did stress make it difficult for you to study?</i>							
0	Never	101	11.0	21	33	25	22
1	Rarely	184	20.0	18	28	38	17
2	Sometimes	259	28.2	16	34	27	23
3	Often	218	23.7	20	35	22	22
4	Almost always	158	17.2	27	22	33	18
Most common: Sometimes; median: Sometimes; mean code 2.16 (SD 1.24); Spearman ρ with CGPA band = -0.030; raw blanks A/B = 0/1							
Outside commitments (weekly_responsibilities, Model feature) — <i>How much time did tuition, a job, club activities or other responsibilities take each week?</i>							
0	None	234	25.4	20	26	29	26
1	1-5 hrs	231	25.1	20	29	28	24
2	6-10 hrs	195	21.2	16	37	30	16
3	11-15 hrs	147	16.0	22	31	30	16
4	More than 15 hrs	113	12.3	22	35	26	16
Most common: None; median: 1-5 hrs; mean code 1.65 (SD 1.34); Spearman ρ with CGPA band = -0.086; raw blanks A/B = 0/3							
Phone / social media distraction (distraction_frequency, Model feature) — <i>How often did your phone, gaming, social media or entertainment steal your planned study time?</i>							
0	Never	84	9.1	21	20	33	25
1	Rarely	133	14.5	21	27	35	17
2	Sometimes	255	27.7	17	36	29	18
3	Often	249	27.1	19	33	26	22
4	Almost every day	199	21.6	23	29	26	23

Code	Answer	n	%	C0 %	C1 %	C2 %	C3 %
Most common: Sometimes; median: Sometimes; mean code 2.38 (SD 1.23); Spearman ρ with CGPA band = -0.013; raw blanks A/B = 0/1							
Study-friendly living place (study_environment, Model feature) — <i>How study-friendly was the place where you lived?</i>							
0	Very distracting	106	11.5	33	24	23	21
1	Somewhat distracting	151	16.4	21	32	24	22
2	Neither good nor bad	221	24.0	15	35	31	19
3	Mostly suitable	310	33.7	14	31	34	21
4	Excellent for focused study	132	14.3	27	28	22	23
Most common: Mostly suitable; median: Neither good nor bad; mean code 2.23 (SD 1.22); Spearman ρ with CGPA band = +0.040; raw blanks A/B = 0/1							
Family / friend support (support_level, Model feature) — <i>When academic life became difficult, how much support did you receive from family or close friends?</i>							
0	No support	116	12.6	23	26	31	20
1	Very little support	128	13.9	27	27	27	20
2	Some support	233	25.3	18	40	24	17
3	Good support	278	30.2	15	29	32	24
4	Strong support	165	17.9	22	28	30	21
Most common: Good support; median: Some support; mean code 2.27 (SD 1.26); Spearman ρ with CGPA band = +0.055; raw blanks A/B = 0/3							
Semester routine manageable (routine_manageability, Model feature) — <i>Overall, how healthy and manageable was your semester routine?</i>							
0	Completely unmanageable	127	13.8	27	32	31	10
1	Difficult to manage	226	24.6	21	30	21	28
2	Average	290	31.5	16	33	32	19
3	Mostly manageable	195	21.2	17	30	32	22
4	Very healthy and balanced	82	8.9	24	27	28	21
Most common: Average; median: Average; mean code 1.87 (SD 1.16); Spearman ρ with CGPA band = +0.054; raw blanks A/B = 0/11							
Satisfied with admission (admission_satisfaction, Collected, not a model feature) — <i>How satisfied are you with getting admitted into your university (KUET form: into KUET)?</i>							
0	Very dissatisfied	280	30.4	18	31	32	19
1	Dissatisfied	41	4.5	27	22	24	27
2	Neutral	263	28.6	22	34	28	16
3	Satisfied	191	20.8	12	35	29	24
4	Very satisfied	145	15.8	28	21	23	28
Most common: Very dissatisfied; median: Neutral; mean code 1.87 (SD 1.44); Spearman ρ with CGPA band = +0.022; raw blanks A/B = 0/1							
Course leads to dream career (career_expectation, Collected, not a model feature) — <i>Do you think this course of study will take you to your dream career?</i>							
0	Not at all	114	12.4	25	32	25	17
1	Slightly	167	18.2	22	34	23	21
2	Somewhat	272	29.6	16	37	30	17
3	Mostly	246	26.7	17	26	35	22
4	Completely	121	13.2	24	23	23	30
Most common: Somewhat; median: Somewhat; mean code 2.10 (SD 1.21); Spearman ρ with CGPA band = +0.090; raw blanks A/B = 0/2							

Code	Answer	n	%	C0 %	C1 %	C2 %	C3 %
Satisfied with last result (result_satisfaction, Collected, not a model feature) — <i>How satisfied were you with your latest semester result?</i>							
0	Very dissatisfied	322	35.0	26	29	29	17
1	Dissatisfied	77	8.4	26	32	27	14
2	Neutral	252	27.4	14	38	29	19
3	Satisfied	140	15.2	17	30	29	24
4	Very satisfied	129	14.0	17	20	28	35
Most common: Very dissatisfied; median: Neutral; mean code 1.65 (SD 1.44); Spearman ρ with CGPA band = +0.138; raw blanks A/B = 0/14							

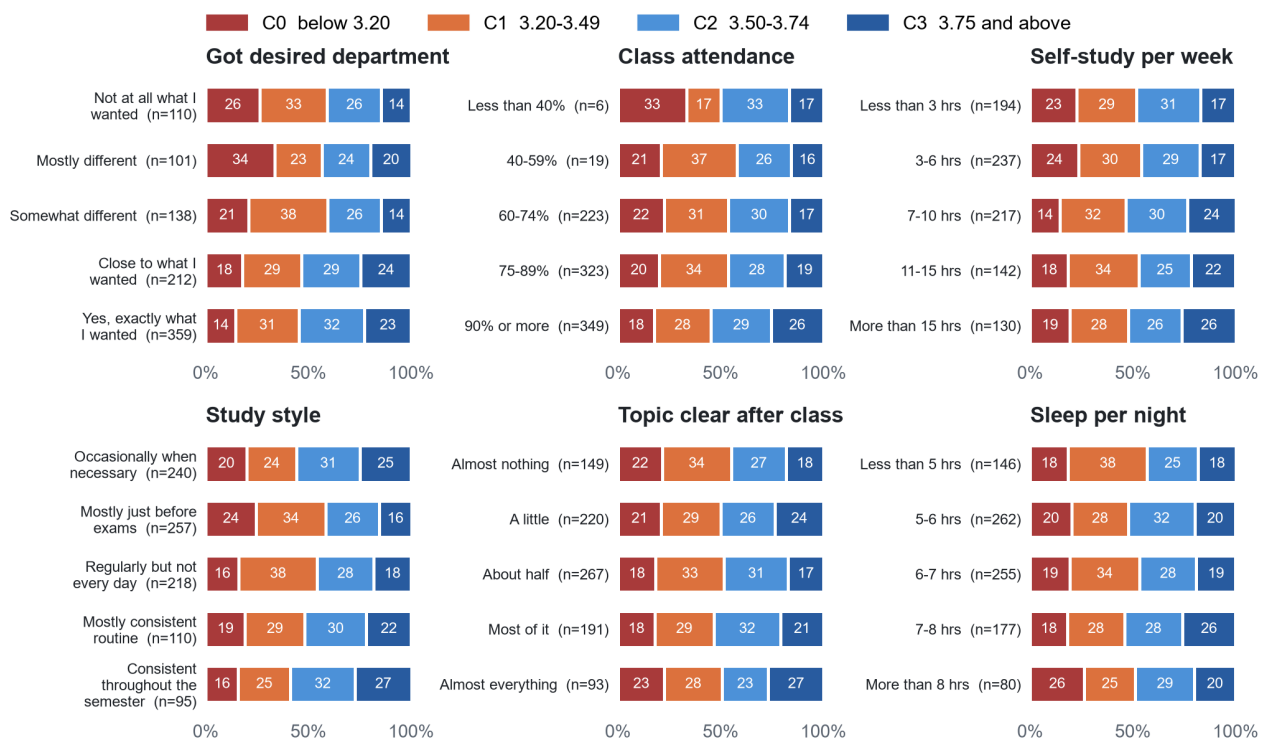


Figure 9. CGPA-group mix for each answer, questions 1–6. Each bar is 100% of the students who chose that answer. Numbers inside the bars are percentages; segments under 10% are not labelled.

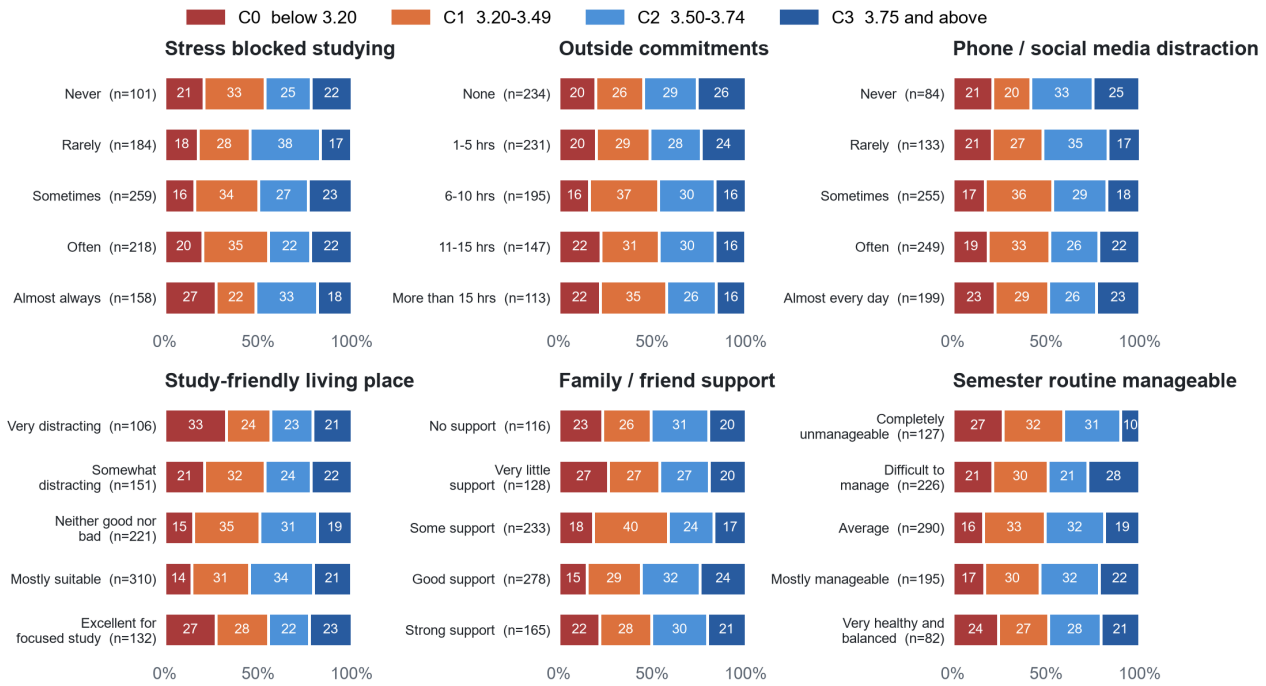


Figure 10. CGPA-group mix for each answer, questions 7–12. The bars look similar from answer to answer, which is why the questions alone predict the CGPA group only weakly (Section 10.7).

8. Data Preprocessing, Curation and Leakage Control

Every step is scripted. The cleaning, missing-data, outlier, de-identification and leakage rules are applied once to the released files. Only the encoding and the choice of features to leave out are model-specific decisions.

• Cleaning.

- Each row column of both forms was mapped by hand to one `snake_case` name, with a check that every column is covered.
- The Bangla translation in brackets and the emojis were removed from Form B answers, so “90% or more” followed by its Bangla translation becomes “90% or more” (Figure 5); without this step the two forms would share no answer values.
- Ten university spellings were reduced to 4 (“BRAC / Brac / BRAC / BRAC University”).
- The two department boxes were combined, and 110 department spellings were reduced to 24 departments (“CSE / cse / Computer Science and Engineering”). One unclear entry (“Mecha”) was marked Unknown rather than guessed.
- One study-style label written two ways was made the same.
- The two grade formats and typed numbers were turned into the four groups C0–C3.
- The timestamp and the empty e-mail column were left out of the ML files.
- There are no identical duplicate rows: every response has its own timestamp.

• Missing data.

- Rows with no usable CGPA answer (18, including two “I don’t know”) were removed, because a row without a label cannot be used for training.
- Rows whose recent SGPA was blank or unusable (6) were removed from the released ML files. Filling them in would have meant guessing an input from the label.
- A blank outside-commitments answer was filled with “None”. On Form B, where “None” was an option, 26.5% chose it.

- Other scattered blanks (under 1.6% of any question) were filled with the median answer of the same form. We used the median, not the mean, because the answers are ordered categories.
- Semester blanks (2) were filled with the median semester of the same university.
- **Outliers / noise.** Answers are fixed choices, so there are no impossible values. The noise check compared each student’s recent SGPA group with their CGPA group. A gap of two or three groups is possible for a few students, but it is unusual: one semester changes a multi-semester CGPA only a little. Such gaps were concentrated in the KUET semester-7 answers sent on 6–7 August: 182 of 455 answers (40.0%), against 9.3% for all other students (Section 9, Table 9). In that batch SGPA and CGPA were unrelated (Spearman $\rho = -0.04$, against $+0.62$ for everyone else). We therefore removed the 182 answers in that batch with a gap of 2–3 groups and kept its other 273 answers. The removed rows are listed in a separate file. Big-gap answers outside that batch (for example 37 at BUET) were kept, because nothing else about them looked unusual.
- **Encoding / scaling.** Every five-option answer was coded 0–4 from lowest to highest, keeping the order (Appendix A). The recent SGPA group and the CGPA group are nominal attributes {C0, C1, C2, C3} in the ARFF file. No scaling was applied to the released files. WEKA’s SMO and Logistic apply their own default normalisation inside each training fold.
- **Features left out.** Result satisfaction is left out because it is a subjective reaction to the result, depending on each student’s own goals. `source_form`, university, department, semester and timestamp are also left out of the model inputs, so the models learn from student answers, not from where or when the form was filled in. Admission satisfaction and career expectation are kept for description only, matching the presentation.
- **Augmentation / synthetic data.** None. No row was generated, copied or oversampled.
- **De-identification.** The forms collected no names, roll numbers, phone numbers or exact income. The e-mail column was empty and is removed. Timestamps are kept only as a date in the detail file, and university plus department groups are coarse. A few small groups (for example 4 students of one rare BUET department) are reported only as counts.
- **Leakage control.**
 - The grouping key is the individual response. Each row is a different anonymous student, and nobody was surveyed twice by design.
 - All cleaning uses fixed rules, not statistics learned from the data, so nothing about a test fold leaks into training.
 - WEKA’s stratified cross-validation places every row in exactly one test fold.
 - One caveat is stated openly. The removal rule uses the SGPA–CGPA gap, which involves the label, so it is limited to one batch identified by date and semester, and results before the check are always reported next to results after it (Table 15).
 - The two forms word the CGPA question slightly differently: Form A asks for the CGPA “before that semester”, and Form B asks for the “current” CGPA. So for KUET rows the recent SGPA is partly included in the CGPA. This is listed as a limitation.

9. Technical Validation and Data Quality

Quality dimension	Evidence / checks performed
Completeness	1,126 responses were received and all 1,126 are in the raw files. 1,108 have a usable CGPA and 1,102 also a real recent SGPA. Blank answers per question are counted in Table 6. The released 920 rows have no missing values; the script stops if any remain.
Consistency	The column map is checked to cover every raw column. Every answer must match a known option, or the encoding step stops. Answer labels are identical across the two forms after the Bangla text is removed. University and department spellings are standardised. Each response has a unique timestamp, so there are no duplicate submissions.
Label quality	Labels are self-reported ranges, not registrar records. We checked them against the linked recent-SGPA question: 78% of 1,102 students are within one group (Figure 11). Big gaps were concentrated in one batch (Tables 9–11). In the final data SGPA and CGPA agree strongly ($\rho = 0.65$; Figure 12).
Measurement quality	Single-choice options with fixed ranges prevent impossible values. Questions were bilingual to avoid misreading. Weak points: self-report, and the different time reference of the CGPA question on the two forms.
Integrity	Raw exports are kept unchanged. Scripts assert that the 1,108 rows line up one-to-one with the raw timestamps and CGPA answers before any merge. All 67 WEKA logs are stored with their exact commands.
Representativeness / bias	KUET is 75% of rows, and KUET semester 7 dominates it. The sample is convenience-based. Classes are close to balanced (ratio 1.56). CUET has only 25 rows and no C0 student. Gender and income were not collected (Section 12).
Reproducibility	<code>final_weka_results.py</code> rebuilds the 920-row CSV and ARFF and every WEKA result from the cleaned file. The notebook rebuilds the cleaned file from <code>raw-data/</code> . <code>build_report_assets.py</code> rebuilds every table and figure in this report. Seeds are fixed (WEKA <code>-s 1</code>).

The SGPA–CGPA check in detail. A CGPA averages several semesters, so one semester rarely moves it by more than one group. For example, a student with CGPA 3.80 after five semesters who gets SGPA 2.80 in the sixth semester ends with CGPA 3.63, moving only from C3 to C2. Figure 11 shows that 860 of the 1,102 students (78%) are within one group, and 242 are two or three groups apart. Tables 10 and 11 show where the big gaps come from. There are none at BRAC or CUET, and almost all KUET big gaps are in semester 7. Within semester 7 they appear on 6–7 August, when 455 answers arrived in two days (Table 9).

Table 9. Gap between recent SGPA group and CGPA group, by group of rows. ρ is the Spearman correlation between the two grades.

Rows	n	Gap 0	Gap 1	Gap 2	Gap 3	% gap ≥ 2	ρ
6–7 Aug KUET semester 7 (checked group)	455	113	160	121	61	40.0	-0.04
All other students	647	395	192	38	22	9.3	0.62
Final dataset	920	508	352	38	22	6.5	0.65

The 182 removed answers are 121 with a gap of two groups and 61 with a gap of three. In 92 the SGPA is lower than the CGPA and in 90 it is higher, so the removal does not favour better or worse students. By date, 131 were sent on 6 August and 51 on 7 August. Because the removed rows are split almost evenly between “SGPA too low” and “SGPA too high”, the removal does not shift the CGPA distribution towards one end (C0 54, C1 36, C2 36, C3 56 removed). Table 12 shows the agreement of the two grades in the released data.

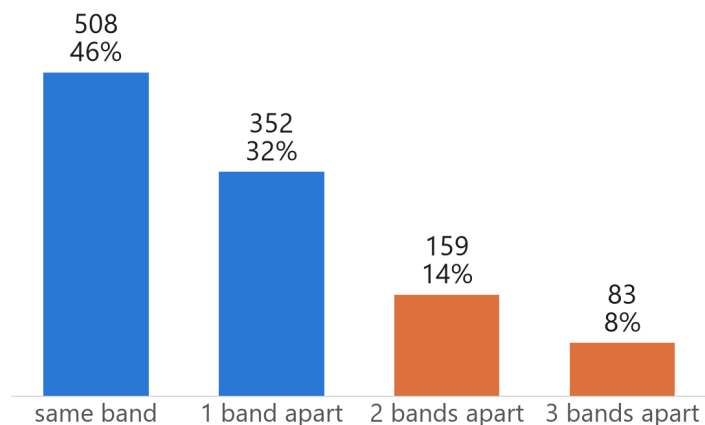


Figure 11. Gap between the recent SGPA group and the CGPA group for the 1,102 rows with both grades. Orange marks a gap of 2–3 groups.

Table 10. Big gaps (2–3) by university.

Uni.	n	Big	%
BRAC	101	0	0.0
BUET	104	37	35.6
CUET	25	0	0.0
KUET	872	205	23.5

Table 11. Big gaps by KUET semester.

Sem	n	Big	%
1	43	0	0.0
2	7	0	0.0
3	44	0	0.0
4	67	3	4.5
5	28	3	10.7
6	8	0	0.0
7	675	199	29.5

		CGPA band			
		C0	C1	C2	C3
Recent SGPA band	C0	102	49	8	12
	C1	59	146	59	5
	C2	11	75	131	44
	C3	10	14	66	129

Figure 12. Recent SGPA group (rows) against CGPA group (columns) for the 920 students in the final dataset. Blue cells are the same group or one group apart (860 students, 93.5%).

Table 12. Recent SGPA group against CGPA group in the released 920 rows. Blue cells: same group (508 students, 55.2%); a further 352 (38.3%) are one group apart.

	CGPA C0	CGPA C1	CGPA C2	CGPA C3	Total
Recent SGPA C0	102	49	8	12	171
Recent SGPA C1	59	146	59	5	269
Recent SGPA C2	11	75	131	44	261
Recent SGPA C3	10	14	66	129	219
Total	182	284	264	190	920

9.1 Comparison with Existing Datasets and Significance

Table 13 compares our dataset with public student-performance datasets that are often used in machine learning courses and papers, and with the Bangladeshi studies cited in our presentation.

Table 13. Comparison with related datasets. Figures are as reported by the dataset authors.

Dataset	Population / place	Records	Features	Target	Collection / access
UCI Student Performance [4]	Two secondary schools, Portugal	649 + 395	30 attributes + 3 grades	Final grade G3 (0–20)	School reports and questionnaire; UCI, open
Predict Students' Dropout and Academic Success [5]	One higher-education institution, Portugal	4,424	36	Dropout / enrolled / graduate	Administrative records; UCI, open
Higher Education Students Performance Evaluation [6]	Engineering and education faculties, Cyprus	145	31	Course grade (8 classes)	Questionnaire; UCI, open
xAPI-Edu-Data [7]	Kalboard 360 learning platform users	480	16	Low / middle / high	LMS logs and parent survey; open
Maruf et al. [2]; Albonny and Duru [3]	Bangladeshi SSC/HSC and secondary-school students	–	–	Exam results; average course grade	Studies; data not released with a data descriptor
This dataset	Engineering undergraduates at 4 universities, Bangladesh	1,126 raw; 920 final	12 behaviour answers + recent SGPA (15 answers + context in detail file)	CGPA group C0–C3	Bilingual Google Forms; raw + processed + removal list; GitHub

Novelty and significant properties.

- It is, to our knowledge, the first openly documented dataset linking study habits and well-being to CGPA for *engineering undergraduates in Bangladesh*, across four universities.
- It is a large primary sample compared with similar questionnaire datasets: 920 checked rows against 145 in [6].
- Raw bilingual exports, cleaned files, the list of removed rows and the scripts are released together, so every cleaning decision can be checked or reversed.
- It includes a documented label check (SGPA against CGPA) that finds a batch of unreliable answers. This is useful teaching material on survey data quality [16], which most public datasets do not provide.
- All answers use fixed five-level codes with published meanings, and the files load directly in WEKA (ARFF) or Python (CSV).

10. Machine Learning (ML) Use Demonstration

10.1 ML task definition

Task: four-class classification (the classes are ordered). **Input X :** the 12 coded answers (numeric 0–4) and `recent_sgpa_band` (nominal C0–C3). **Target y :** `cgpa_band` (C0–C3). **Unit of prediction:** one student. **Practical output:** the student’s likely CGPA group, with readable J48 rules. Two extra experiments on the same 920 rows show how much the questions carry on their own: the questions only, predicting the CGPA group, and the questions only, predicting the recent SGPA group.

10.2 Data partitioning strategy

The main evaluation is WEKA’s **stratified 5-fold cross-validation** with random seed 1 (`-x 5 -s 1`). Each of the 920 students is tested exactly once, by a model that did not see them in training, and each fold keeps the class proportions. As a backup, WEKA’s **80/20 percentage split** with seed 1 (`-split-percentage 80 -s 1`) trains on 736 students and tests on 184. Its test set has 35, 66, 46 and 37 students in C0–C3. No separate validation set was used, because no hyperparameter was tuned on the test data: J48’s minimum leaf size of 40 was fixed so the tree stays small and readable. Leakage safety: every row is a different student, and no statistic is fitted before splitting (Section 8).

10.3 Preprocessing and feature/representation steps

The ML files use exactly the fixed coding in Appendix A. No step is fitted on the data before splitting. Inside WEKA, SMO normalises numeric inputs to 0–1 and converts the nominal SGPA group to binary indicators. Logistic applies the same indicator coding. Both steps are recomputed on each training fold by WEKA. J48, Random Forest, OneR and Naive Bayes use the attributes as they are.

10.4 ML model(s) and hyperparameters

All models use WEKA 3.8.7 [8]. ZeroR (always predicts the largest class) is the baseline.

- **J48** (C4.5 decision tree [9]): `-C 0.25 -M 40` (confidence 0.25, at least 40 students per leaf).
- **Random Forest** [10]: `-P 100 -I 100 -num-slots 1 -K 0 -M 1.0 -V 0.001 -S 1` (100 trees).
- **SMO** (support vector machine [11]): WEKA defaults ($C = 1.0$, linear polynomial kernel, inputs normalised).
- **Logistic regression** [12]: `-R 1.0E-8 -M -1`.
- **Naive Bayes** [13] and **OneR** [14] (`-B 6`): WEKA defaults.

10.5 Evaluation metrics

The four classes are close to balanced, so **accuracy** is a fair main metric, always compared with the ZeroR baseline (30.87%). We also report:

- **Cohen’s kappa** [17]: agreement beyond chance.
- **Macro-F1**: every class counts equally, so the smallest group C0 is not ignored.
- **Weighted F1**.
- **Within-one-group rate**: the share of predictions no more than one CGPA group away from the truth, which matters because the classes are ordered.
- The **confusion matrix**.

10.6 Reproducibility

- **Environment.** Windows 11; Python 3.14.5 in the project venv; WEKA 3.8.7 with its bundled Java runtime (flag `--add-opens java.base/java.lang=ALL-UNNAMED`).
- **Scripts.** `notebooks/final_weka_results.py` builds `final_920.csv/.arff`, runs all 7 models $\times$ 3 experiments $\times$ {5-fold CV, 80/20 split}, and writes the logs to `docs/weka_runs/final/` and the numbers to `docs/final_results.json`.
- **Manual check.** `docs/FINAL_WEKA_STEPS.md` explains how to repeat every result in the WEKA Explorer (Classify tab, Cross-validation, Folds = 5, seed = 1).
- **Seeds.** Random seed 1 for cross-validation, the split and Random Forest.
- **Hardware.** An ordinary laptop; every run takes seconds.

10.7 Results (compact)

Table 14. WEKA results on the 920 rows, stratified 5-fold cross-validation, seed 1. Main task: 12 answers + recent SGPA group $\rightarrow$ CGPA group. The last two columns give accuracy when only the 12 answers are used.

Model	Accuracy %	Kappa	Macro-F1	Weighted F1	Within 1 group %	Answers only $\rightarrow$ CGPA %	Answers only $\rightarrow$ SGPA %
ZeroR	30.87	0.000	0.118	0.146	79.3	30.87	29.24
OneR	55.22	0.397	0.559	0.551	93.5	33.80	27.39
J48 (C4.5 tree)	54.35	0.384	0.550	0.542	92.5	27.83	26.30
Random Forest	54.24	0.383	0.548	0.542	90.5	30.54	32.39
SMO	55.22	0.397	0.559	0.551	93.5	28.15	27.93
Logistic	54.67	0.388	0.553	0.546	92.8	30.11	29.02
Naive Bayes	54.46	0.386	0.552	0.544	92.6	31.20	30.00

Table 15. Main task, 5-fold CV, before and after the data check (same models and settings).

Model	1,102 rows	920 rows
ZeroR	29.04	30.87
J48	43.56	54.35
Random Forest	45.01	54.24
SMO	46.10	55.22
Logistic	46.37	54.67
Naive Bayes	44.83	54.46

Table 16. Confusion matrix, SMO, main task, 5-fold CV (rows actual, columns predicted; blue = correct).

	C0	C1	C2	C3	Total
Actual C0	102	59	11	10	182
Actual C1	49	146	75	14	284
Actual C2	8	59	131	66	264
Actual C3	12	5	44	129	190

Table 17. Backup check: WEKA 80/20 percentage split, seed 1 (736 training, 184 test students). With only 184 test students these numbers move more than the cross-validation results.

Model	Main accuracy %	Kappa	Answers only $\rightarrow$ CGPA %	Answers only $\rightarrow$ SGPA %
ZeroR	35.87	0.000	35.87	30.43
OneR	51.09	0.338	25.54	29.89
J48 (C4.5 tree)	51.09	0.338	33.15	27.17
Random Forest	45.65	0.258	26.63	33.15
SMO	51.09	0.338	29.35	25.54
Logistic	50.00	0.324	27.72	28.80
Naive Bayes	52.17	0.352	28.80	26.63

What this shows about dataset usability.

- The released data supports a working WEKA pipeline. Every model beats the 30.87% baseline by more than 23 points on the main task, with kappa about 0.38–0.40, and 93% of SMO’s predictions are within one CGPA group.
- The best models (SMO 55.22%, Logistic 54.67%, J48 54.35%) are close together, so the result does not depend on one algorithm.
- The J48 tree with at least 40 students per leaf uses only the recent SGPA group: one rule per group (Figure 13). The same tree with WEKA’s default leaf size of 2 grows to 175 leaves and scores only 46.52%.
- With the answers alone, every model stays near the baseline (27.8–33.8%). The habits in this questionnaire relate to CGPA only weakly (Section 7.3.3), which is itself a useful finding for anyone reusing the data.
- The data check raised every model by about 8–11 points (Table 15), which shows how much careless answers can hide.

We do not claim these models are good enough to decide anything about an individual student.

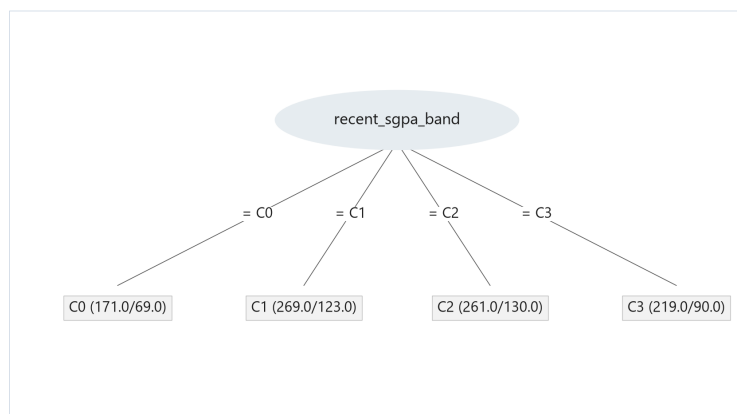


Figure 13. WEKA J48 tree for the main task, built on all 920 students ($-C\ 0.25\ -M\ 40$). Leaf labels show (students in leaf / students placed in the wrong group).

11. Usage Notes and Reuse Potential

- **Download and load.** Clone or download the GitHub repository. In WEKA: Explorer → Preprocess → Open file → cleaned-dataset/ours/final/final_920.arff (it should show 920 instances and 14 attributes); the class is `cgpa_band`. In Python: `pandas.read_csv("final_920.csv")`. When reading the detail file, keep “None” as text (`keep_default_na=False`).
- **Software.** WEKA 3.8.x, or any CSV reader. Rebuilding the files needs Python 3.14 with pandas, NumPy and SciPy (versions in Section 3).
- **Coding conventions.** Answers are coded 0 (lowest option) to 4 (highest option); `answer_codes.csv` gives each meaning. For study style, 0 is “Occasionally when necessary” and 1 is “Mostly just before exams”. Groups C0–C3 use the cut-points 3.20, 3.50 and 3.75. Use the ARFF rather than the CSV in WEKA, so the class order C0–C3 is fixed.
- **Precautions.**
 - KUET semester 7 dominates the sample.
 - The CGPA question has a different time reference on the two forms.
 - Grades are self-reported ranges.
 - Use stratified cross-validation, and report ZeroR next to any accuracy.
 - Do not use `source_form`, university or date as model inputs if the aim is to learn about student behaviour.
- **Potential reuse.** Ordinal classification methods; cost-sensitive learning where a two-group error counts

more; clustering of student habit profiles; comparing universities with the detail file; careless-response detection with `dropped_182_rows.csv`; extending the survey to more universities or semesters with the same codes.

- **Misleading uses.**

- Do not read the associations as causes (for example “attending more will raise your CGPA”).
- Do not rank individual students or make admission, scholarship or disciplinary decisions from these models.
- Do not generalise to non-engineering or non-Bangladeshi students without new data.

12. Limitations and Known Biases

- **Self-report.** All answers, including grades, are self-reported and were not checked against registrar records.
- **Convenience sample.** The sample is KUET-heavy (75%, mostly semester 7), so results may not describe other years or universities. CUET (25 rows) and several departments are very small.
- **Grade format.** Grades are ranges, so small differences inside a group are lost. The CGPA question refers to “before that semester” on Form A and “current” on Form B.
- **Data check.** The check removed only the clearest unreliable answers (182). Some kept answers may still be careless, and some removed answers may have been honest.
- **Satisfaction answers.** KUET students gave many “Very dissatisfied” answers to the admission and result satisfaction questions (360 and 387 of 896 raw answers). These may reflect real feelings or the order in which the options were shown, so they are not used as model inputs.
- **Missing context.** Gender, family income and school background were not collected, so bias along these lines cannot be checked.
- **One point in time.** The survey was a single round, so changes over time cannot be studied.

13. Ethics, Privacy and Responsible Data Use

Human participants / consent	Adult university students took part voluntarily and anonymously in a course project. The form’s opening text explained the purpose and stated that the survey was anonymous. Submitting the form was taken as consent. No institutional ethics-board approval was requested for this course project.
Privacy / de-identification	No names, roll numbers, phone numbers or exact income were collected. The e-mail column (empty) was removed. Released files keep only university, department, semester and the submission date, and results for very small groups are shown only as counts.
Web / social-media data	Not applicable. Form links were shared in student groups, but no content was collected from social-media platforms.
Copyright / third-party data	All questions and answers were created and collected by the group. Google Forms was used as a tool only. Figures of related datasets are cited from their authors [4]–[7].
AI-generated / synthetic content	No synthetic or AI-generated data are in the dataset: 0% of rows. An AI coding assistant (Claude, Anthropic) helped write cleaning and analysis scripts and draft documentation text. All numbers come from the scripts and WEKA logs in the repository and were reviewed by the group.

14. Data and Code Availability

Item	Details
Repository name	GitHub (SheikhGalib/CGPA-does-matter-dataset-ml-lab)
Dataset DOI / persistent identifier	Not yet assigned (a Zenodo archive of release v1.0 is planned)
Direct dataset URL	https://github.com/SheikhGalib/CGPA-does-matter-dataset-ml-lab/tree/main/cleaned-dataset/ours/final
Access instructions	Access through the repository link; contact the corresponding student if the repository is private at the time of reading
Dataset license	CC BY 4.0 (proposed)
Code / notebook URL	https://github.com/SheikhGalib/CGPA-does-matter-dataset-ml-lab (notebooks/, report/build_report_assets.py)
Code version / commit / release	v1.0; commit 32ce1ce (15 September 2026)
README & environment	AGENTS.md (project README), docs/FINAL_WEKA_STEPS.md (WEKA guide); Python 3.14.5, pandas 3.0.5, NumPy 2.5.2, SciPy 1.18.1, matplotlib 3.11.1; WEKA 3.8.7

15. Student Contributions (CRedit-style)

Roll	Student	Overall Contribution (%)	Main contributions	Evidence / files owned
2107020	Sheikh Md. Galib Mahim	16.67	Data curation, software, formal analysis, visualization, writing – original draft	Merge and cleaning notebook, final data check, WEKA pipeline, report
2107030	Md. Eftakar Jaman Arfan	16.67	Investigation, validation, formal analysis	WEKA experiments and result tables
2107007	Asif Jawad	16.67	Conceptualization, methodology, investigation (data collection)	Form design and data collection
2107008	Rakibul Islam	16.67	Writing – review and editing; literature review	Report writing, related work
2107012	Md Enam E Elahi	16.67	Writing – review and editing; literature review	Report writing, related work
2107014	Al Mubtasim Preom	16.67	Data curation	Cleaning of the KUET form scheme

16. Acknowledgements, Funding and Competing Interests

16.1 Acknowledgements / Funding

We thank every student at KUET, BUET, BRAC University and CUET who answered the forms, and the classmates who shared the links. We thank the CSE 4112 course teachers for their guidance. This work received no external funding.

16.2 Declaration of Competing Interests

The authors declare no competing interests relevant to this dataset report.

17. References

- [1] Ahmed, study of student performance classification using K-means clustering with SVM, decision tree, naive Bayes and KNN, 2024, DOI: <https://doi.org/10.1155/2024/4067721>.
- [2] Maruf et al., machine-learning prediction of SSC and HSC results in Bangladesh with a stacking ensemble, Proc. ICCIT 2024, DOI: <https://doi.org/10.1109/ICCIT64611.2024.11021990>.
- [3] Albony and Duru, prediction of the average course grade of Bangladeshi secondary-school students with regression, tree, random forest and deep neural network models, International Journal of Engineering, Science and Technology (IJONFEST), 2026, URL: <https://dergipark.org.tr/tr/pub/ijonfest/article/1879280>.
- [4] P. Cortez and A. Silva, “Using data mining to predict secondary school student performance,” in Proc. 5th Future Business Technology Conference (FUBUTEC 2008), pp. 5–12, 2008. Dataset: UCI Machine Learning Repository, DOI: <https://doi.org/10.24432/C5TG7T>.
- [5] V. Realinho, J. Machado, L. Baptista and M. V. Martins, “Predicting student dropout and academic success,” Data, vol. 7, no. 11, art. 146, 2022, DOI: <https://doi.org/10.3390/data7110146>.
- [6] N. Yılmaz and B. Sekeroglu, “Student performance classification using artificial intelligence techniques,” in Proc. ICSCCW 2019, Springer, 2020, DOI: https://doi.org/10.1007/978-3-030-35249-3_76.
- [7] E. A. Amrieh, T. Hamtini and I. Aljarah, “Mining educational data to predict student’s academic performance using ensemble methods,” International Journal of Database Theory and Application, vol. 9, no. 8, pp. 119–136, 2016, DOI: <https://doi.org/10.14257/ijdta.2016.9.8.13>.
- [8] M. Hall, E. Frank, G. Holmes, B. Pfahringer, P. Reutemann and I. H. Witten, “The WEKA data mining software: an update,” SIGKDD Explorations, vol. 11, no. 1, pp. 10–18, 2009, DOI: <https://doi.org/10.1145/1656274.1656278>.
- [9] J. R. Quinlan, C4.5: Programs for Machine Learning. San Mateo, CA: Morgan Kaufmann, 1993.
- [10] L. Breiman, “Random forests,” Machine Learning, vol. 45, pp. 5–32, 2001, DOI: <https://doi.org/10.1023/A:1010933404324>.
- [11] J. C. Platt, “Fast training of support vector machines using sequential minimal optimization,” in Advances in Kernel Methods: Support Vector Learning, MIT Press, 1999, pp. 185–208.
- [12] S. le Cessie and J. C. van Houwelingen, “Ridge estimators in logistic regression,” Applied Statistics, vol. 41, no. 1, pp. 191–201, 1992, DOI: <https://doi.org/10.2307/2347628>.
- [13] G. H. John and P. Langley, “Estimating continuous distributions in Bayesian classifiers,” in Proc. 11th Conference on Uncertainty in Artificial Intelligence, pp. 338–345, 1995.
- [14] R. C. Holte, “Very simple classification rules perform well on most commonly used datasets,” Machine Learning, vol. 11, pp. 63–91, 1993, DOI: <https://doi.org/10.1023/A:1022631118932>.
- [15] Y. Benjamini and Y. Hochberg, “Controlling the false discovery rate: a practical and powerful approach to multiple testing,” Journal of the Royal Statistical Society B, vol. 57, no. 1, pp. 289–300, 1995, DOI: <https://doi.org/10.1111/j.2517-6161.1995.tb02031.x>.
- [16] A. W. Meade and S. B. Craig, “Identifying careless responses in survey data,” Psychological Methods, vol. 17, no. 3, pp. 437–455, 2012, DOI: <https://doi.org/10.1037/a0028085>.
- [17] J. Cohen, “A coefficient of agreement for nominal scales,” Educational and Psychological Measurement, vol. 20, no. 1, pp. 37–46, 1960, DOI: <https://doi.org/10.1177/001316446002000104>.
- [18] M. D. Wilkinson et al., “The FAIR Guiding Principles for scientific data management and stewardship,” Scientific Data, vol. 3, art. 160018, 2016, DOI: <https://doi.org/10.1038/sdata.2016.18>.

Appendix A. Complete Data Dictionary

Released ML files `final_920.csv` / `final_920.arff` contain the first 14 fields. `final_920_with_details.csv` adds the context fields and the answer text (one `_code` column per question). Answer codes are listed from 0 to 4.

Field	Question / meaning	Type	Codes (0 → 4) or values	Missing rule
Model inputs (in <code>final_920.csv</code> and <code>.arff</code>)				
<code>desired_department_match</code>	Got into desired subject or department	ordinal 0–4	Not at all what I wanted; Mostly different; Somewhat different; Close to what I wanted; Yes, exactly what I wanted	form median
<code>attendance</code>	How often present in class	ordinal 0–4	Less than 40%; 40–59%; 60–74%; 75–89%; 90% or more	form median
<code>weekly_study_time</code>	Self-study outside class per week	ordinal 0–4	Less than 3 hrs; 3–6 hrs; 7–10 hrs; 11–15 hrs; More than 15 hrs	form median
<code>study_style</code>	Study style that fits best	ordinal 0–4	Occasionally when necessary; Mostly just before exams; Regularly but not every day; Mostly consistent routine; Consistent throughout the semester	form median
<code>topic_clarity</code>	How much of the topic was clear after class	ordinal 0–4	Almost nothing; A little; About half; Most of it; Almost everything	form median
<code>sleep_duration</code>	Sleep on a normal night	ordinal 0–4	Less than 5 hrs; 5–6 hrs; 6–7 hrs; 7–8 hrs; More than 8 hrs	form median
<code>stress_frequency</code>	How often stress made studying difficult	ordinal 0–4	Never; Rarely; Sometimes; Often; Almost always	form median
<code>weekly_responsibilities</code>	Weekly hours on tuition, job, clubs, other duties	ordinal 0–4	None; 1–5 hrs; 6–10 hrs; 11–15 hrs; More than 15 hrs	blank = None
<code>distraction_frequency</code>	How often phone, gaming, social media or entertainment took study time	ordinal 0–4	Never; Rarely; Sometimes; Often; Almost every day	form median
<code>study_environment</code>	How study-friendly the living place was	ordinal 0–4	Very distracting; Somewhat distracting; Neither good nor bad; Mostly suitable; Excellent for focused study	form median
<code>support_level</code>	Support from family or close friends in hard times	ordinal 0–4	No support; Very little support; Some support; Good support; Strong support	form median
<code>routine_manageability</code>	How healthy and manageable the semester routine was	ordinal 0–4	Completely unmanageable; Difficult to manage; Average; Mostly manageable; Very healthy and balanced	form median
<code>recent_sgpa_band</code>	SGPA of the most recently completed semester, grouped	nominal	C0 below 3.20; C1 3.20–3.49; C2 3.50–3.74; C3 3.75 and above	row removed
<code>cgpa_band (class)</code>	CGPA, grouped (target)	nominal	C0 below 3.20; C1 3.20–3.49; C2 3.50–3.74; C3 3.75 and above	row removed
Context fields (in <code>final_920_with_details.csv</code>; not model inputs)				
<code>university</code>	University	nominal	KUET, BUET, BRAC, CUET	–
<code>department</code>	Department after name cleaning	nominal	24 values (Table 5); Unknown if blank or unclear	Unknown
<code>semester</code>	Current semester (university's own numbering)	integer	1–12	university median

Field	Question / meaning	Type	Codes (0 → 4) or values	Missing rule
source_form	Which form the row came from	nominal	kuet (Form B), multi_uni (Form A)	—
date	Submission date	date	2026-07-31 to 2026-09-03	—
gap	SGPA group — CGPA group	integer	0–3	—
aug67_group	Row belongs to the checked 6–7 Aug KUET semester-7 batch	boolean	True / False	—
<question> and <question>_code	Answer text and its code for each of the 12 questions	text / ordinal	as above	as above
Collected but not in the ML files (in merged_full_clean.csv)				
admission_satisfaction	Satisfaction with admission to the university	ordinal 0–4	Very dissatisfied; Dissatisfied; Neutral; Satisfied; Very satisfied	form median
career_expectation	Belief that the course leads to the dream career	ordinal 0–4	Not at all; Slightly; Somewhat; Mostly; Completely	form median
result_satisfaction	Satisfaction with the latest semester result (subjective; not used)	ordinal 0–4	Very dissatisfied; Dissatisfied; Neutral; Satisfied; Very satisfied	form median
timestamp, email	Submission time; e-mail (always empty)	—	—	dropped

Appendix B. Optional Supporting Material

- **Representative raw samples and screenshots of the collection interface:** Google Form and response-sheet screenshots in Section 6.3 (Figures 2–5); processed sample rows in Table 19 below.
- **Questionnaire:** the full question wording is in Table 8.
- **Labeling guideline:** Section 6.5 (fixed CGPA cut-points; no manual annotation).
- **Additional validation plots and tables:** Section 9 (SGPA–CGPA check) and the J48 trees in docs/figures/final/.
- **Environment and reproducibility notes:** Section 10.6 and docs/FINAL_WEKA_STEPS.md.
- **Ethics documentation:** not requested; see Section 13.

Table 19. Sample processed responses from final_920_with_details.csv (6 of 920 rows, selected columns).

Uni.	Dept.	Sem	Attendance	Self-study	Sleep	Stress	SGPA	CGPA
CUET	EEE	7	75-89%	More than 15 hrs	6-7 hrs	Rarely	C2	C2
BRAC	CSE	11	75-89%	3-6 hrs	7-8 hrs	Almost always	C1	C2
KUET	ECE	7	90% or more	3-6 hrs	6-7 hrs	Rarely	C2	C2
KUET	BECM	7	60-74%	7-10 hrs	5-6 hrs	Sometimes	C3	C2
KUET	CSE	1	90% or more	7-10 hrs	5-6 hrs	Sometimes	C2	C2
KUET	ME	7	60-74%	More than 15 hrs	5-6 hrs	Rarely	C2	C1

The first rows of the released WEKA file final_920.arff are:

```
@relation student_cgpa_final_920

@attribute desired_department_match numeric
@attribute attendance numeric
@attribute weekly_study_time numeric
@attribute study_style numeric
```

```

@attribute topic_clarity numeric
@attribute sleep_duration numeric
@attribute stress_frequency numeric
@attribute weekly_responsibilities numeric
@attribute distraction_frequency numeric
@attribute study_environment numeric
@attribute support_level numeric
@attribute routine_manageability numeric
@attribute recent_sgpa_band {C0,C1,C2,C3}
@attribute cgpa_band {C0,C1,C2,C3}

@data
4,3,4,2,2,2,1,2,2,2,3,3,C2,C2
4,3,3,1,3,2,2,3,2,2,2,3,C1,C1
4,3,4,3,3,1,1,2,1,3,3,3,C3,C2
4,2,3,2,2,1,1,3,2,1,3,2,C2,C1
...
```

Template basis: *Data in Brief data-article structure; Scientific Data Data Descriptor structure; MDPI Data Data Descriptor structure; plus CSE 4112-specific ML workflow and leakage-control requirements.*

Appendix C. Dataset Release and FAIR-Readiness Checklist

Yes/No column: ☒ marks the answer, following the FAIR principles [18].

Checklist item	Criterion	Yes/No	Evidence / note
Findable	Repository and persistent identifier/URL are provided; file/folder names are meaningful; metadata are searchable.	☒ / ☐	GitHub URL and meaningful names; DOI not yet assigned
Accessible	Access instructions work; restrictions are justified; files can be downloaded by the intended user.	☒ / ☐	Section 14; direct folder link
Interoperable	Common/open formats and standard units/labels are used where possible; schemas/codings are documented.	☒ / ☐	CSV, ARFF, JSON; codes in <code>answer_codes.csv</code> , Appendix A
Reusable	License is explicit; README, data dictionary, provenance, limitations and citation information are provided.	☒ / ☐	CC BY 4.0 (proposed); Sections 6.6, 7.2, 12
Raw + processed separation	Original observations are preserved separately from cleaned/derived data.	☒ / ☐	<code>raw-data/</code> vs <code>cleaned-dataset/</code>
Versioning	Dataset version/date and change history are recorded.	☒ / ☐	v1.0, 15 Sep 2026, commit 32ce1ce; cleaning log
Integrity	Duplicate/corruption/schema checks are complete; checksums are included where useful.	☒ / ☐	Scripted asserts, unique timestamps; checksums not yet published
Leakage safety	Related samples/subjects/augmentations do not cross ML data partitions.	☒ / ☐	One row per anonymous student; no augmentation; fixed rules (Section 8)
Reproducible processing	Code/notebook can reproduce processed data and baseline pipeline from the released inputs.	☒ / ☐	<code>final_weka_results.py</code> , notebook 02, WEKA logs
Ethics/privacy	Consent/approval/licensing/anonymization requirements are satisfied.	☒ / ☐	Anonymous voluntary survey; no formal board approval (Section 13)
Documentation	README explains files, variables, setup and reuse; captions/tables match the repository contents.	☒ / ☐	<code>AGENTS.md</code> , <code>FINAL_WEKA_STEPS.md</code> , this report
Team accountability	All six students' contributions are recorded.	☒ / ☐	Section 15