

TABLE OF CONTENTS

Contents	Pg.no
1 HTML.....	01-05
1.1 Simple form.....	01
1.2 Time Table.....	02
2 Javascript-01.....	06-13
2.1 Form Validation.....	06
2.2 Password Validation.....	11
3 Javascript-02.....	14-20
3.1 Accessories Order Form.....	14
4 Javascript-03.....	21-25
4.1 Change text color based on the selected radio button.....	21
4.2 Change the case of text.....	22
4.3 DOM example	24
5 Event Listeners.....	26-31
5.1 Add Event Listeners.....	26
5.2 Remove Event Listeners.....	27
5.3 Railway Reservation Form.....	28
6 XML,XSD and DTD.....	32-36
6.1 XML document to store information about students.....	32

6.2 XML schema for Student.....	33
6.3 DTD to store information on a catalog of cars.....	34
6.4 XML document for car catalog.....	35
7 CSS.....	37-48
7.1 Web page with 3 equally wide columns.....	37
7.2 Web page with varying width columns.....	41
7.3 Sticky header example.....	45
8 PHP-01.....	49-51
8.1 Store the Job Aspirant details in the database.....	49
8.2 Store login credentials in the database.....	50
9 PHP-02.....	52-59
9.1 Executing select query Displaying details in table format.....	52
9.2 Executing queries on cookie sales.....	53
9.3 Validating login credentials.....	55

LAB-01

HTML

1.1 Create an HTML page to illustrate the use of HTML tags. The page must contain Headings with different font sizes, an ordered list with at least 3 items, an image, 2 hyper links and 2 paragraphs.

- The page must have an appropriate background color.
- Paragraphs must have non-default font type and color.
- Image must be resized

```
<!DOCTYPE html>
<html lang="en">
<head>
<title>Exploring HTML Tags</title>
<style>
  body {
    background-color: #f5f5f5; /* Light gray background */
  }

  p {
    font-family: Arial, sans-serif; /* Non-default font */
    color: #333; /* Dark gray text */
  }

  img {
    width: 200px;
    height: 200px;
  }
</style>
</head>
```

```

<body>

  <h1>Exploring HTML - Big and Bold</h1>

  <h2>Learning with Examples - Slightly smaller</h2>

  <h3>Different Tags, Different Uses - Even smaller</h3>


  <p>This is a paragraph with a non-default font and color.</p>


  <ul>

    <li>Headings (h1, h2, h3...)</li>

    <li>Paragraphs (p)</li>

    <li>Lists (ordered and unordered)</li>

  </ul>


  <p>You can also add images, like this one:</p>

    <p>Here are some links to explore
further:</p>

  <a href="https://www.w3schools.com/html/">Learn more about HTML</a>

  <a href="https://www.tutorialspoint.com/html/">Another HTML tutorial</a>

</body>

</html>

```

1.2 Write HTML code to create a Time Table for your class.

```

<!DOCTYPE html>

<html>

  <head>

    <title>Class Timetable</title>

    <style>

      table {

        border-collapse: collapse;

```

```

        WIDTH:90%
    }
    th,td {
        padding:5px;
        border: 1px solid black;
        text-align: center;
    }
</style>
</head>
<body>
<table>
    <caption>Weekly Timetable</caption>
    <tr>
        <th>Days</th>
        <th>8:00 AM - 09:00 AM</th>
        <th>9:00 AM - 10:00 AM</th>
        <th>10:00 AM - 10:30 AM</th>
        <th>10:30 AM - 11:30 AM</th>
        <th>11:30 AM - 12:30 PM</th>
        <th>12:30 PM - 01:30 PM</th>
        <th>01:30 PM - 02:30 PM</th>
        <th>02:30 PM - 03:30 PM</th>
        <th>03:30 PM - 04:30 PM</th>
        <th>04:30 PM - 05:00 PM</th><BR>
    </tr>
    <tr>
        <td>Mon</td>
        <td>WP<BR>21UISC502</td>
        <td>STE<BR>21UAEE560</td>
        <td rowspan="6" style="background-color: rgb(159, 159, 159);">Break</td>

```

<td>SE 21UISC501</td>		
<td>MEPIP 21UHUC560</td>		
<td></td>		
<td rowspan="6" style="background-color: rgb(161, 160, 160);">Break</td>		
<td colspan="3">Internship 21UISL506(B1,B2)</td>		
</tr>		
<tr>		
<td>Tue</td>		
<td>MEPIP 21UHUC560</td>		
<td>WP 21UISC502</td>		
<td>DBMS 21UISC500</td>		
<td>SE 21UISC501</td>		
<td></td>		
<td colspan="3">DBMS LAB 21UISL503/WP LAB 21UISL504</td>		
</tr>		
<tr>		
<td>Wed</td>		
<td>ADS 21UISE510</td>		
<td>STE 21UAEE560</td>		
<td>SE 21UISC501</td>		
<td>WP 21UISC502</td>		
<td></td>		
<td colspan="3">Minor Project-1 21UISL505</td>		
</tr>		
<tr>		

```

<td>Thu</td>
<td>SE<BR> 21UISC501</td>
<td>ADS <BR>21UISE510</td>
<td colspan="2">DBMS LAB 21UISL503/WP LAB 21UISL504</td>
<td></td>
<td COLSPAN="3"></td>
</tr>
<tr>
<td>Fri</td>
<td colspan="2">DBMS LAB 21UISL503/WP LAB 21UISL504</td>
<td>ADS <BR>21UISE510</td>
<td>DBMS <br>21UISC500</td>
<td></td>
<td COLSPAN="3"></td>
</tr>
<tr>
<td>Sat</td>
<td>MEPIP<BR> 21UHUC560</td>
<td>DBMS <br>21UISC500</td>
<td colspan="3">DBMS LAB 21UISL503/WP LAB 21UISL504</td>
<td COLSPAN="3"></td>
</tr>
</table>
</body>
</html>

```

LAB 02

JAVASCRIPT-01

- 2.1 Create an HTML form to accept Name, Gender (radio button), Branch (dropdown box), CGPA (0.0 to 10.0), Email, Phone Number (10 digits only), Date-of-birth and a Message from a job aspirant. The form must be validated (except message all fields are compulsory and CGPA must be at least 7.0) using JavaScript code and also be properly aligned by applying CSS.

```
<HTML>

<HEAD>

  <TITLE>

    Job Aspirant form

  </TITLE>

  <style>

    form{

      margin:0 auto;

      width:400px;

      padding:1em;

      border:1px solid #ccc;

      border-radius: 1em;

    }

    label{

      display:inline-block;

      width:90px;

      text-align:right;

    }

    textarea{

      font:1em sans-serif;
```



```

    }
    button{
        margin-left:9em;
    }
</style>
</HEAD>
<BODY onload="return popUp()">
    <FORM id="form" onsubmit="return validateForm()" >

    <div>
        <label>Name</label>
        <input type="text" id="name" name="name" >
    </div>

    <div>
        <label>Gender</label>
        <input type="radio" id="gender1" name="user_gender" value="" >Male
        <input type="radio" id="gender2" name="user_gender" value="" >Female
    </div>

    <div>
        <label>Branch</label>
        <select id="branch" name="branch">
            <option value="-1">Select a Branch</option>
            <option value="1">CSE</option>
            <option value="2">ISE</option>
            <option value="3">AIML</option>
            <option value="4">ECE</option>
            <option value="5">EEE</option>
            <option value="6">CIVIL</option>

```

```
        <option value="7">MECH</option>
        <option value="8">CHEMICAL</option>
    </select>
</div>

<div>
    <label>CGPA</label>
    <input type="number" id="cgpa" name="cgpa" MIN="0.0" max="10.0"
value=""0.0">
</div>

<div>
    <label>Email</label>
    <input type="email" id="mail" name="user_mail">
</div>

<div>
    <label>Phone no</label>
    <input type="tel" id="ph_no" name="ph_no" pattern="[1-9]{1}[0-9]{9}">
</div>

<div>
    <label>Date of Birth</label>
    <input type="date" id="dob" name="dob">
</div>

<div>
    <label>Message</label>
    <textarea id="msg" name="user_message"></textarea>
</div>
```

```

        <div class="button">
            <button type="submit" value="submit">Send your message</button>
        </div>

    </FORM>

</BODY>

<script>
    function validateForm(){

        var name=document.getElementById('name').value;
        if(name==""){
            alert("You need to enter your name");
            return false;
        }

        var gender_sel=0;
        var my_form=document.getElementById("form");
        for(i=0;i<my_form.user_gender.length;i++){
            if(my_form.user_gender[i].checked)
                gender_sel++;
        }
        if(gender_sel==0){
            alert("You need to enter gender");
            return false;
        }
        var branch=document.getElementById("branch").value;
        if(branch<0){
            alert("You need to select your branch");
            return false;
        }
    }
}

```

```
}  
  
var cgpa=document.getElementById('cgpa').value;  
if(cgpa==""){  
    alert("You need to enter your cgpa");  
    return false;  
}  
  
var email=document.getElementById('mail').value;  
if(email==""){  
    alert("You need to enter your email");  
    return false;  
}  
  
var no=document.getElementById('ph_no').value;  
if(no==""){  
    alert("You need to enter your number");  
    return false;  
}  
  
var date=document.getElementById('dob').value;  
if(date==""){  
    alert("You need to enter your date of birth");  
    return false;  
}  
  
var msg=document.getElementById('msg').value;  
if(msg==""){  
    alert("please enter any message");  
    return false;  
}  
}
```

```
function popUp(){
    alert("Please enter all the details");
}
</script>
</HTML>
```

2.2 Create a form to accept password. Ask the user to re-enter the same password for confirmation. Validate the form using java script code. No field can be blank and both the passwords must be same.

- If an input field is blank alert the user and highlight the field.
- If the passwords do not match then alert the user, highlight the first field and select the password so that user can delete it one go and re-enter.

```
<html>
<head>
<title> Password Validation</title>
<style>
form {
margin: 0 auto;
width: 400px;
padding: 1em;
border: 1px solid #ccc;
border-radius: 1em;}
label{
display: inline-block;
width: 90px;
text-align: right}
button{
```

```
margin-left: 9em}

</style>

</head>

<body>

<form id="pass" onsubmit="return validatePassword()">

<div>

<label> Enter your password </label>

<input type="password" id="passwd1" name="passwd1">

</div>

<div>

<label> Re-enter your password </label>

<input type="password" id="passwd2" name="passwd2">

</div>

<br>

<div class="button">

<button type="submit"> Set the password </button>

</div>

</form>

<script>

function validatePassword(){

var p1 = document.getElementById("passwd1");

var p2 = document.getElementById("passwd2");

if (p1.value == ""){

alert ("Password cant be blank");

p1.focus();

return false;

}

if (p2.value==""){

alert("Password cant be blank");

p2.focus();

}
```

```
return false;
}
if (p1.value!=p2.value){
alert("Passwords must be same");
p1.focus();
p1.select();
return false;
}
}
</script>
</body>
</html>
```

LAB 03

JAVASCRIPT-02

3.1 Create an HTML form as given in Fig 3.1 to accept order from customers. Based on the value entered for Quantity Total Cost (including Shipping Charges) must be displayed. Items must be shipped for free if the customer orders products worth Rs.1,000/ at least otherwise the shipping charges must be 15% of the order amount. Note: 1. Validation must be done for Payment Mode (one option MUST be selected) 2. Input field next to Total Cost button cannot be blank and should not be editable manually

Accessories Order Form

Product Name	Price	Quantity
Ethernet Cable (2 m.)	Rs.150	
Router	Rs.3000	
Adapter	Rs.280	

Total Cost (incl. Shipping Charges)

Payment Mode

☐ Debit/Credit Cards
☐ UPI (PhonePe/GooglePay/BHIM)
☐ Net Banking
☐ Cash on Delivery

Shipping Address

Customer Full Name
Locality
City
State
PIN

Billing Address

☐ Same as shipping address

Customer Full Name
Locality
City
State
PIN

Fig 3.1

```
<html>
<head>
<title> Accessories order form</title>
<style>
input[type = "number"]{
width: 50px
}
table {
width: 65%;
```



```

border-collapse: collapse
}
td, th{
text-align: center;
font-family: serif;
border: 1px solid black;
}
label{
display: inline-block;
width: 150px;
text-align:right
}
</style>
</head>
<body>
<center>
<h2 style="background-color: Medium Purple">Accesories Order Form </h2>
</center>
<form id="orderform" onsubmit="return validateForm()">
<table>
  <tr>
    <th>Product name</th>
    <th>Price</th>
    <th>Quantity</th>
  </tr>
  <tr>
    <th> Ethernet cable (2m) </th>
    <td> Rs. 150 </td>
    <td><input type="number" id="qty1" value="0" min="0"></td>
  </tr>

```

```

<tr>
  <th> Router </th>
  <td> Rs. 3000</td>
  <td><input type="number" id="qty2" value="0" min="0"></td>
</tr>
<tr>
  <th> Adapter </th>
  <td>Rs. 280</td>
  <td><input type="number" id="qty3" value="0" min="0"></td>
</tr>
</table>
<br>
<button type="button" id="b1" onclick="calcCost()"> Totalcost (incl shipping charges)
</button>
<input type="text" id="totalcost" style="width: 75px" readonly>
<br>
<h4> Payment mode </h4>
<input type="radio" id="db" name="paymode"> Debit/Credit card
<br>
<input type="radio" id="upi" name = "paymode"> Phone pay/Google pay/BHIM
<br>
<input type="radio" id="nb" name="paymode"> Net Banking
<br>
<input type="radio" id="cod" name= "paymode"> Cash On Delivery
<br>
<h4> Shipping address </h4>
<label> Customer full name </label>
<input type="text" id="name1">
<br>
<label> Locality </label>
<input type="text" id="locality1">

```

```
<br>
<label> city </label>
<input type="text" id="city1">
<br>
<label>State </label>
<select id="state1" name="state1">
  <option value="-1"> Select your state </option>
  <option value="1"> Karnataka </option>
  <option value="2">Maharashtra </option>
  <option value="3"> Andhra Pradesh </option>
  <option value="4"> Telangana </option>
  <option value="5">Kerala <caption>
  <option value="6"> Tamil Nadu <caption>
  <option value="1"> Gujarat </option>
</select>
<br>
<label> Pin </label>
<input type="text" id="pin1" pattern="[0-9]{6}">
<br>
<h4> Billing address </h4>
<input type="checkbox" id="sameAddr" onchange="setBillAddr(this)">Same as shipping
address
<br>
<label> Customer full name </label>
<input type="text" id="name2">
<br>
<label> Locality </label>
<input type="text" id="locality2">
<br>
<label> city </label>
<input type="text" id="city2">
```

```
<br>
<label>State </label>
<select id="state2" name="state2">
  <option value="-1"> Select your state </option>
  <option value="1"> Karnataka </option>
  <option value="2">Maharashtra </option>
  <option value="3"> Andhra Pradesh </option>
  <option value="4"> Telangana </option>
  <option value="5">Kerala <caption>
  <option value="6"> Tamil Nadu <caption>
  <option value="1"> Gujarat </option>
</select>
<br>
<label> Pin </label>
<input type="text" id="pin2" pattern="[0-9]{6}">
<br>
<br>
<button type="submit" value="submit" id="b2">Submit you order </button>
<button type="reset" value="reset" id="b3"> Clear your order form </button>
</form>
</body>
<script>
  function calcCost(){
    var q1= document.getElementById('qty1');
    var q2= document.getElementById('qty2');
    var q3= document.getElementById('qty3');
    if(q1.value==0 && q2.value==0 && q3.value==0){
      alert("You need to select atleast one item");
      return false;
    }
  }
```

```

var tCost=150*q1.value +3000*q2.value+ 280*q3.value;
if (tCost<1000)
    tCost = 0.15*tCost +tCost;
document.getElementById('totalcost').value=tCost;
}

```

```

function validateForm(){
    var of=document.getElementById('orderform');
    var sel=0;
    for(var i=0; i<orderform.paymode.length; i++){
        if(orderform.paymode[i].checked)
            sel++;
    }
    if (sel==0){
        alert("You need to select the payment mode");
        return false;
    }
}

```

```

function setBillAddr(c){
    var n1= document.getElementById('name1').value;
    var l1= document.getElementById('locality1').value;
    var c1= document.getElementById('city1').value;
    var s1= document.getElementById('state1').value;
    var p1= document.getElementById('pin1').value;
    var n2= document.getElementById('name2');
    var l2= document.getElementById('locality2');
    var c2= document.getElementById('city2');
    var s2= document.getElementById('state2');
    var p2= document.getElementById('pin2');


```

```
if (c.checked){  
    n2.value=n1;  
    l2.value=l1;  
    c2.value=c1;  
    s2.value=s1;  
    p2.value=p1;  
}  
else{  
    n2.value="";  
    l2.value="";  
    c2.value="";  
    s2.value="";  
    p2.value="";  
}  
}  
</script>  
</html>
```

LAB 04

JAVASCRIPT-03

4.1 Write HTML and JavaScript code to change the text color on selecting a radio button as in Fig 1.1

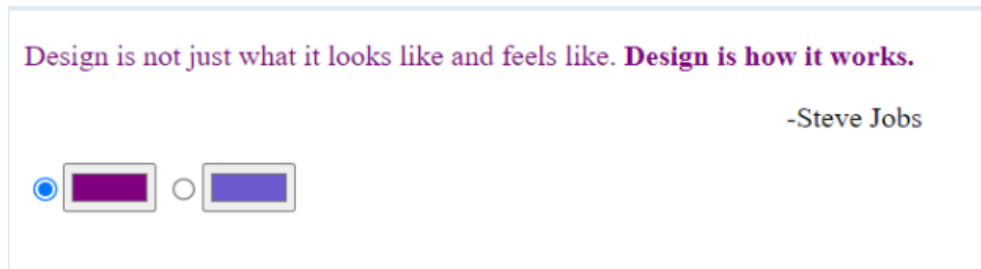

```
<html>
  <head>
    <title>Change text color</title>
  </head>
  <body>
    <p id="qt">Learning never exhausts the mind</p>
    <input type="radio" id="c1" name="qtclr" value="#800080"
onclick="colorQuote()">
    <input type="color" value="#800080">
    <input type="radio" id="c2" name="qtclr" value="#800000"
onclick="colorQuote()">
    <input type="color" value="#800000">
  </body>
  <script>
    function colorQuote(){
      var qt=document.getElementById('qt');
      var clr=document.getElementsByName('qtclr');
      for(i=0;i<clr.length;i++)
        if(clr[i].checked)
```

```

        qt.style.color=clrs[i].value;
    }

</script>
</html>

```

4.2 Write HTML and JavaScript code to create a page as in Fig.2.1. On providing input text and selecting one of the radio buttons, the text-case must be converted appropriately and displayed in the Result Text field.

Input Text

Result Text

☐ Lower Case ☐ Upper Case

```

<html>
<head>
<title>Case-Conversion</title>
<style>
label{
text-align:right;
display:inline-block;
width:40px;
}
</style>
</head>
<body>

```



```
<form action="/entity-that-handles-form-data/" method="post">
<div>
<label>Input Text</label>
<input type="text" id="ip" name="ip">
</div>
<div>
<label>Result text</label>
<input type="text" id="res" name="res">
</div>
<div>
<input type="radio" onclick="convertfn()" id="lc" name="case">LowerCase<br>
<input type="radio" onclick="convertfn()" id="uc" name="case">UpperCase<br>
</div>
<button type="reset" value="Reset">Reset</button>
</form>
<script>
function convertfn()
{
var ip=document.getElementById("ip").value;
if(document.getElementById("lc").checked)
{
ip=ip.toLowerCase();
}
if(document.getElementById("uc").checked)
{
ip=ip.toUpperCase();
}
document.getElementById("res").value=ip;
}
</script>
```

```
</body>
```

```
</html>
```

4.3 Write code to demonstrate the creation of a dynamic list using DOM methods.

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
  <title>Wishlist Places</title>
```

```
</head>
```

```
<body>
```

```
  <button type="button" onclick="addPlace()">Add Place to Wishlist</button>
```

```
  <input type="text" id="placeInput">
```

```
  <h3 id="head">The Must Visit Places</h3>
```

```
  <ul id="list1">
```

```
    <li id="l1">Dehradun</li>
```

```
    <li>Gir Forest</li>
```

```
  </ul>
```

```
</body>
```

```
<script>
```

```
  function addPlace(){
```

```
    var userPlace=document.getElementById('placeInput').value; //read value
```

```
    const place=document.createTextNode(userPlace);           //create node
```

```
    const listEle=document.createElement("li");               //insert value to node
```

```
    listEle.appendChild(place);                                //connect it to its parent
```

```
//document.getElementById('list1').appendChild(listEle);  
// document.getElementsByTagName("ul")[0].appendChild(listEle);  
document.getElementsByTagName("li")[0].parentNode.appendChild(listEle);  
document.getElementsByTagName("li").item(0).parentNode.appendChild(listEle);  
  
var heading=document.getElementsByTagName("h3")[0];  
//var heading=document.querySelector("h3");  
heading.childNodes[0].data="Dynamic list of must visit places" ;  
//document.getElementById('head').innerHTML="Dynamic list of must visit places";  
//document.getElementById('l1').innerHTML="Kolkata";  
var l1=document.getElementsByTagName("li")[0];  
l1.childNodes[0].data="Kolkata";  
}  
</script>  
</html>
```

LAB 05

EVENT LISTENERS

5.1 Write HTML and JavaScript code to demonstrate adding event listeners to 2 different HTML elements to handle at least 2 mouse events each. Note :

- Button element with a question as text:
 - When the mouse pointer enters the element answer should be displayed.
 - When the mouse pointer moves out the question should be back in place.
- Text element (p):
 - *When the mouse is pressed over text it should be displayed in red.*
 - *When the mouse is release text must change to blue color.*

```
<html>
<head>
<title>Event-handler</title></head>
<body>
<button type="button" id="btn">What's your name?</button>
<p id="p1">This is a girl</p>
<script>
document.getElementById("btn").addEventListener("mouseover",ansfn);
document.getElementById("btn").addEventListener("mouseout",quesfn);
document.getElementById("p1").addEventListener("mouseup",turnred);
document.getElementById("p1").addEventListener("mousedown",turnblue);
function ansfn()
{
document.getElementById("btn").innerHTML="Nandini";
}
```

```
function quesfn()
{
document.getElementById("btn").innerHTML="What's your name?";
}
function turnred()
{
var qt=document.getElementById("p1");
qt.style.color="red";
}
function turnblue()
{
var qt=document.getElementById("p1");
qt.style.color="blue";
}
</script>
</body>
</html>
```

5.2 Write code to demonstrate the removal of an event listener. (You should not modify in the above code. New code must be written.)

```
<html>
<head>
<title>Remove-Event</title>
<style>
#div1 {
background-color:powderblue;
padding:16px;
}
</style>
```

```

</head>

<body>

<h2>The remove-event-handler</h2>

<div id="div1">This bluish element has an onmousemove handler that displays the
date and time on hovering the mouse here.

<button type="button" id="btn">Remove</button></div>

<p id="p1"></p>

<script>

document.getElementById("div1").addEventListener("mousemove",showdate);
document.getElementById("btn").addEventListener("click",removedate);

function showdate()
{
document.getElementById("p1").innerHTML=Date();
}

function removedate()
{
document.getElementById("div1").removeEventListener("mousemove",showdate);
document.getElementById("p1").innerHTML="";
}

</script>

</body>

</html>

```

5.3 Write HTML and javascript to add rows, on clicking a button, to a railway passenger details table. Each row must have input fields to accept Name, Age and Berth Preference[Lower, Middle, Upper].

```

<html>

<head>

<title>Passenger-Table</title>

```

```

<style>
form{
margin:0 auto;
width:900px;
padding:1em;
border:1px solid black;
border-radius:1em;
}
table{
border-collapse:collapse;
border:1px solid black;
}
td,th{
font-family:Arial;
text-align:center;
border:1px solid black;
}
</style>
<body>
<form action="/entity-that-handles-form-data/" method="post">
<button type="button" id="btn1">Add rows</button>
<table id="tab">
<tr>
<th>Name</th>
<th>Gender</th>
<th>Berth</th>
</tr>
<tr>
<td><input type="text" id="name" name="name"></td>
<td><input type="text" id="gender" name="gender"></td>

```

```

<td><select id="berth" name="b1">
<option value="-1">Select a berth</option>
<option value="1">Lower</option>
<option value="2">Middle</option>
<option value="3">Upper</option>
</select></td></tr>

</table>

<button type="submit" id="btn2" onclick="return validate()">Submit</button>

<script>
var tab=document.getElementById("tab");
document.getElementById("btn1").addEventListener("click",addrows);
function addrows()
{
var rcnt=tab.rows.length;
var row=tab.insertRow(rcnt);
if(rcnt>7)
{
alert("You can enter upto 7 details only");
return false;
}
else
{
for(i=0;i<tab.rows[1].cells.length;i++)
{
var cell=row.insertCell(i);
cell.innerHTML=tab.rows[1].cells[i].innerHTML;
}
}
}

function validate()

```



```
{  
var rcnt=tab.rows.length-1;  
if(rcnt>=3 && rcnt<=7)  
{  
alert("Thank you "+name+"for submitting the form");  
return false;  
}  
if(rcnt<3)  
{  
alert("You have to enter minimum 3 details");  
return false;  
}  
}  
</script>  
</form>  
</body>  
</html>
```

LAB 06

XML, XSD AND DTD

- 6.1 Design an XML document to store information about students in a college. Information about students must include firstName, homeAddress (locality, city, pin, country), phoneNumber, courseEnrolled (title, code, marksScored, passed).

Note:

- Each student can enroll in at most 3 courses. Every student will have USN as an attribute.
- PhoneNumber must be exactly 10 digits in length.
- marksScored should not be negative and can't exceed 100.

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<student usn="2SD24IS004" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:noNamespaceSchemaLocation="student.xsd">
```

```
  <fullName>Ambhrini S.</fullName>
```

```
  <homeAddress>
```

```
    <locality>Kuvempu Nagara</locality>
```

```
    <city>Mysore</city>
```

```
    <pin>570001</pin>
```

```
    <country>India</country>
```

```
  </homeAddress>
```

```
  <phoneNumber>8073722603</phoneNumber>
```

```
  <courseEnrolled>
```

```
    <title>Theory of Computation</title>
```

```
    <code>21UISC404</code>
```

```
    <marksScored>74</marksScored>
```

```
    <passed>true</passed>
```

```
  </courseEnrolled>
```

```
</courseEnrolled>
```

```
<title>OOP</title>
<code>21UISC402</code>
<marksScored>86</marksScored>
<passed>true</passed>
</courseEnrolled>
</student>
```

- 6.2 Create an XML schema for the XML document described in Q1. Validate the XML document against the XSD. Also demonstrate the features of XSD by making temporary changes in the XML.

```
<?xml version="1.0" encoding="UTF-8" ?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <xsd:element name="student">
    <xsd:complexType>
      <xsd:sequence>
        <xsd:element name="fullName" type="xsd:string"/>
        <xsd:element name="homeAddress">
          <xsd:complexType>
            <xsd:sequence>
              <xsd:element name="locality" type="xsd:string"/>
              <xsd:element name="city" type="xsd:string"/>
              <xsd:element name="pin" type="xsd:integer"/>
              <xsd:element name="country" type="xsd:string"/>
            </xsd:sequence>
          </xsd:complexType>
        </xsd:element>
        <xsd:element name="phoneNumber" type="xsd:string"/>
      </xsd:sequence>
    </xsd:complexType>
  </xsd:element>

```

```

<xsd:element name="courseEnrolled" maxOccurs="3">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element name="title" type="xsd:string"/>
      <xsd:element name="code" type="xsd:string"/>
      <xsd:element name="marksScored" type="xsd:integer"/>
      <xsd:element name="passed" type="xsd:boolean"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
</xsd:sequence>
<xsd:attribute name="usn" type="xsd:string" use="required"/>
</xsd:complexType>
</xsd:element>
</xsd:schema>

```

6.3 Create a DTD to store information on a catalog of cars.

```

<!ELEMENT car_catalog (Car+)>
<!ELEMENT Car (make, model, year, color, engine, no_of_doors, trans_type,
accessories)>
<!ELEMENT make (#PCDATA)>
<!ELEMENT model (#PCDATA)>
<!ELEMENT year (#PCDATA)>
<!ELEMENT color (#PCDATA)>
<!ELEMENT no_of_doors (#PCDATA)>
<!ELEMENT trans_type (#PCDATA)>
<!ELEMENT accessories (#PCDATA)>

```

```

<!ATTLIST accessories radio CDATA #REQUIRED>
<!ATTLIST accessories air_conditioning CDATA #REQUIRED>
<!ATTLIST accessories power_windows CDATA #REQUIRED>
<!ATTLIST accessories power_steering CDATA #REQUIRED>
<!ATTLIST accessories power_brakes CDATA #REQUIRED>
<!ELEMENT engine (no_of_cyl, fuel_sys)>
<!ELEMENT no_of_cyl (#PCDATA)>
<!ELEMENT fuel_sys (#PCDATA)>
<!ENTITY t "Toyota">
<!ENTITY l "Lamborghini">

```

6.4 . Create an XML document with at least 2 instances of the car element described in Q3. Display the raw XML document.

```

<?xml version="1.0"?>
<!DOCTYPE car_catalog SYSTEM "cars.dtd">
<car_catalog>
  <Car>
    <make> &t; </make>
    <model>Portuner</model>
    <year>2015</year>
    <color>black</color>
    <engine>
      <no_of_cyl>2</no_of_cyl>
      <fuel_sys>PEMT</fuel_sys>
    </engine>
    <no_of_doors>4doors</no_of_doors>
    <trans_type>Fuel injected</trans_type>
  </Car>
  <Car>
    <make> &l; </make>
    <model>Lamborghini</model>
    <year>2016</year>
    <color>red</color>
    <engine>
      <no_of_cyl>6</no_of_cyl>
      <fuel_sys>PEMT</fuel_sys>
    </engine>
    <no_of_doors>2doors</no_of_doors>
    <trans_type>Automatic</trans_type>
  </Car>
</car_catalog>

```

```
<accessories  radio="yes"  air_conditioning="yes"  power_windows="yes"
power_steering="yes" power_brakes="yes" />
</Car>
<Car>
  <make> &l; </make>
  <model>Portuner</model>
  <year>2012</year>
  <color>black</color>
  <engine>
    <no_of_cyl>2</no_of_cyl>
    <fuel_sys>FEMT</fuel_sys>
  </engine>
  <no_of_doors>4doors</no_of_doors>
  <trans_type>Fuelinjected</trans_type>
  <accessories  radio="yes"  air_conditioning="yes"  power_windows="yes"
power_steering="yes" power_brakes="yes" />
</Car>
</car_catalog>
```

LAB 07

CSS

7.1 Design a web page with 3 equally -wide columns a header and a footer as in fig. Navigation bar must be distinguishable from cut of the page, and on hovering a link its background must change. The page must be responsive on all kinds of devices. i. e, on resizing the browser window the columns must be stacked upon each other

```
<html>

<head>

  <title>CSS layouts examples</title>

  <style>

    *{

      box-sizing:border-box;

    }

    body{

      margin:0

    }

/* Style the header */

.header {

padding: 20px;

text-align: center;

}

/* Style the top navigation bar */

.topnav {

  overflow: hidden;

background-color: #333;

}

/*Style the topnav links*/

.topnav a{float:left;

color:white;
```

```

text-align:center;
padding :14px 16px;
text-decoration: none;}
/*Change color on hover*/
.topnav a:hover{
    background-color:bisque;
    color:black;
}
/*create three equal columns that floats next to each*/
.column{
    float:left;
    width:33.33%;
    padding:15px;
    /* font-size: large; */
}
/*clear floats after the columns*/
.row::after{
    content:"";
    display:block;
    clear:both;
}
/* Style the footer */
.footer {
background-color:#333;
color:white;
padding: 10px;
font-size:120%;
text-align: center;
}
@media screen and (max-width:600px){

```



```

        .column{
            width:100%;
        }
    }

</style>
</head>
<body>
    <h2 CLASS="header">CMS tools</h2>
    <div class="topnav">
        <a href="#">WordPress</a>
        <a href="#">Joomla</a>
        <a href="#">Drupal</a>
    </div>
    <div class="row">
        <div class="column">
            <h2>WordPress</h2>

```

<p>WordPress is an open-source content management system (CMS) that makes it easy to create and manage a website. It is the most popular CMS in the world. Millions of business owners, bloggers, and publishers use WordPress every day to maintain their online presence. An "open-source content management system written in PHP" may sound complicated, but really isn't. Think of WordPress open-source management as a piece of software that's built just to make it easy to create and edit your own websites. To get started, you log into your dashboard, and from there you can create new pages, make blog posts, update your website's visual appearance, and more.

The main advantage of using the WordPress platform is that you don't need any coding skills to put your content online. WordPress uses a database to store and organize all of your data, from the content in your posts and pages to your user accounts and site URLs. It does all of the work for you. This is what makes it such a fast, powerful tool for publishing online.

When it comes to creating a new page on your site or a blog post, there's little difference between the WordPress content editor and your typical desktop word processor. Type your text, add images, click "publish" and WordPress generates the HTML needed for your content to appear online.</p>

```

    </div>

```

<div class="column">

<h2>Joomla</h2>

<p>Joomla! is a free and open-source content management system (CMS) for publishing web content. Over the years Joomla! has won several awards. It is built on a model–view–controller web application framework that can be used independently of the CMS that allows you to build powerful online applications. Joomla! is one of the most popular website softwares, thanks to its global community of developers and volunteers, who make sure the platform is user friendly, extendable, multilingual, accessible, responsive, search engine optimized and so much more. The definition of a CMS is an application (web-based), that provides capabilities for multiple users with different permission levels to manage (all or a section of) content, data or information of a website project, or intranet application.</p>

Managing content refers to creating, editing, archiving, publishing, collaborating on, reporting, distributing website content, data and information.

Some companies and organisations have requirements that go beyond what is available in the Joomla! Core package. In those cases, Joomla's powerful application framework makes it easy for developers to create sophisticated add-ons that extend the power of Joomla into virtually unlimited directions.</p>

</div>

<div class="column">

<h2>Drupal</h2>

<p>Drupal is a free, open source content management system (CMS) to build and maintain websites, online directories, e-commerce stores, intranets and other types of digital content. It can be used by individuals or groups of users and is a useful CMS for developers, marketers and agencies. Basically, anyone looking to structure and manage their digital content can benefit from Drupal's tools and workflows.</p>

Drupal is a popular and customizable content management framework. This makes it suitable for developing both simple websites and complex web applications. It includes thousands of modules and themes to attract web audiences, grow brand awareness and build a community.

The CMS provides an intuitive, fairly straightforward user interface (UI) to easily create and publish digital content. It accommodates unlimited content types and simple tools to create, edit, retrieve and present this content to end users. In addition, Drupal features a sophisticated user role classification and permissions system to control access to its features and content.</p>

</div>

</div>

<div class="footer">

<p>© Created by : ISE-2025</p>

```
</div>

</body>
</html>
```

7.2 Modify the previous webpage to have a varying width columns(25%,50%,25%)

```
<html>
<head>
  <title>CSS layouts examples</title>
  <style>
    *{
      box-sizing:border-box;
    }
    body{
      margin:0
    }

/* Style the header */
.header {
padding: 20px;
text-align: center;
}

/* Style the top navigation bar */
.topnav {
  overflow: hidden;
background-color: #333;
}

/*Style the topnav links*/
.topnav a{float:left;
```

```

color:white;
text-align:center;
padding :14px 16px;
text-decoration: none;}
/*Change color on hover*/
.topnav a:hover{
    background-color:bisque;
    color:black;
}
/*create three equal columns that floats next to each*/
.column{
    float:left;
    padding:15px;
    /* font-size: large; */
}
side{
Width:25%;
}
middle{
width:50%;
}
/*clear floats after the columns*/
.row::after{
    content:"";
    display:block;
    clear:both;
}
/* Style the footer */
.footer {
background-color:#333;

```

```

color:white;
padding: 10px;
font-size:120%;
text-align: center;
}
@media screen and (max-width:600px){
    .column{
        width:100%;
    }
}

</style>
</head>
<body>
    <h2 CLASS="header">CMS tools</h2>
    <div class="topnav">
        <a href="#">WordPress</a>
        <a href="#">Joomla</a>
        <a href="#">Drupal</a>
    </div>
    <div class="row">
        <div class="column side">
            <h2>WordPress</h2>

```

WordPress is an open-source content management system (CMS) that makes it easy to create and manage a website. It is the most popular CMS in the world. Millions of business owners, bloggers, and publishers use WordPress every day to maintain their online presence. An "open-source content management system written in PHP" may sound complicated, but really isn't. Think of WordPress open-source management as a piece of software that's built just to make it easy to create and edit your own websites. To get started, you log into your dashboard, and from there you can create new pages, make blog posts, update your website's visual appearance, and more.

The main advantage of using the WordPress platform is that you don't need any coding skills to put your content online. WordPress uses a database to store and organize all of your data, from the content in your posts and pages to your user accounts and site URLs. It

does all of the work for you. This is what makes it such a fast, powerful tool for publishing online.

When it comes to creating a new page on your site or a blog post, there's little difference between the WordPress content editor and your typical desktop word processor. Type your text, add images, click "publish" and WordPress generates the HTML needed for your content to appear online.</p>

</div>

<div class="column middle">

<h2>Joomla</h2>

<p>Joomla! is a free and open-source content management system (CMS) for publishing web content. Over the years Joomla! has won several awards. It is built on a model–view–controller web application framework that can be used independently of the CMS that allows you to build powerful online applications. Joomla! is one of the most popular website softwares, thanks to its global community of developers and volunteers, who make sure the platform is user friendly, extendable, multilingual, accessible, responsive, search engine optimized and so much more. The definition of a CMS is an application (web-based), that provides capabilities for multiple users with different permission levels to manage (all or a section of) content, data or information of a website project, or intranet application.

Managing content refers to creating, editing, archiving, publishing, collaborating on, reporting, distributing website content, data and information.

Some companies and organisations have requirements that go beyond what is available in the Joomla! Core package. In those cases, Joomla's powerful application framework makes it easy for developers to create sophisticated add-ons that extend the power of Joomla into virtually unlimited directions.</p>

</div>

<div class="column side">

<h2>Drupal</h2>

<p>Drupal is a free, open source content management system (CMS) to build and maintain websites, online directories, e-commerce stores, intranets and other types of digital content. It can be used by individuals or groups of users and is a useful CMS for developers, marketers and agencies. Basically, anyone looking to structure and manage their digital content can benefit from Drupal's tools and workflows.

Drupal is a popular and customizable content management framework. This makes it suitable for developing both simple websites and complex web applications. It includes thousands of modules and themes to attract web audiences, grow brand awareness and build a community.

The CMS provides an intuitive, fairly straightforward user interface (UI) to easily create and publish digital content. It accommodates unlimited content types and simple tools to create, edit, retrieve and present this content to end users. In addition, Drupal features a

sophisticated user role classification and permissions system to control access to its features and content.</p>

</div>

</div>

<div class="footer">

<p>#169 Created by : ISE-2025</p>

</div>

</body>

</html>

7.3 Write code to create a web page with sticky header .On scrolling the page up to the top, the sticky effect must be removed.

<html>

<head>

<title>Sticky-Header</title>

</head>

<style>

.header1 {

background-color:black;

color:white;

padding:10px 16px;

text-align:center;

width:100%}

.header2 {

background-color:pink;

color:black;

padding:10px 16px;

```

text-align:center;
width:100%}
.content{
padding:10px;
font-size:20px;
}
.sticky{
position:fixed;
top:0;
}
</style>
<body>
<div class="header1" id="head1">
<h1>Classic Tales</h1>
</div>
<div class="header2" id="head2">
<h1>Alice in Wonderland</h1>
</div>
<div class="content">
<h2>Chapter 1:Down the Rabbit-Hole</h2>
<p>Alice was beginning to get very tired of sitting by her sister on the bank, and of having
nothing
to do: once or twice she had peeped into the book her sister was reading, but it had no pictures
or
conversations in it, `and what is the use of a book,' thought Alice `without pictures or
conversation?' So she was considering in her own mind (as well as she could, for the hot day
made her feel very sleepy and stupid), whether the pleasure of making a daisy-chain would be
worth the trouble of getting up and picking the daisies, when suddenly a White Rabbit with
pink
eyes ran close by her. There was nothing so very remarkable in that; nor did Alice think it so
very much out of the way to hear the Rabbit say to itself, `Oh dear! Oh dear! I shall be late!'

```


(when she thought it over afterwards, it occurred to her that she ought to have wondered at this, but at the time it all seemed quite natural); but when the Rabbit actually took a watch out of its waistcoat-pocket, and looked at it, and then hurried on, Alice started to her feet, for it flashed across her mind that she had never before seen a rabbit with either a waistcoat-pocket, or a watch

to take out of it, and burning with curiosity, she ran across the field after it, and fortunately was just in time to see it pop down a large rabbit-hole under the hedge.</p>

<p>In another moment down went Alice after it, never once considering how in the world she was to

get out again. The rabbit-hole went straight on like a tunnel for some way, and then dipped suddenly down, so suddenly that Alice had not a moment to think about stopping herself before she found herself falling down a very deep well. Either the well was very deep, or she fell very slowly, for she had plenty of time as she went down to look about her and to wonder what was going to happen next. First, she tried to look down and make out what she was coming to, but it

was too dark to see anything; then she looked at the sides of the well, and noticed that they were

filled with cupboards and book-shelves; here and there she saw maps and pictures hung upon pegs. She took down a jar from one of the shelves as she passed; it was labelled 'ORANGE MARMALADE', but to her great disappointment it was empty: she did not like to drop the jar for fear of killing somebody, so managed to put it into one of the cupboards as she fell past it.

'Well!' thought Alice to herself, 'after such a fall as this, I shall think nothing of tumbling down stairs! How brave they'll all think me at home! Why, I wouldn't say anything about it, even if I fell off the top of the house!' (Which was very likely true.) Down, down, down. Would the fall never come to an end! 'I wonder how many miles I've fallen by this time?' she said aloud. 'I must be getting somewhere near the centre of the earth. Let me see: that would be four thousand miles down, I think--' (for, you see, Alice had learnt several things of this sort in her lessons in the schoolroom, and though this was not a very good opportunity for showing off her knowledge,

as there was no one to listen to her, still it was good practice to say it over) '--yes, that's about the

right distance--but then I wonder what Latitude or Longitude I've got to?' (Alice had no idea

what Latitude was, or Longitude either, but thought they were nice grand words to say.)</p>
<p>Presently she began again. 'I wonder if I shall fall right through the earth! How funny it'll seem
to come out among the people that walk with their heads downward! The Antipathies, I think-
'
(she was rather glad there was no one listening, this time, as it didn't sound at all the right word)
'--but I shall have to ask them what the name of the country is, you know. Please, Ma'am, is this
New Zealand or Australia?' (and she tried to curtsey as she spoke--fancy curtseying as you're
falling through the air! Do you think you could manage it?) 'And what an ignorant little girl
she'll think me for asking! No, it'll never do to ask: perhaps I shall see it written up
somewhere.'</p>

</div>

<script>

```
window.addEventListener("scroll",fixHeader);  
var head1=document.getElementById("head1");  
var sticky1=head1.offsetTop;  
function fixHeader()  
{  
    if(window.pageYOffset>sticky1)  
    {  
        head1.classList.add("sticky");  
    }  
    else  
    {  
        head1.classList.remove("sticky");  
    }  
}  
</script>  
</body>  
</html>
```

LAB 08

PHP-01

8.1 Write a PHP script to accept the data provided through HTML form created in Lab2 (Q1) and Store it in a table called job_aspirant in a database called recruitment

Note:

- <form action="the URL of php script " method="get">
- If the CGPA is below 7.5 then do not store the data. Instead, display a message saying "Dear aspirant_name, The minimum CGPA must be 7.5!!

```
<html>
<head>
<title> job form </title> </head>
<body>
<?php
$con=mysqli_connect ("localhost", "root","");
mysqli_select_db ($con, "recruitment");
if (mysqli_connect_errno()){
    printf("Connection failed %s", mysqli_connect_error());
    exit;
}
else{
print("Connection to Mysql successful");
$name=$_GET['name'];
$gender=$_GET['gender'];
$branch= $_GET['branch'];
$email = $_GET['email'];
$cgpa= $_GET['cgpa'];
```

```

$ph_no= $_GET['ph_no'];
$dob= $_GET['dob'];
if ($cgpa <7)
{
    print("Dear ".$name.", The minimum CGPA must be 7.5!!");
    exit();
}
$query="INSERT INTO job_aspirant
VALUES('$name','$gender','$branch','$email','$cgpa','$ph_no','$dob');"
mysqli_query ($con, $query);
if (mysqli_error($con))
    print(mysqli_error($con));
else
    print("Saved your details successfully. An email will be sent to the id".$email);
mysqli_close($con);
}
?>
</body>
</html>

```

8.2 Write a PHP script to accept the data through HTML form created in Lab: 2 (Q2) and Store it in a table called credentials in a database called admission.

Note:

- <form action=" the URL of php script" method="post">
- password should be stored in an encrypted format

```

<html>
<body>
<?php
$con = mysqli_connect("localhost", "root", "");
mysqli_select_db ($con, "admission");

```

```
if (mysqli_connect_errno()){  
    printf(" Connection failed: %s", mysqli_connect_error());  
    exit;  
}  
else{  
    print("Connection to MySQL successful!<br>");  
    $name=$_POST['name'];  
    $passwd=$_POST['passwd'];  
    $pass=sha1($passwd);  
    $query="INSERT INTO credentials VALUES ('$name','$pass');";  
    mysqli_query($con,$query);  
    if (mysqli_error($con))  
        print(mysqli_error($con));  
    else  
        echo $name.", You have successfully logged in!!";  
    mysqli_close($con);  
}  
?>  
</body>  
</html>
```

LAB 09

PHP-02

9.1 Write a PHP script to connect to the database ,execute SELECT query on a table and display all the details present in a table format

```
<html>
<head>
<title>Display info in table />
<style>
table{
width:75%;
border-collapse:collapse;
}
td, th{
text-align: center;
font-family: serif;
border: 2px solid black;
}
</style>
</head>
<body>
<?php
$con= mysqli_connect("localhost","root", "");
mysqli_select_db($con, "Sales");
if (mysqli_connect_errno()){
    printf("Connection failed: %s",mysqli_connect_error());
    exit;
}
else{
    print("Connection to MySQL successful!<br>");
```

```

$query="Select * from cookie_sales";
$result=mysqli_query($con,$query);
if (mysqli_error($con))
    print(mysqli_error($con));
else{
    echo "Sales details are <br> <br>";
    echo "<table><tr><th>Sale ID </th>
        <th>Salesman name</th>
        <th>Sale Amount </th>
        <th>Sale Date </th></tr>";
    while($row = mysqli_fetch_assoc($result)){
        echo "<tr> <td>".$row['Sale_id'].</td>
            <td>".$row['Salesman_name'].</td>
            <td>".$row['Sale_amount'].</td>
            <td>".$row['Sale_Date'].</td>
            </tr>";
    }
    echo "</table>";
}
mysqli_close($con);
}
?>
</body>
</html>

```

9.2 Write a PHP script to connect to the MYSQL database and access the table cookie_sales(Sale_ID, Salesman_Name, Sale_Amount, Sale_Date)' and to

- Display only those rows from the cookie_sales table where the Sale Amount is less than 99 dollars, Print the no of rows fetched.

- Change the Salesman_Name to MGR where Sale Amount is 0. Print the no of rows affected

```

<html>
<head>
<title> Cookie Sales </title>
</head>
<body>
<?php
$con=mysqli_connect("localhost", "root", "");
mysqli_select_db($con, "Sales");
if (mysqli_connect_errno()){
    printf("Connection failed: %s",mysqli_connect_error());
    exit;
}
else{

$query1="Select * from cookie_sales where Sale_Amount >99";
$result1=mysqli_query($con,$query1);
$rowCount=mysqli_num_rows($result1);
if (mysqli_error($con))
    print(mysqli_error($con));
else{
    while($row = mysqli_fetch_assoc($result1)){
        echo "Sale ID: " . $row['Sale_ID']. "<br> Salesman name: " . $row['Salesman_name'].
"<br> Sale Amount: " . $row['Sale_amount']. " <br> Sale Date: " . $row['Sale_Date'].
"<br><br>";
        echo "No of rows fetched : " . $rowCount;
    }
}
}

```



```

$query2= "update cookie_sales set Salesman_name='MGR' where Sale_Amount=0";
$result2=mysqli_query($con,$query2);
$cnt=mysqli_affected_rows($con);
if (mysqli_error($con))
    print(mysqli_error($con));
else{
    if($result2){
        echo "Salesman name updated to MGR for the person who had Sale Amount 0 <br>";
        echo "No of rows affected: ".$cnt."<br>";
    }
    else
        echo "Update failed";
}
mysqli_close($con);
}
?>
</body>
</html>

```

9.3 Write HTML code to create a login page(User-ID, Password and a login(submit-type) button). On clicking the login button the PHP script should connect to the database and check if the User-ID exists in the credentials table. If it exists then hash the input password and compare it with the already hashed password in the credentials table. If not a match then print an error message saying “The credentials are wrong” else display a success message saying “The login is successful!”

passwordValidation.html(login form)

```
<html>
```

```

<HEAD>

<TITLE>
    Job Aspirant form
</TITLE>

<style>
    form{
        margin:0 auto;
        width:400px;
        padding:1em;
        border:1px solid #ccc;
        border-radius: 1em;
    }
    label{
        display:inline-block;
        width:90px;
        text-align:right;
    }

    button{
        margin-left:9em;
    }
</style>

</HEAD>

<BODY onload="return popUp()">

<FORM      id="form"      onsubmit="return      validatePassword()"
action="http://localhost/passwordValidation.php" method="post">

    <div>

        <label>Username</label>

        <input type="text" id="name" name="name" >

    </div>

    <div>

```

```

        <label>Enter Password</label>

        <input type="password" id="pass1" name="pass1" >
    </div>

    <div class="button">

        <button type="submit" value="submit">Login</button>

    </div>
</FORM>
</BODY>

    <script>
function validatePassword(){
    var name=document.getElementById('name').value;
    if(name==""){
        alert("You need to enter username");
        return false;
    }

    var pass1=document.getElementById('pass1');
    if(pass1.value==""){
        alert("You need to enter the password");
        pass1.focus();
        return false;
    }
}

    </script>
</html>

```

passwordValidation.php(to allow the existing users only)

```

<!DOCTYPE html>

<html>

<head>

```

```

<title>Password Validation</title>

</head>

<body>

<?php

$con = mysqli_connect("localhost", "root", "", "admission");
if (mysqli_connect_error()) {
    printf("Connection failed: %s", mysqli_connect_error());
    exit();
} else {
    printf("Connection to MySQL successful!<br>");
    $name = $_POST['name'];
    $passwd = $_POST['pass1'];
    $trimpass=trim($passwd);
    $hashedPasswd =sha1($trimpass);
    $query = "SELECT * FROM credentials WHERE name='$name'";
    $res = mysqli_query($con, $query);
    if (mysqli_error($con)) {
        print(mysqli_error($con));
    } else {
        while ($row = mysqli_fetch_assoc($res)) {
            $dbPassword = $row['password'];
            echo $dbPassword."<br>";
            echo $hashedPasswd."<br>";

            if ($dbPassword == $hashedPasswd) { // Compare hashed passwords
                echo "You have logged in!";
            } else {
                echo "Wrong password";
            }
        }
    }
}

```

```
}  
mysqli_close($con);  
?>  
</body>  
</html>
```