

NAME:SHEILA WAITHERA MURIITHI


REG NO:BIT/2024/32455

Assignment 1


Students should:

1. Install all development tools
2. Create one Flutter app
3. Change:
 - App title
 - Background color
 - Font size
4. Submit screenshots and source code


GIT INSTALLATION

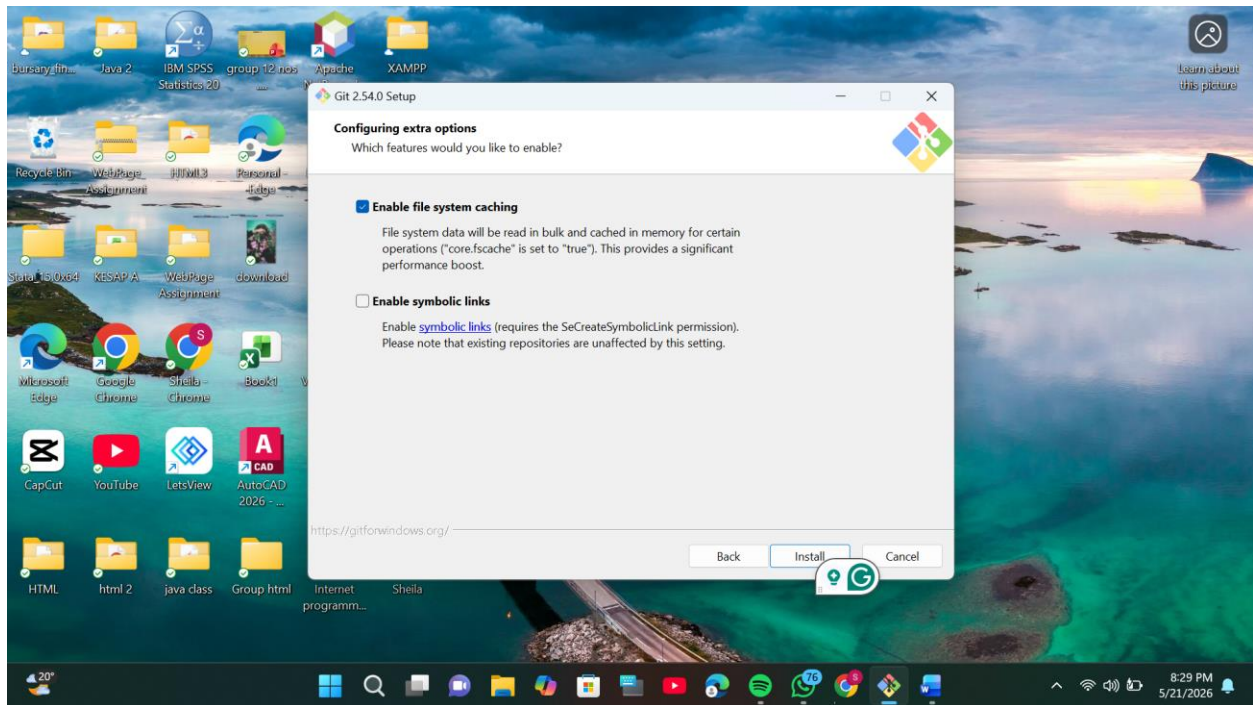

ANDROID STUDIO INSTALLATION

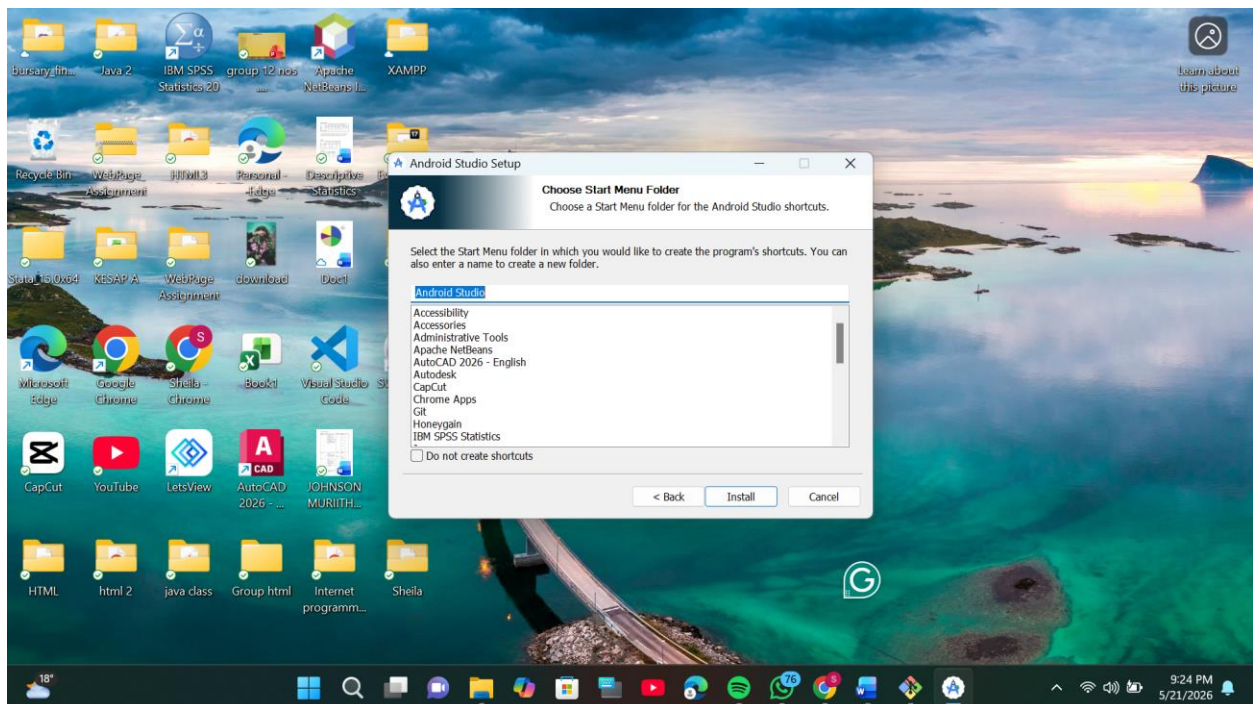

Week one :

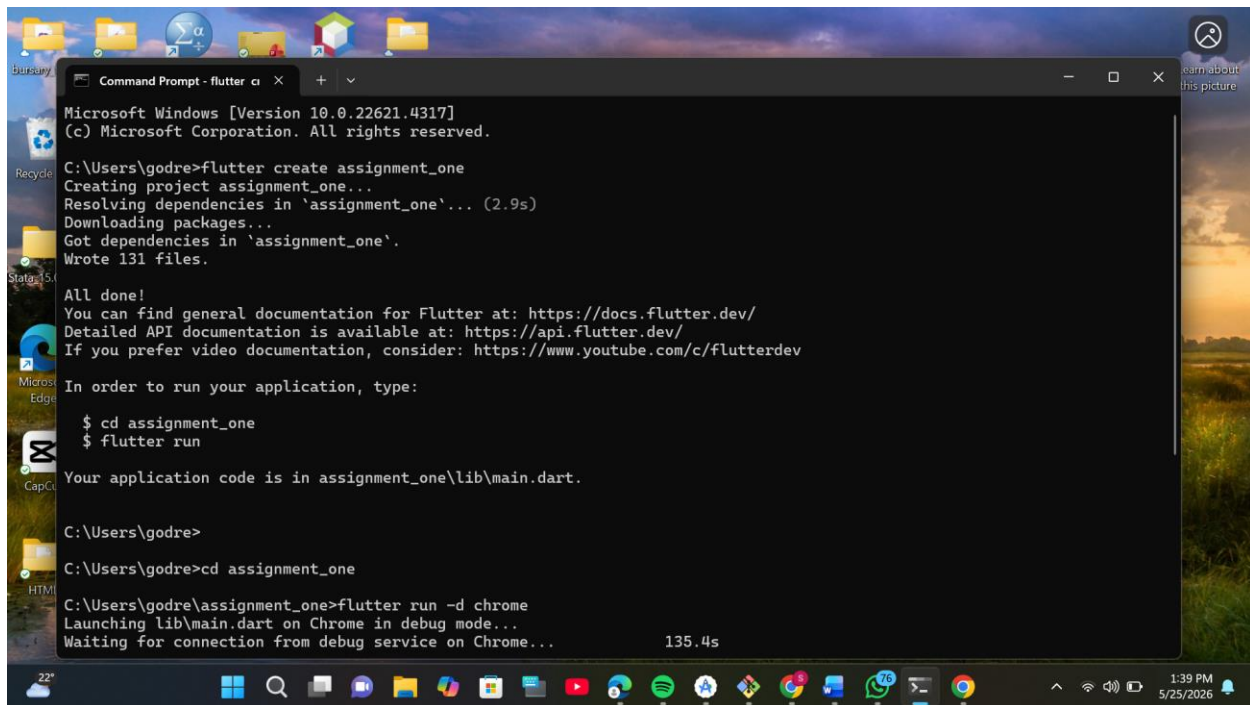

The screenshot shows a Windows 10 desktop with a Command Prompt window titled "Command Prompt - flutter ci". The window displays the output of the following commands:

```
Microsoft Windows [Version 10.0.22621.4317]
(c) Microsoft Corporation. All rights reserved.

C:\Users\godre>flutter create assignment_one
Creating project assignment_one...
Resolving dependencies in 'assignment_one'... (2.9s)
Downloading packages...
Got dependencies in 'assignment_one'.
Wrote 131 files.

All done!
You can find general documentation for Flutter at: https://docs.flutter.dev/
Detailed API documentation is available at: https://api.flutter.dev/
If you prefer video documentation, consider: https://www.youtube.com/c/flutterdev

In order to run your application, type:

$ cd assignment_one
$ flutter run


Your application code is in assignment_one\lib\main.dart.

C:\Users\godre>

C:\Users\godre>cd assignment_one

C:\Users\godre\assignment_one>flutter run -d chrome
Launching lib\main.dart on Chrome in debug mode...
Waiting for connection from debug service on Chrome... 135.4s
```

The desktop background is a scenic image of a field at sunset. The taskbar at the bottom shows various application icons, including the Start menu, search, and several open applications like Microsoft Edge and Google Chrome.


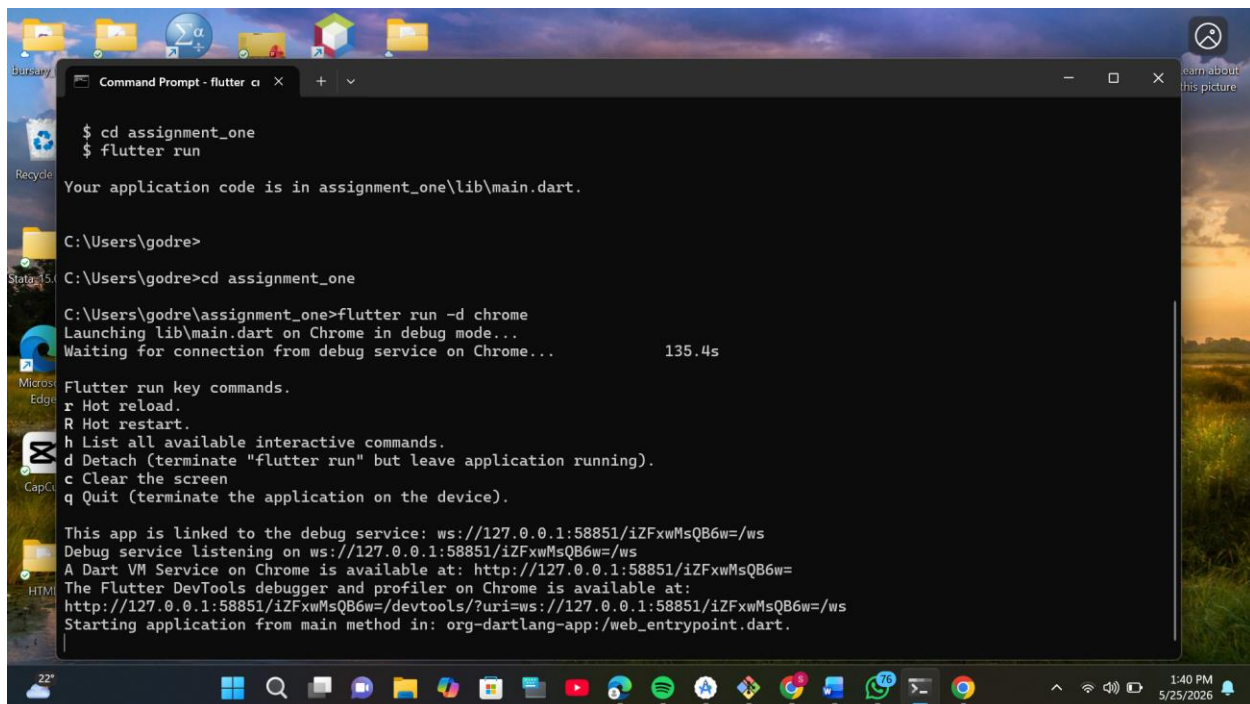


This screenshot shows the same Windows 10 desktop with the Command Prompt window displaying the continuation of the Flutter application run. The output includes the same initial commands as the first screenshot, followed by a list of Flutter run key commands and the application's connection details:

```
Flutter run key commands.
r Hot reload.
R Hot restart.
h List all available interactive commands.
d Detach (terminate "flutter run" but leave application running).
c Clear the screen
q Quit (terminate the application on the device).

This app is linked to the debug service: ws://127.0.0.1:58851/iZFxmMsQB6w=/ws
Debug service listening on ws://127.0.0.1:58851/iZFxmMsQB6w=/ws
A Dart VM Service on Chrome is available at: http://127.0.0.1:58851/iZFxmMsQB6w=
The Flutter DevTools debugger and profiler on Chrome is available at:
http://127.0.0.1:58851/iZFxmMsQB6w=/devtools/?uri=ws://127.0.0.1:58851/iZFxmMsQB6w=/ws
Starting application from main method in: org-dartlang-app:/web_entrypoint.dart.
```

The application is now running in debug mode on Chrome. The taskbar and desktop background remain the same as in the first screenshot.

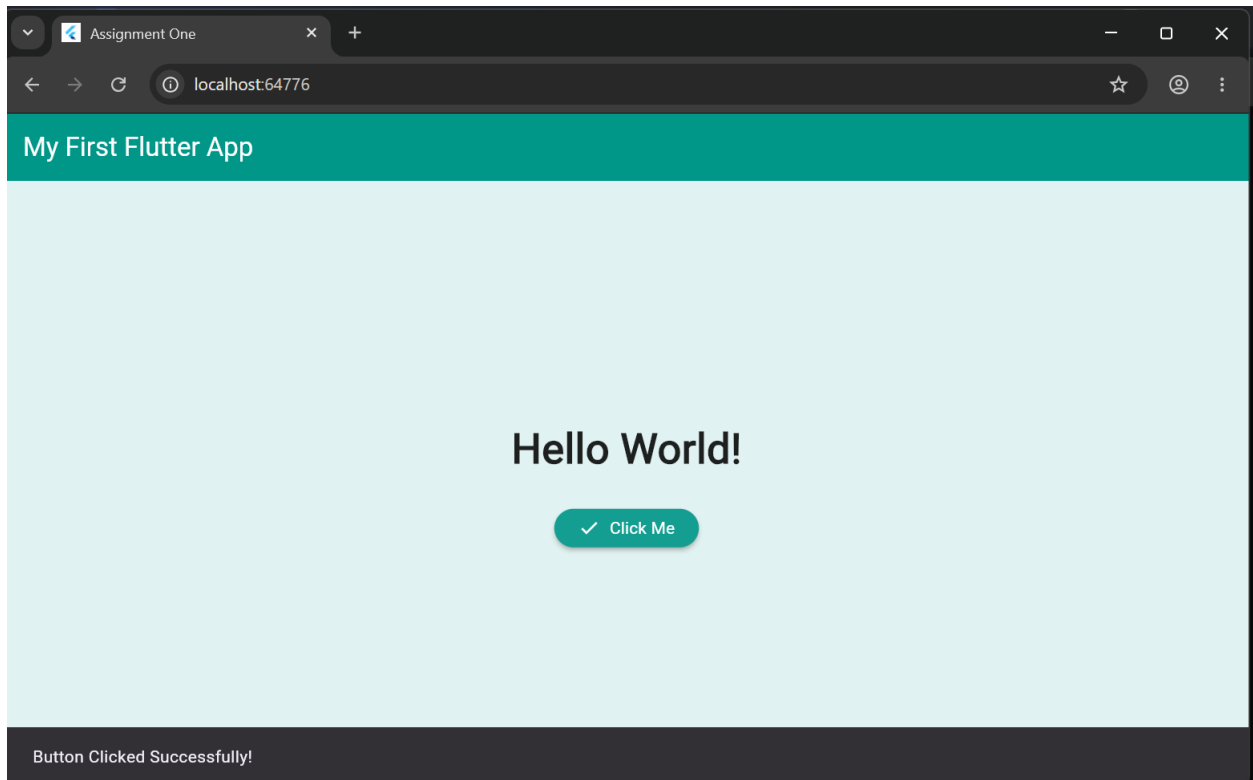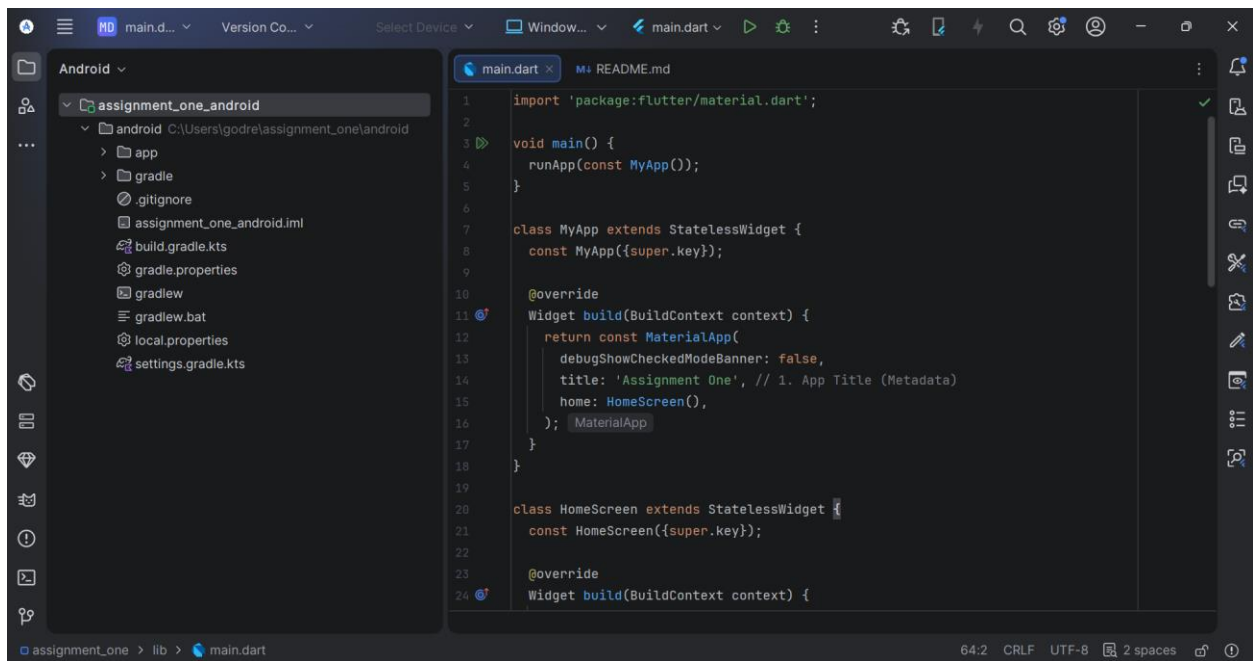

```
import 'package:flutter/material.dart';
```

```
void main() {  
  runApp(const MyApp());  
}
```

```
class MyApp extends StatelessWidget {  
  const MyApp({super.key});  
  
  @override  
  Widget build(BuildContext context) {  
    return const MaterialApp(  
      debugShowCheckedModeBanner: false,  
      title: 'Assignment One', // 1. App Title (Metadata)  
      home: HomeScreen(),  
    );  
  }  
}
```

```
class HomeScreen extends StatelessWidget {  
  const HomeScreen({super.key});  
  
  @override  
  Widget build(BuildContext context) {  
    return Scaffold(  
      backgroundColor: const Color(0xFFE0F2F1), // 2. Background Color (Light Teal)  
      appBar: AppBar(  
        title: const Text('My First Flutter App'), // 1. App Title (Visible UI Header)
```

```

    backgroundColor: Colors.teal,
    foregroundColor: Colors.white,
  ),
  body: Center(
    child: Column(
      mainAxisAlignment: MainAxisAlignment.center,
      children: [
        const Text(
          'Hello World!',
          style: TextStyle(
            fontSize: 35.0, // 3. Font Size Updated
            fontWeight: FontWeight.bold,
            color: Colors.black87,
          ),
        ),
        const SizedBox(height: 25),
        ElevatedButton.icon(
          onPressed: () {
            ScaffoldMessenger.of(context).showSnackBar(
              const SnackBar(content: Text('Button Clicked Successfully!')),
            );
          },
          icon: const Icon(Icons.check),
          label: const Text('Click Me'),
          style: ElevatedButton.styleFrom(
            backgroundColor: Colors.teal,
            foregroundColor: Colors.white,

```

```
        padding: const EdgeInsets.symmetric(horizontal: 20, vertical: 12),
      ),
    ),
  ],
),
),
);
}
```

WEEK 2 ASSIGNMENT


Students build:

Mini Student Management App


Features:

- Login page
- Student registration
- Save records locally
- Simple navigation


Login page

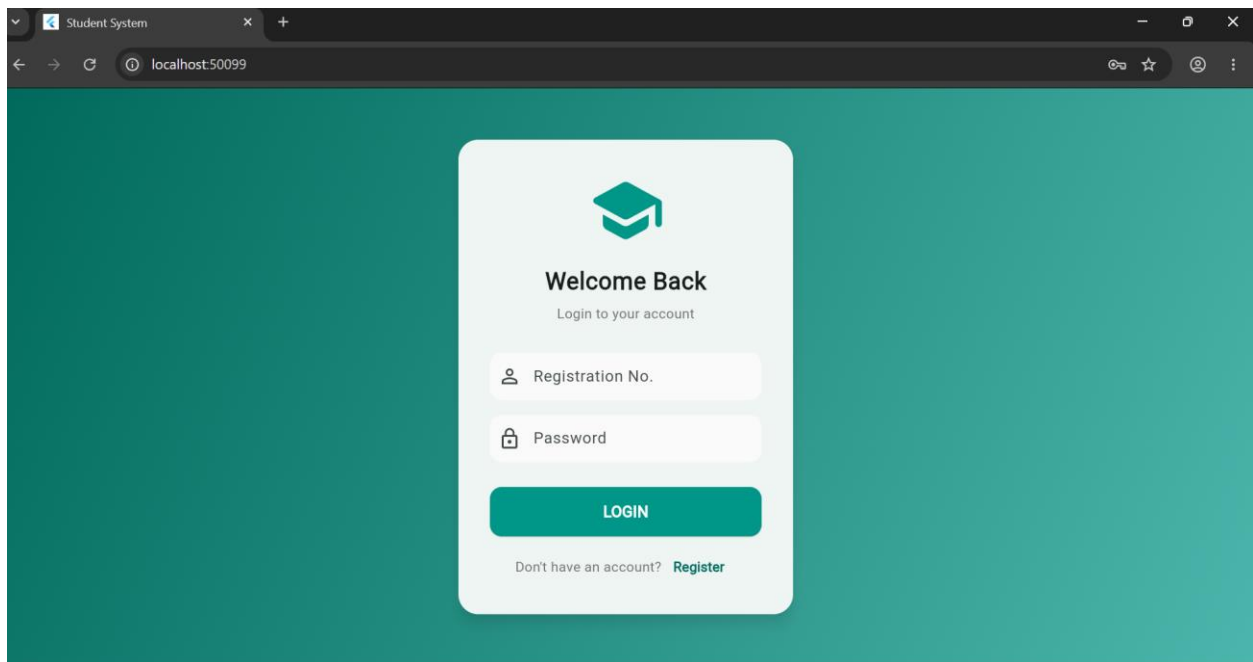

Student registration

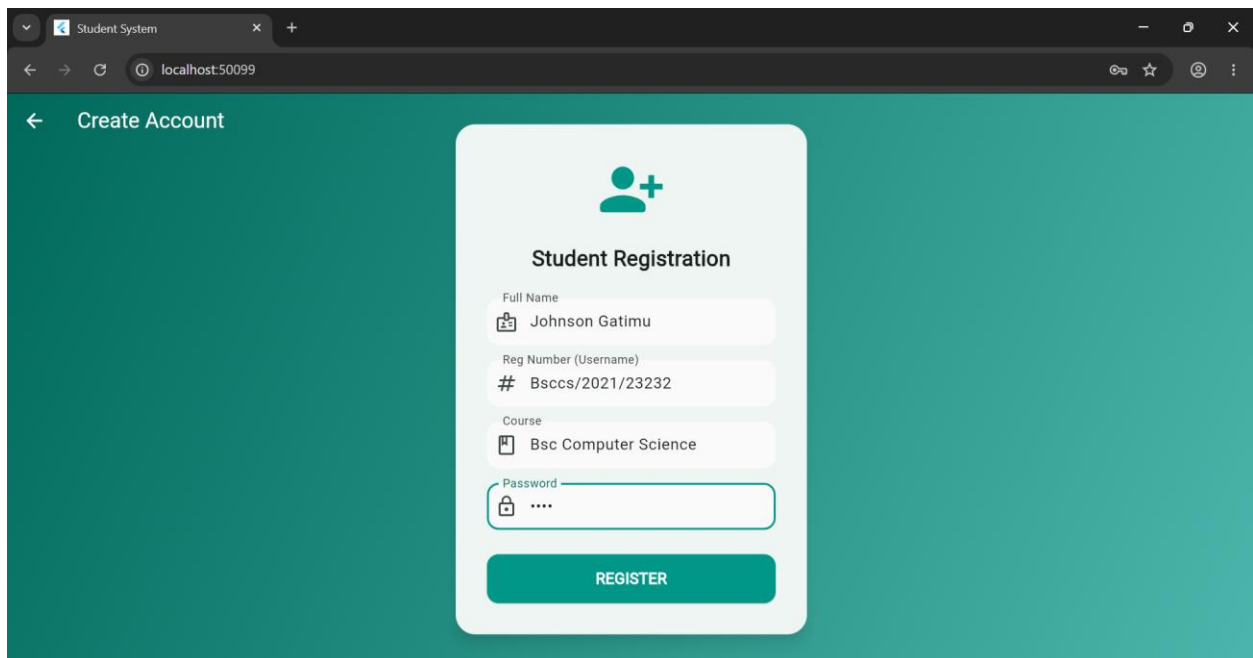

Saving records locally

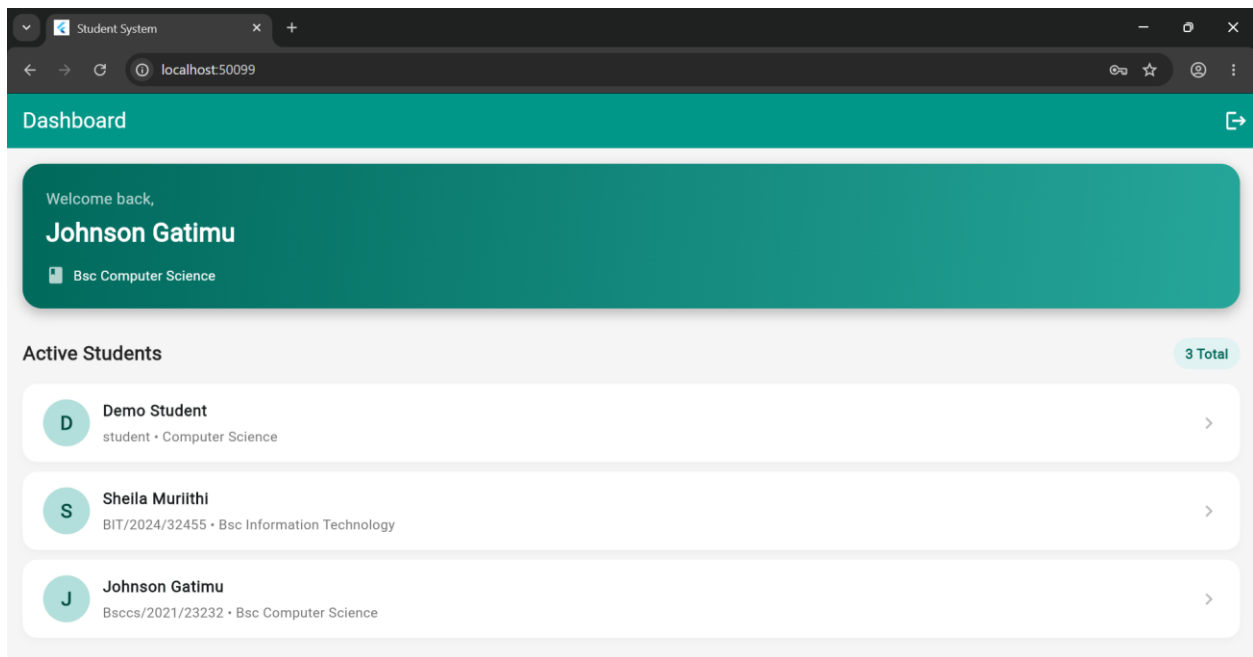

Source code:

The application is structured using a modular clean-architecture pattern to separate the data model, local mock storage, and user interface layers:

- **lib/models/student.dart** — Defines the custom blueprint class for Student attributes.
- **lib/database/mock_db.dart** — Acts as an in-memory local data repository array.
- **lib/screens/login_page.dart** — Handles portal authentication and validation forms.
- **lib/screens/register_page.dart** — Manages user sign-up inputs and commits them locally.
- **lib/screens/dashboard_page.dart** — Renders the modern profile welcome layout and lists registered entries.
- **lib/main.dart** — Entry point that initializes global themes and launches the application.

2. Core Application Logic (lib/main.dart)

This is the primary initialization engine that boots the app and sets up the global design constraints:

Dart

```
import 'package:flutter/material.dart';
```

```
import 'screens/login_page.dart';
```

```
void main() {  
  runApp(const StudentSystemApp());  
}
```

```
class StudentSystemApp extends StatelessWidget {  
  const StudentSystemApp({super.key});
```

```
  @override
```

```
  Widget build(BuildContext context) {  
    return MaterialApp(  
      debugShowCheckedModeBanner: false,  
      title: 'Student System',  
      theme: ThemeData(  
        colorScheme: ColorScheme.fromSeed(seedColor: Colors.teal),  
        useMaterial3: true,  
        inputDecorationTheme: InputDecorationTheme(  
          filled: true,  
          fillColor: Colors.grey.shade50,  
          border: OutlineInputBorder(  
            borderRadius: BorderRadius.circular(12),  
            borderSide: BorderSide.none,  
          ),  
          focusedBorder: OutlineInputBorder(  
            borderRadius: BorderRadius.circular(12),  
            borderSide: const BorderSide(color: Colors.teal, width: 2),  
          ),  
        ),  
      ),  
    );  
  }  
}
```

```

    ),
    home: const LoginPage(), // Launches the centralized card login screen
  );
}
}

```

3. Sample Feature Highlight: Registration Logic (lib/screens/register_page.dart)

This code snippet demonstrates how user input parameters are validated and appended to the local memory array to simulate runtime local database persistence:

Dart

```

void registerStudent() {
  if (formKey.currentState!.validate()) {
    // Structural logic to check if user already exists in global array
    bool exists = globalStudents.any((s) => s.regNo == regCtrl.text);
    if (exists) {
      ScaffoldMessenger.of(context).showSnackBar(
        const SnackBar(content: Text("Registration number already exists!")),
      );
      return;
    }

    // Committing the text controllers' values to the local state system repository
    setState() {
      globalStudents.add(Student(
        name: nameCtrl.text,
        regNo: regCtrl.text,
        course: courseCtrl.text,
        password: passCtrl.text,

```

```
));  
});  
  
// Pushing the user back down the navigation route stack to the login threshold  
Navigator.pop(context);  
}  
}
```

WEEK 3 ASSIGNMENT

Build a Complete UI Prototype

Requirements:


- 5 Screens minimum
- Navigation working
- Responsive design
- Modern UI
- Functional forms

Tools:


- Figma + Flutter or React Native

5 screens Minimum


Login / Sign In

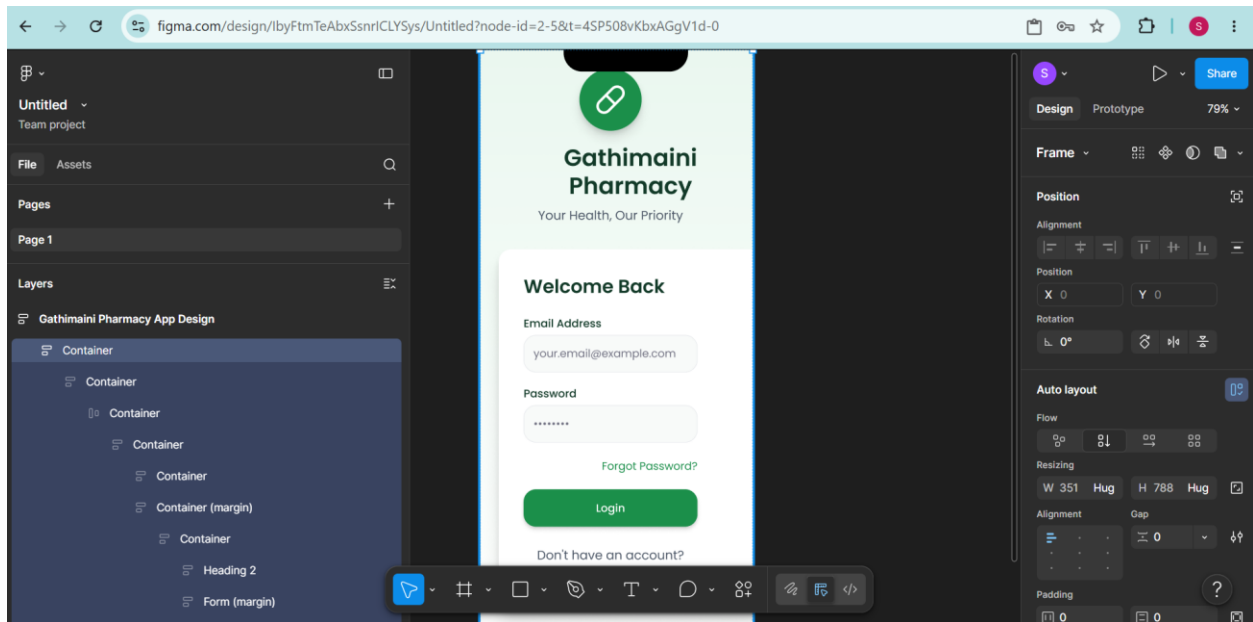


Registration / Sign Up

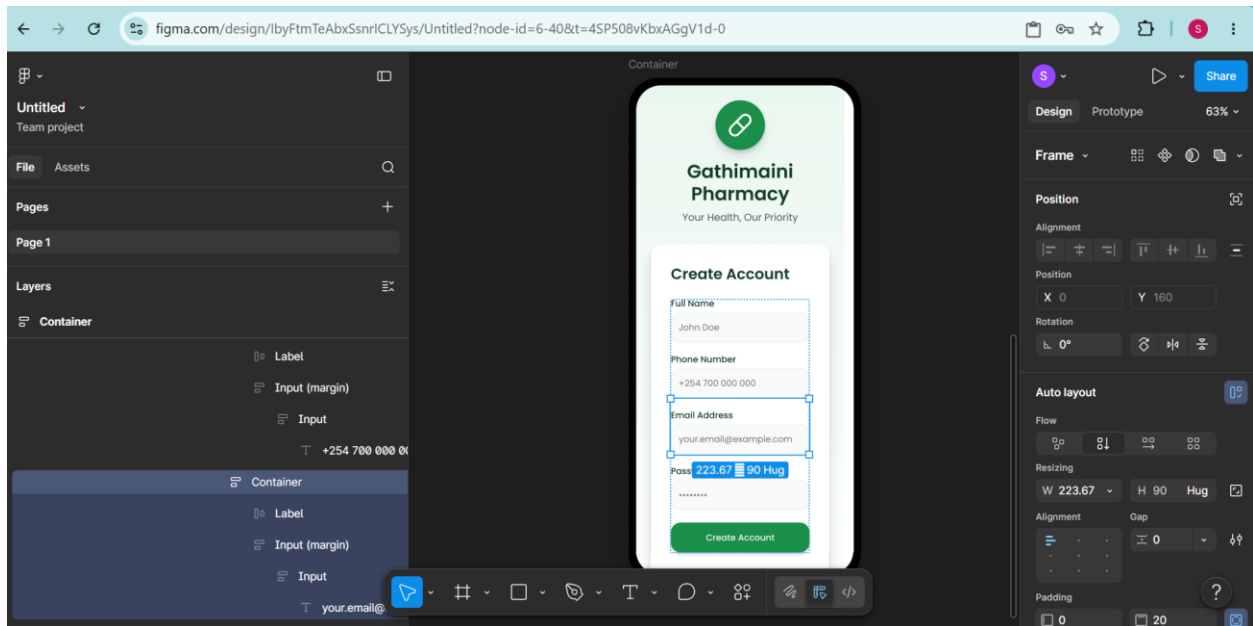



Home Dashboard

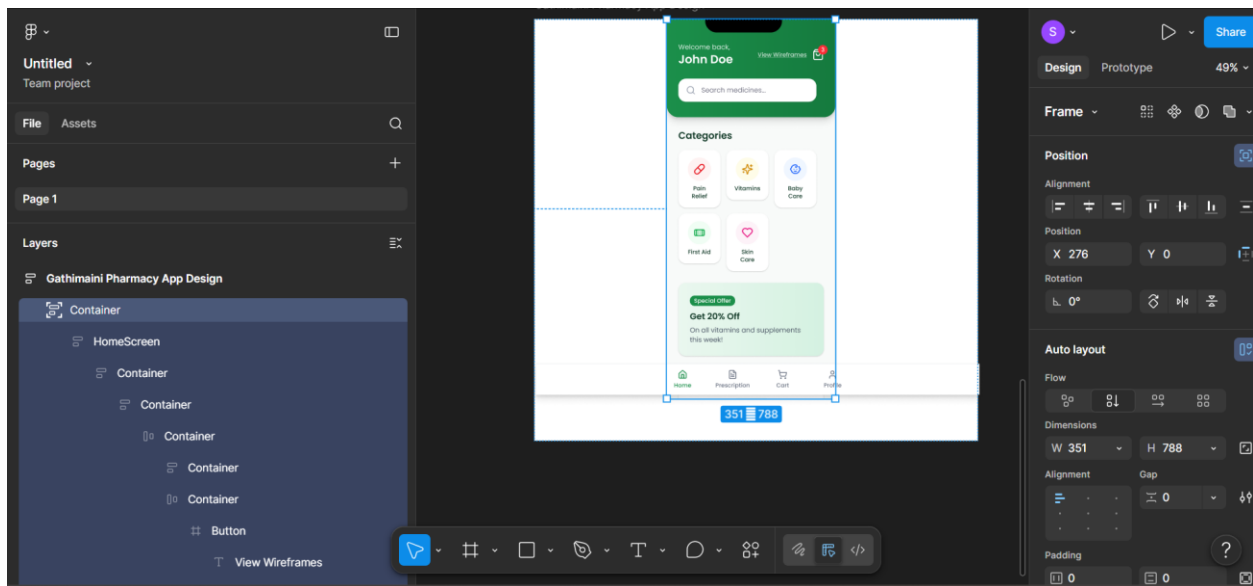

Prescription Upload / Order Page

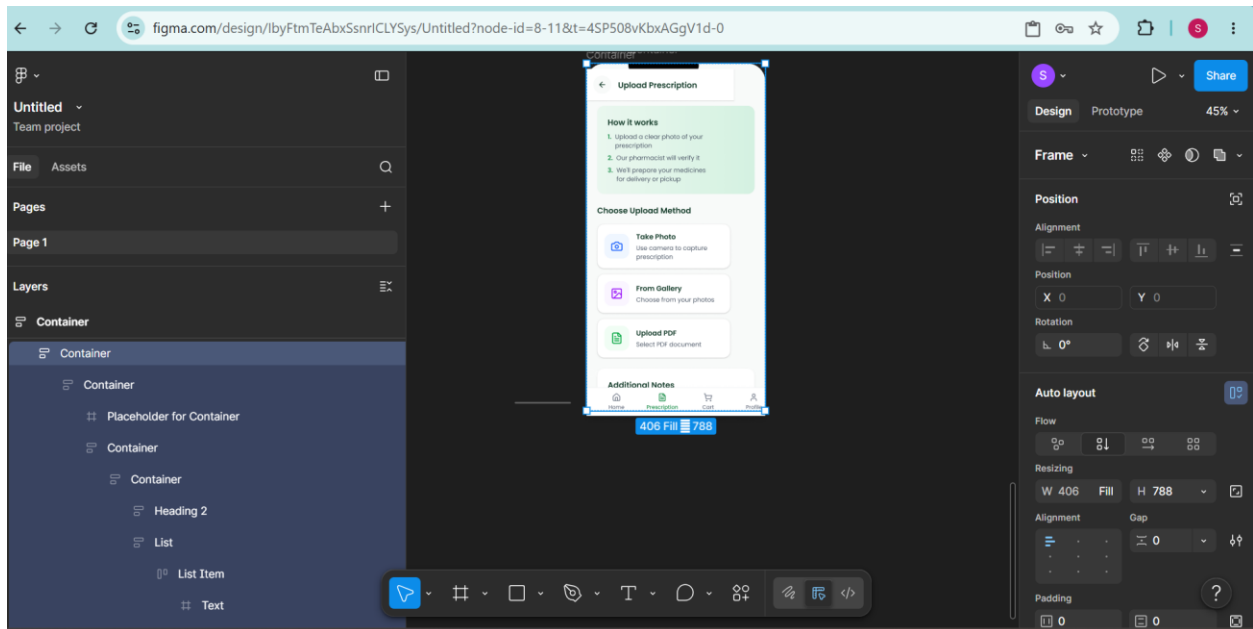

User Profile Screen.

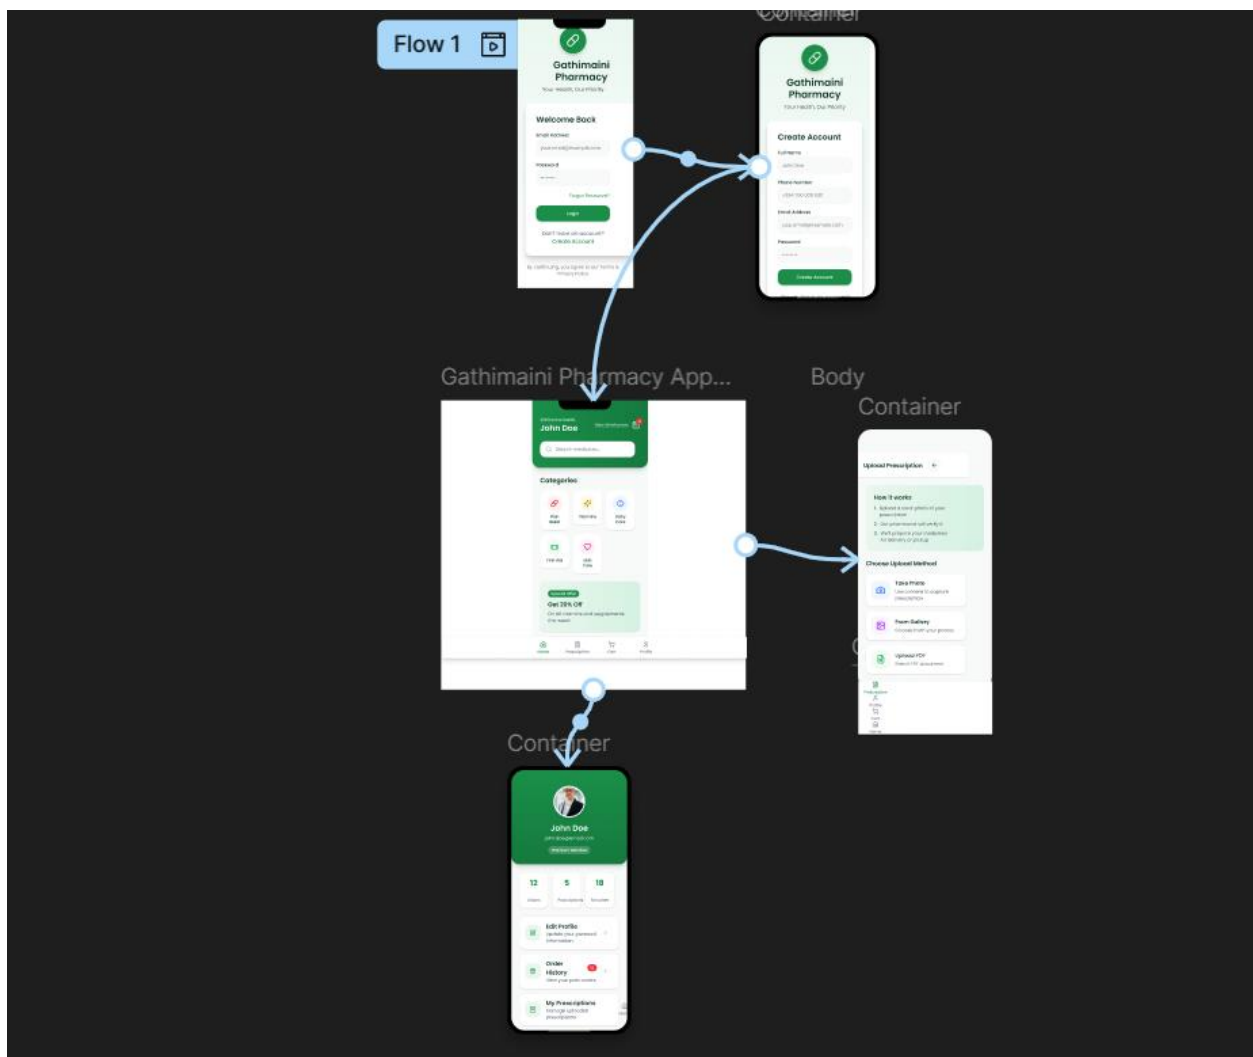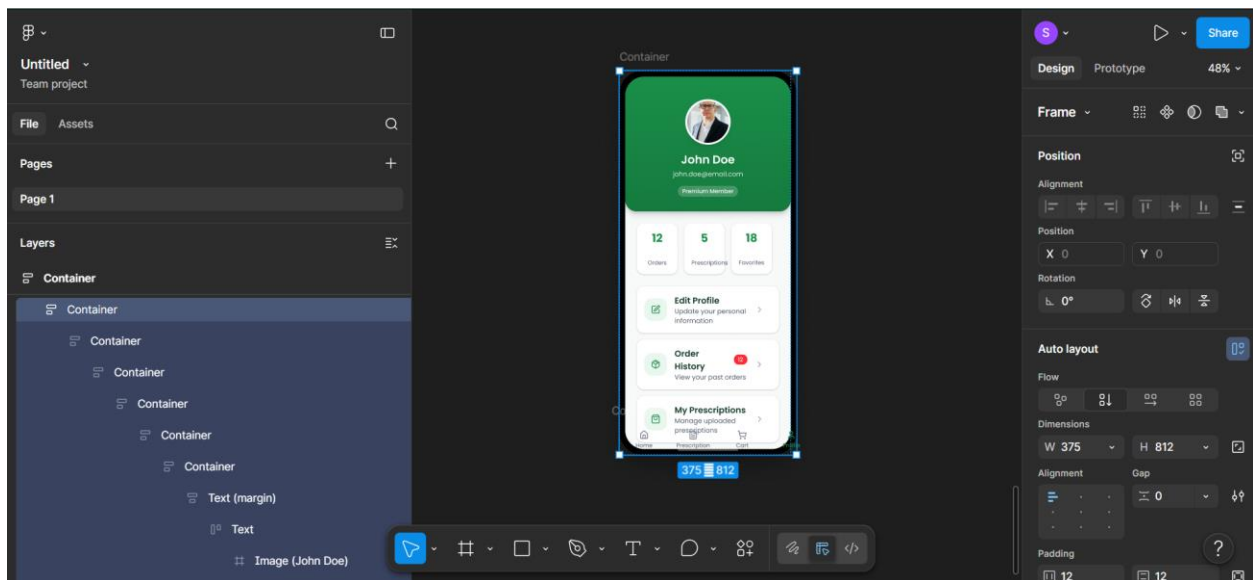

Navigation working

Source code on figma:

1. Main App Files

src/app/App.tsx

```
import { RouterProvider } from "react-router";

import { router } from "../routes";

import { PhoneFrame } from "../components/PhoneFrame";

export default function App() {

  return (

    <PhoneFrame>

      <RouterProvider router={router} />

    </PhoneFrame>

  );

}
```

src/app/routes.tsx

```
import { createBrowserRouter } from "react-router";

import { LoginScreen } from "../screens/LoginScreen";

import { HomeScreen } from "../screens/HomeScreen";

import { MedicineDetailsScreen } from "../screens/MedicineDetailsScreen";

import { PrescriptionUploadScreen } from "../screens/PrescriptionUploadScreen";

import { ProfileScreen } from "../screens/ProfileScreen";
```



```
import { WireframesScreen } from "../screens/WireframesScreen";
```

```
import { CartScreen } from "../screens/CartScreen";
```

```
export const router = createBrowserRouter([
```

```
{
```

```
  path: "/",
```

```
  Component: LoginScreen,
```

```
},
```

```
{
```

```
  path: "/home",
```

```
  Component: HomeScreen,
```

```
},
```

```
{
```

```
  path: "/medicine/:id",
```

```
  Component: MedicineDetailsScreen,
```

```
},
```

```
{
```

```
  path: "/prescription",
```

```
  Component: PrescriptionUploadScreen,
```

```
},
```

```
{
```

```
  path: "/profile",
```

```
  Component: ProfileScreen,
```

```

    },
    {
      path: "/wireframes",
      Component: WireframesScreen,
    },
    {
      path: "/cart",
      Component: CartScreen,
    },
  ]);

```

2. Component Files

src/app/components/PhoneFrame.tsx

```

import { ReactNode } from "react";

interface PhoneFrameProps {
  children: ReactNode;
}

export function PhoneFrame({ children }: PhoneFrameProps) {
  return (
    <div className="min-h-screen bg-gradient-to-br from-gray-900 via-gray-800 to-gray-900
flex items-center justify-center p-8">
      <div className="relative">
        {/* Phone Frame */}

```

```

<div className="relative w-[375px] h-[812px] bg-black rounded-[3rem] p-3 shadow-2xl">

  {/* Screen Notch */}

  <div className="absolute top-0 left-1/2 -translate-x-1/2 w-40 h-7 bg-black rounded-b-3xl
z-10"></div>


  {/* Inner Screen Bezel */}

  <div className="relative w-full h-full bg-white rounded-[2.5rem] overflow-hidden">

    {/* Status Bar Space */}

    <div className="absolute top-0 left-0 right-0 h-11 bg-transparent z-10 pointer-events-
none"></div>


    {/* App Content */}

    <div className="w-full h-full overflow-auto">

      {children}

    </div>

  </div>


  {/* Home Indicator */}

  <div className="absolute bottom-2 left-1/2 -translate-x-1/2 w-32 h-1 bg-white/30
rounded-full"></div>

</div>


  {/* Phone Shadow */}

  <div className="absolute inset-0 rounded-[3rem] shadow-[0_35px_60px_-
15px_rgba(0,0,0,0.5)] pointer-events-none"></div>

```

```
</div>
```

```
</div>
```

```
);
```

```
}
```

src/app/components/BottomNav.tsx

```
import { Home, FileText, User, ShoppingCart } from "lucide-react";
```

```
import { useNavigate, useLocation } from "react-router";
```

```
export function BottomNav() {
```

```
  const navigate = useNavigate();
```

```
  const location = useLocation();
```

```
  const navItems = [
```

```
    { icon: Home, label: "Home", path: "/home" },
```

```
    { icon: FileText, label: "Prescription", path: "/prescription" },
```

```
    { icon: ShoppingCart, label: "Cart", path: "/cart" },
```

```
    { icon: User, label: "Profile", path: "/profile" },
```

```
  ];
```

```
  return (
```

```
    <div className="fixed bottom-0 left-0 right-0 bg-white border-t border-gray-200 shadow-lg z-50">
```

```
      <div className="max-w-md mx-auto flex justify-around items-center h-16 px-4">
```

```
        {navItems.map((item) => {
```

```

const Icon = item.icon;

const isActive = location.pathname === item.path;

return (
  <button
    key={item.path}
    onClick={() => navigate(item.path)}
    className={`flex flex-col items-center justify-center flex-1 transition-colors ${
      isActive ? "text-[#1B8F4A]" : "text-gray-500"
    }`}
  >
    <Icon className={`w-5 h-5 ${isActive ? "fill-[#1B8F4A]/10" : ""}`} />
    <span className="text-xs mt-1">{item.label}</span>
  </button>
);
}}
</div>
</div>
);
}

```

3. Screen Files

src/app/screens/LoginScreen.tsx

(Already shown above - 162 lines with signup/login toggle)

src/app/screens/HomeScreen.tsx

(Already shown - 209 lines with categories, search, featured medicines)

src/app/screens/MedicineDetailsScreen.tsx

(Already shown - 237 lines with product details, quantity selector, add to cart)

src/app/screens/PrescriptionUploadScreen.tsx

(Already shown - 236 lines with upload options, notes, submission)

src/app/screens/ProfileScreen.tsx

(Already shown - 201 lines with user profile, stats, menu items, logout)

src/app/screens/CartScreen.tsx

```
import { useState } from "react";

import { useNavigate } from "react-router";

import { BottomNav } from "../components/BottomNav";

import { Card } from "../components/ui/card";

import { Button } from "../components/ui/button";

import { Badge } from "../components/ui/badge";

import { motion } from "motion/react";

import { ArrowLeft, Minus, Plus, Trash2, ShoppingBag } from "lucide-react";

import { ImageWithFallback } from "../components/figma/ImageWithFallback";

interface CartItem {

  id: number;

  name: string;

  price: number;

  quantity: number;
```

```
image: string;

category: string;

}
```

```
export function CartScreen() {

  const navigate = useNavigate();

  const [cartItems, setCartItems] = useState<CartItem[]>([

    {

      id: 1,

      name: "Paracetamol 500mg",

      price: 120,

      quantity: 2,

      image:

        "https://images.unsplash.com/photo-1631549916768-4119b2e5f926?crop=entropy&cs=tinysrgb&fit=max&fm=jpg&ixid=M3w3Nzg4Nzd8MHwxfHNlYXJjaHwxfHxtZWRpY2luZSUyMHBpbGxzJTlwcGhhcm1hY3l8ZW58MXx8fHwxNzgwNDMxNjU0fDA&ixlib=rb-4.1.0&q=80&w=1080",

      category: "Pain Relief",

    },

    {

      id: 2,

      name: "Vitamin C 1000mg",

      price: 850,

      quantity: 1,

      image:
```

```
"https://images.unsplash.com/photo-1664956618021-73c47736845e?crop=entropy&cs=tinysrgb&fit=max&fm=jpg&ixid=M3w3Nzg4Nzd8MHwxHNIYXJjaHwxfHx2aXRhbWlucyUyMHN1cHBsZW1lbnRzJTlwYm90dGxlfGVufDF8fHx8MTc4MDQzMjY1NHww&ixlib=rb-4.1.0&q=80&w=1080",
```

```
category: "Vitamins",
```

```
},
```

```
{
```

```
id: 3,
```

```
name: "Ibuprofen 400mg",
```

```
price: 180,
```

```
quantity: 1,
```

```
image:
```

```
"https://images.unsplash.com/photo-1719319384377-5f5a45b2f0d1?crop=entropy&cs=tinysrgb&fit=max&fm=jpg&ixid=M3w3Nzg4Nzd8MHwxHNIYXJjaHwxfHxwYWluJTlwcmVsaWVmJTlwZWVkaWNhdGlvbnxlbmwxfHx8fDE3ODA0MzE2NTV8MA&ixlib=rb-4.1.0&q=80&w=1080",
```

```
category: "Pain Relief",
```

```
},
```

```
]);
```

```
const updateQuantity = (id: number, delta: number) => {
```

```
  setCartItems((items) =>
```

```
    items.map((item) =>
```

```
      item.id === id
```

```
        ? { ...item, quantity: Math.max(1, item.quantity + delta) }
```

```
        : item
```



```
)  
);  
};
```

```
const removeItem = (id: number) => {  
  setCartItems((items) => items.filter((item) => item.id !== id));  
};
```

```
const subtotal = cartItems.reduce(  
  (sum, item) => sum + item.price * item.quantity,  
  0  
);
```

```
const deliveryFee = 150;
```

```
const total = subtotal + deliveryFee;
```

```
return (  
  <div className="min-h-screen bg-[#F8FAF9] pb-20">  
    { /* Header */ }  
    <div className="bg-gradient-to-r from-[#1B8F4A] to-[#157A3E] px-6 pt-12 pb-6 rounded-b-3xl shadow-lg">  
      <motion.div  
        initial={{ opacity: 0, y: -20 }}  
        animate={{ opacity: 1, y: 0 }}  
        transition={{ duration: 0.5 }}  

```

```

>

<div className="flex items-center gap-4 mb-2">

  <button

    onClick={() => navigate("/home")}

    className="w-10 h-10 bg-white/20 rounded-full flex items-center justify-center text-
white hover:bg-white/30 transition-colors"

  >

    <ArrowLeft className="w-5 h-5" />

  </button>

  <h1 className="text-white text-2xl font-semibold">My Cart</h1>

</div>

<p className="text-white/80 text-sm ml-14">

  {cartItems.length} {cartItems.length === 1 ? "item" : "items"} in

  your cart

</p>

</motion.div>

</div>

```

```

<div className="px-6 py-6 space-y-6">

  {cartItems.length === 0 ? (

    <motion.div

      initial={{ opacity: 0, scale: 0.9 }}

      animate={{ opacity: 1, scale: 1 }}

      transition={{ duration: 0.5 }}

```

```

        className="flex flex-col items-center justify-center py-20"
    >
    <div className="w-24 h-24 bg-[#EAF7EF] rounded-full flex items-center justify-center
mb-4">
        <ShoppingBag className="w-12 h-12 text-[#1B8F4A]" />
    </div>
    <h3 className="text-xl font-semibold text-[#123A28] mb-2">
        Your cart is empty
    </h3>
    <p className="text-gray-600 text-center mb-6">
        Add some medicines to get started
    </p>
    <Button
        onClick={() => navigate("/home")}
        className="bg-[#1B8F4A] hover:bg-[#157A3E] text-white px-8"
    >
        Browse Medicines
    </Button>
</motion.div>
):(
    <
    { /* Cart Items */ }
    <motion.div
        initial={{ opacity: 0, y: 20 }}

```

```

    animate={{ opacity: 1, y: 0 }}

    transition={{ delay: 0.1 }}

    className="space-y-3"
  >

  {cartItems.map((item, index) => (

    <motion.div

      key={item.id}

      initial={{ opacity: 0, x: -20 }}

      animate={{ opacity: 1, x: 0 }}

      transition={{ delay: 0.1 + index * 0.05 }}

    >

      <Card className="overflow-hidden shadow-sm">

        <div className="flex items-center p-4 gap-4">

          <div className="w-20 h-20 bg-[#F8FAF9] rounded-xl overflow-hidden flex-
shrink-0">

            <ImageWithFallback

              src={item.image}

              alt={item.name}

              className="w-full h-full object-cover"

            />

          </div>

          <div className="flex-1">

            <Badge className="bg-[#EAF7EF] text-[#1B8F4A] mb-1 text-xs">

              {item.category}

```

```

</Badge>

<h3 className="font-semibold text-[#123A28] mb-1">

  {item.name}

</h3>

<p className="text-[#1B8F4A] font-semibold">

  KES {item.price}

</p>

</div>

<div className="flex flex-col items-end gap-2">

  <button

    onClick={() => removeItem(item.id)}

    className="text-red-500 hover:text-red-600 transition-colors"

  >

    <Trash2 className="w-4 h-4" />

  </button>

  <div className="flex items-center gap-2 bg-[#F8FAF9] rounded-lg p-1">

    <button

      onClick={() => updateQuantity(item.id, -1)}

      className="w-6 h-6 bg-white rounded flex items-center justify-center text-
[#1B8F4A] hover:bg-[#EAF7EF] transition-colors"

    >

      <Minus className="w-3 h-3" />

    </button>

    <span className="w-6 text-center text-sm font-semibold text-[#123A28]">

```

```

        {item.quantity}
      </span>

      <button

        onClick={() => updateQuantity(item.id, 1)}

        className="w-6 h-6 bg-white rounded flex items-center justify-center text-
[#1B8F4A] hover:bg-[#EAF7EF] transition-colors"

      >

        <Plus className="w-3 h-3" />

      </button>

    </div>

  </div>

</div>

</Card>

</motion.div>

  )})
</motion.div>

```

```

{ /* Order Summary */}

<motion.div

  initial={{ opacity: 0, y: 20 }}

  animate={{ opacity: 1, y: 0 }}

  transition={{ delay: 0.3 }}

  >

    <Card className="p-6 shadow-sm">

```

```
<h2 className="text-lg font-semibold text-[#123A28] mb-4">
```

```
  Order Summary
```

```
</h2>
```

```
<div className="space-y-3">
```

```
  <div className="flex items-center justify-between text-sm">
```

```
    <span className="text-gray-600">Subtotal</span>
```

```
    <span className="font-medium text-[#123A28]">
```

```
      KES {subtotal.toLocaleString()}
```

```
    </span>
```

```
  </div>
```

```
  <div className="flex items-center justify-between text-sm">
```

```
    <span className="text-gray-600">Delivery Fee</span>
```

```
    <span className="font-medium text-[#123A28]">
```

```
      KES {deliveryFee.toLocaleString()}
```

```
    </span>
```

```
  </div>
```

```
<div className="border-t border-gray-200 pt-3 mt-3">
```

```
  <div className="flex items-center justify-between">
```

```
    <span className="font-semibold text-[#123A28]">
```

```
      Total
```

```
    </span>
```

```
    <span className="font-semibold text-xl text-[#1B8F4A]">
```

```
      KES {total.toLocaleString()}
```

```
</span>
```

```
</div>
```

```
</div>
```

```
</div>
```

```
</Card>
```

```
</motion.div>
```

```
{/* Checkout Button */}
```

```
<motion.div
```

```
  initial={{ opacity: 0, y: 20 }}
```

```
  animate={{ opacity: 1, y: 0 }}
```

```
  transition={{ delay: 0.4 }}
```

```
>
```

```
  <Button className="w-full h-14 bg-[#1B8F4A] hover:bg-[#157A3E] text-white text-lg  
font-semibold rounded-xl shadow-lg">
```

```
    Proceed to Checkout
```

```
  </Button>
```

```
  <p className="text-center text-xs text-gray-500 mt-3">
```

```
    Prescription medicines require verification before checkout
```

```
  </p>
```

```
</motion.div>
```

```
</>
```

```
  )}
```

```
</div>
```



```
<BottomNav />

</div>

);

}
```



4. Package.json

(Key dependencies shown above - React Router 7, Motion, Lucide React, Radix UI, Tailwind CSS v4)

System Summary:

- **7 screens:** Login, Home, Medicine Details, Cart, Prescription Upload, Profile, Wireframes
- **Features:** User authentication, product browsing, cart management, prescription upload, user profile
- **Design system:** Healthcare green theme (#1B8F4A), Poppins font, rounded corners, soft shadows
- **Tech stack:** React, TypeScript, React Router, Motion animations, Tailwind CSS v4, Radix UI components
- **Mobile-first:** Phone frame wrapper, responsive design, bottom navigation

ACTUAL APP IMAGES

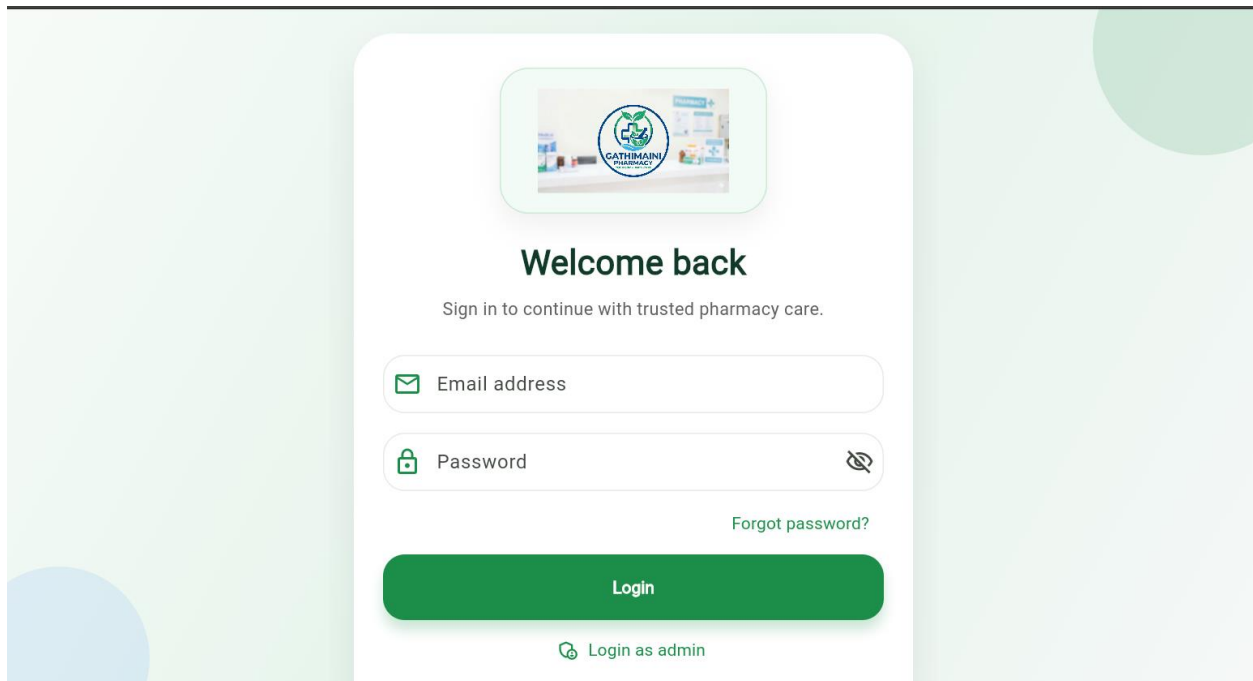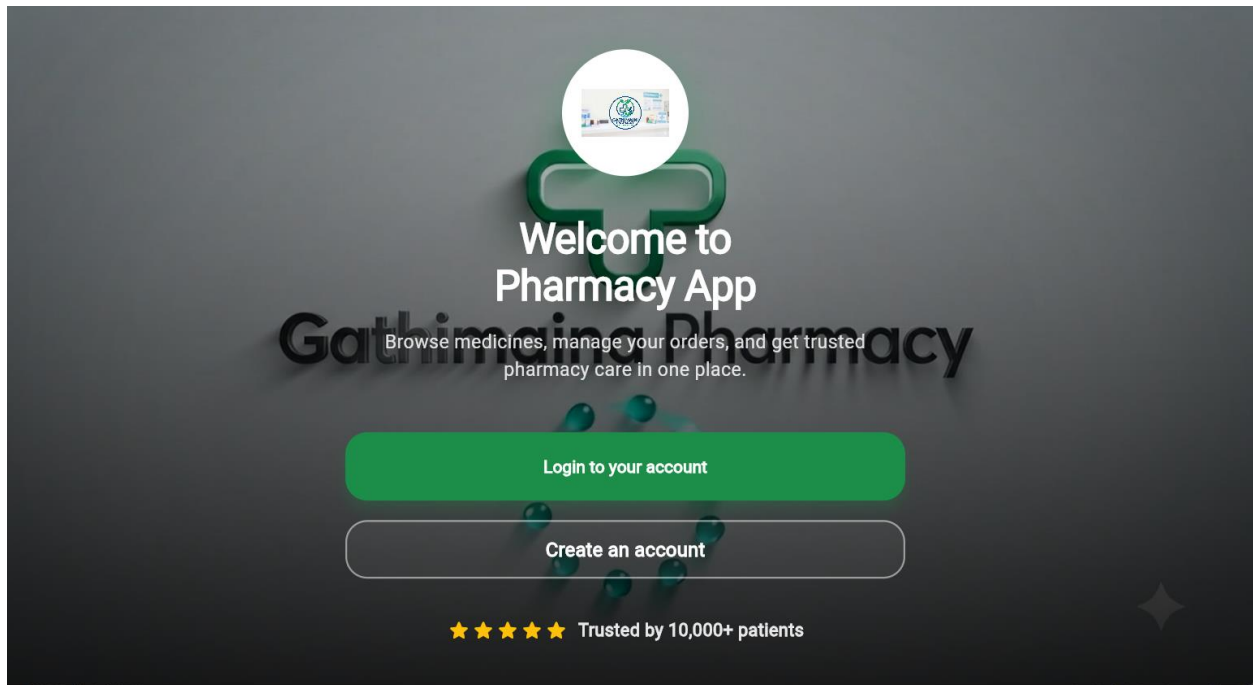



Good evening, Sheila 🌞
Trusted medicine & wellness products



Pain Relief



Vitamins



Baby Care



Skincare



Supplements



First Aid

Popular medicines

See more

High-trust products chosen for everyday care.

In stock



Pain relief

Paracetamol 500mg

Pain reliever and fever reducer.

In stock



Antibiotics

Amoxicillin 250mg

Antibiotic for bacterial

In stock



Allergy

Cetirizine 10mg

Allergy relief (antihistamine).

In stock



Special offer

Wellness Pack

Essential vitamins + hydration

In stock



Limited time

Family First Aid Kit

Everyday care bundle for home



Home



Search



Cart



Orders



Profile

Your cart



Wellness Pack

Special offer

— 1 +

Ksh 1890.00

Ksh 1890.00 each



Family First Aid Kit

Limited time

— 1 +

Ksh 2420.00

Ksh 2420.00 each

Subtotal

Ksh 6584.00

Delivery fee

Ksh 299.00

Total

Ksh 6883.00



Proceed to checkout

← Checkout

123 Main Street, Springfield, 560001



Phone

+1 202 555 0199



Delivery ETA

30-45 min

Payment method



Cash on Delivery



Credit / Debit Card



Mobile Wallet



Confirm order