	Prepared By / Last Updated By	Reviewed By	Approved By
Name			
Role			
Signature			
Date			

### **Table of Contents**

1.0 Introduction	3
1.1 Purpose	3
1.2 Definitions & Acronyms	3
1.3 Project Overview	3
1.4 Scope	3
1.5 Target Audience	4
1.6 Hardware and Software Requirements	4
1.6.1 Hardware Requirements	4
1.6.2 Software Requirements	4
2.0 Functional Requirements	4
2.1 Functional Requirements	4
2.2 Use case Diagram	5
2.3 System Architecture Diagram	6
3.0 Design Specification	6
3.1 Data Design	6
3.2 Component Design for identified Use cases	7
3.2.1 Parse data and generate the average annual rainfall for all the cities	7
3.2.2 Extract the names of the cities with heavy rainfall	11
3.3 General Design Constraints	12
4.0 Submission	12
4.1 Code submission instructions	12
5.0 Change Log	12

## 1.0 Introduction

### 1.1 Purpose of this document

The Meteorological Department did an analysis of the rainfall in different cities over a period of one year. They had a bunch of records which had the average monthly rainfall of every month in all those cities. As a result of their analysis, they needed to generate a report of the cities which received heavy rainfall by calculating the average annual rainfall based on each city manually. To do away with the manual tasks, they now want to automate all the above-mentioned processes. Help them to automate this report generation process.

The Meteorological Department has the following tasks that must be automated.

Parse data and calculate the average annual rainfall of all the cities
 Extract the names of the cities with heavy rainfall

### 1.2 Definitions & Acronyms

Definition / Acronym	Description
Nil	

# 1.3 Project Overview

This project captures the various concepts, techniques and skills learned and help to put them into practice using Java with JDBC which a software engineer must be good at. Admittedly, this would be at a scaled-down level since the purpose is to let the associate experience the various concepts learned in Java as an individual. The individual associate is expected to carry out the knock out challenge and complete it within 4 hours.

### 1.4 Scope

The scope of the system is explained through its following modules

- 1. Parse data and calculate the average annual rainfall of all cities
- 2. Extract the names of the cities with heavy rainfall

# 1.5 Target Audience

Learner Level

# 1.6 Hardware and Software Requirements

### 1.6.1 Hardware Requirements

#	Item	Specification/Version	

## 1.6.2 Software Requirements

#	Item	Specification/Version
1.	Java	8
2.	MYSQL	5.1

Note: All the required hardware and software is provided in the TekStac platform


# 2.0 Functional Requirements

# 2.1 Functional Requirements


Req. #	Req. Name	Req. Description	Actors / Users	Comments
1	Parse data and calculate the average annual rainfall of all cities	The average monthly rainfall in each city and the other details of the city are stored in a flat file. Retrieve the data from the file and calculate the average annual rainfall for each city based on its monthly rainfall.	Admin	The admin of the meteorological department is responsible for parsing the data and calculating the average annual rainfall for all the cities

2	Extract the names of the cities with	The average annual rainfall of each city is stored in the	Admin	The admin of the meteorological
	heavy rainfall	database, the meteorological		department is
	neavy railinaii	department will find the maximum rainfall value and display the city details which has the maximum rainfall from the database.		responsible for retrieving the average annual rainfall of each city from the database and
				Identifying the cities with the maximum rainfall

# 2.2 Use case Diagram

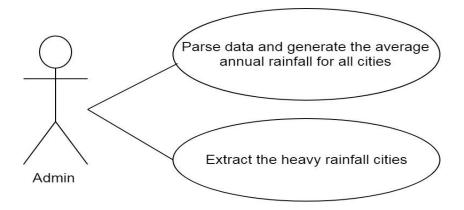

# 2.3 System Architecture Diagram

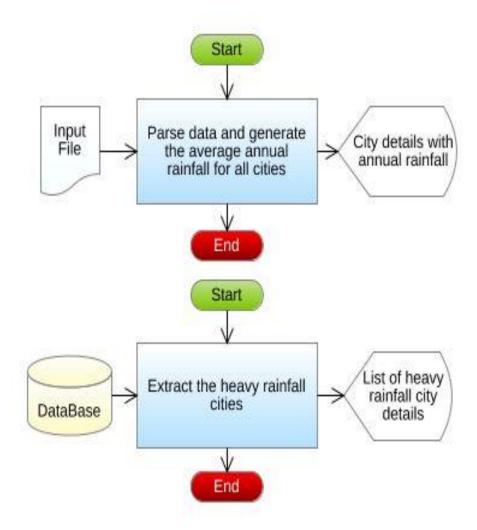

# 3.0 Design Specification

# 3.1 Data Design

#### **Table Structure:**

Table name: AnnualRainfall				
Column Name	Data type			
city_pincode	number			
city_name	varchar			
average_annual_rainfall double				

#### **Design Constraints:**

- Use MYSQL database to store the data. The database name should be "RainfallReport".
- The above table has been already created. To create the table in your local machine, the script is available in "script.sql", which will be provided as part of the code skeleton.
- The table names and the column names should be the same as specified in the table structure.
- Database connections should be configurable; it should not be hard coded. The database information is specified in the "db.properties" file, which is also provided as part of the code skeleton.

**Note:** The code skeleton is available in the Tekstac platform

### 3.2 Component Design for identified Use cases

# 3.2.1 Parse data and generate the average annual rainfall for all cities

The average monthly rainfall in each city and the other details of the city are stored in a flat file. Retrieve the data from the file and calculate the average annual rainfall of each city based on its monthly rainfall. The details of the cities with the rainfall details are stored in a file named AllCityMonthlyRainfall.txt.

Sample File containing rainfall details. The file is comma delimited.

#### [AllCityMonthlyRainfallFormat:

cityPincode,cityName,JanRainfall,FebRainfall,MarRainfall,AprRainfall,MayRainfall,JunRainfall,AugRainfall,SepRainfall,OctRainfall,NovRainfall,DecRainfall

```
AllCityMonthlyRainfall.txt - Notepad

File Edit Format View Help

10002, New York, 24, 15, 17, 16, 11, 10, 9, 4, 24, 36, 40, 32
99501, Alaska, 14, 24, 36, 40, 27, 16, 15, 34, 15, 10, 9, 32
20019, Washington, 11, 20, 12, 20, 10, 15, 20, 21, 19, 10, 11, 12
30381, Atlanta, 25, 26, 23, 20, 21, 22, 21, 21, 20, 19, 18, 11
27565, Oxford, 6, 7, 11, 14, 9, 8, 14, 15, 9, 9, 10, 11
85054, Phoenix, 12, 11, 12, 11, 10, 14, 15, 14, 15, 12, 10, 19
90080, Los Angeles, 6, 5, 4, 5, 4, 5, 6, 8, 4, 5, 9, 4
```

From the AllCityMonthlyRainfall.txt file, read the details, parse the data and construct an AnnualRainfall object for each record in the file, then calculate the averageAnnualRainfall of each city based on the conditions mentioned below:

Average Annual Rainfall = (sum of all monthly rainfall of a city)/number of months

For example: If the city has a monthly rainfall as

30, 15.5, 12, 10, 15, 20.9, 21, 22, 20, 18.6, 15, 10

then the averageAnnualRainfall will be

(30+15.5+12+10+15+20.9+21+22+20+18.6+15+10)/12, which is 210/12 = 17.5

Therefore, the averageAnnualRainfall of that city is 17.5

After calculating the averageAnnualRainfall, store all the AnnualRainfall object into a list.

#### Validation:

The city Pincode should contain exactly 5 digits. If the city Pincode is valid then parse the data and calculate the average annual rainfall else throw a user defined Exception "InvalidCityPincodeException" with a message "Invalid City Pincode".

#### **Component Specification: AnnualRainfall(model class)**

Compo nent Name	Type(Class)	Attributes	Methods	Responsi bilities
Parse data and calculat e the average annual rainfall of all cities	AnnualRainfall	int cityPincode String cityName double averageAnnualRainfall	Include getters and setter method for all the attributes.	
Parse data and calculat	AnnualRainfall		void calculateAvera geAnnualRainf all (double	This method should calculate

e the		monthlyRainfa	and set the	
average		II [ ] )	averageAn	
annual			nualRainfal	
rainfall			I based on	
of all			the	
cities			monthly	
			rainfall	
			the city	
			received	

## RainfallReport(utility class)

Compo nent Name	Type(Class)	Method	Responsibi lities	Exception
Parse data and calculat e the average annual rainfall of all cities	RainfallReport	List <annualrainfall>ge nerateRainfallReport(S tring filePath)</annualrainfall>	This method takes the file path as argument and it should parse the data stored in the file and it should validate the city Pin code by invoking the validate() method, if valid, construct an AnnualRainf all object for each record in the file,	

	T	Г	Ι.	
			then	
			calculate	
			the average	
			annual	
			rainfall by	
			invoking	
			the	
			calculateAv	
			erageAnnua	
			lRainfall(do	
			uble	
			monthlyRai	
			nfall [])	
			method of	
			AnnualRainf	
			all class.	
			After	
			calculating	
			the	
			averageAnn	
			ualRainfall, each	
			AnnualRainf	
			all should	
			be added	
			into the list	
			and this method	
			should	
			return the	
			list of	
			AnnualRainf	
			all.	
Parse	PainfallBonart	hooloan validata/Ctrina	This method	Throw a user
	RainfallReport	boolean validate(String	should	defined
data		cityPincode)	validate the	
and calculat			city pincode,	exception "Invalid
_			if valid	CityPincode
			return true	Exception" if
average annual			else this	the pincode
rainfall			method	is invalid.
of all			should throw	is ilivallu.
cities			an	
Cities			userdefined	
			exception	
		hoth valid and invalid date	•	

Note: The data file will contain both valid and invalid details. Valid rainfall details

should be added to the list and for the invalid ones, user defined exception should be thrown.

## 3.2.2 Extract the names of the cities with heavy rainfall

The averageAnnualRainfall of each city is stored in the database, the meteorological department will find the maximumRainfall value and display the city details which received the maximumRainfall from the database.

#### **Component Specification:**

#### RainfallReport(utility class)

Compon ent Name	Type(Clas s)	Method	Responsibilities	Resource s
Extract the names of the cities with heavy rainfall	RainfallRe	List <annualrainfall> findMaximumRainfa IICities ()</annualrainfall>	This method should extract all the AnnualRainfall details from the AnnualRainfall table and return the list of cities with maximum averageAnnualRa infall.  Connect to the database by invoking the establishConnecti on() method of DBHandler class.	MYSQL database is used. Retrieve the details from AnnualRai nfall table

#### **DBHandler(DAO class)**

Compone nt Name	Type(Clas s)	Method	Responsibiliti es	Resources
Extract the	DBHandler	Connection	This method	MYSQL
names of		establishConnectio	should connect	database is

the cities with heavy rainfall	n()	to the database by reading the database details from the db.properties file and it should return the connection object	used. Store and retrieve the details into/from AnnualRainf all table.  db.propertie s file is used for storing the

## 3.3 General Design Constraints

- 1. The attribute/method/class name should be correctly specified as given in the document.
- 2. Do not hardcode the database configuration details in the DBHandler class, read it from the db.properties file.

# 4.0 Submission

### 4.1 Code submission instructions

- 1. Do not change the code skeleton given, as your code will be auto evaluated.
- 2. You can validate your solution against sample test cases during the assessment duration.
- 3. Your last submitted solution will be considered for detailed evaluation.
- 4. Make sure to submit the solution before the specified time limit. You will not be allowed to submit the solution once the mentioned time for the assessment is over.

# 5.0 Change Log

	Changes Made		
V1.0.0	Initial baseline created on <dd-mon-yy> by <name author="" of=""></name></dd-mon-yy>		

Vx.y.z	<please are="" be="" below="" change="" changes="" configuration="" control="" details="" followed="" form="" given="" if="" item="" maintained="" needs="" not,="" of="" refer="" separately.="" status="" template="" the="" to="" tool=""></please>			
	Section No.	Changed By	Effective Date	Changes Effected