


Power Over Fiber Dual Camera Workflow Diagram

V0.1


NOTICE

- 1. All FPGA modules should use Non-Free Running Clock.
- 2. Hyper RAM needs data integrity testing.

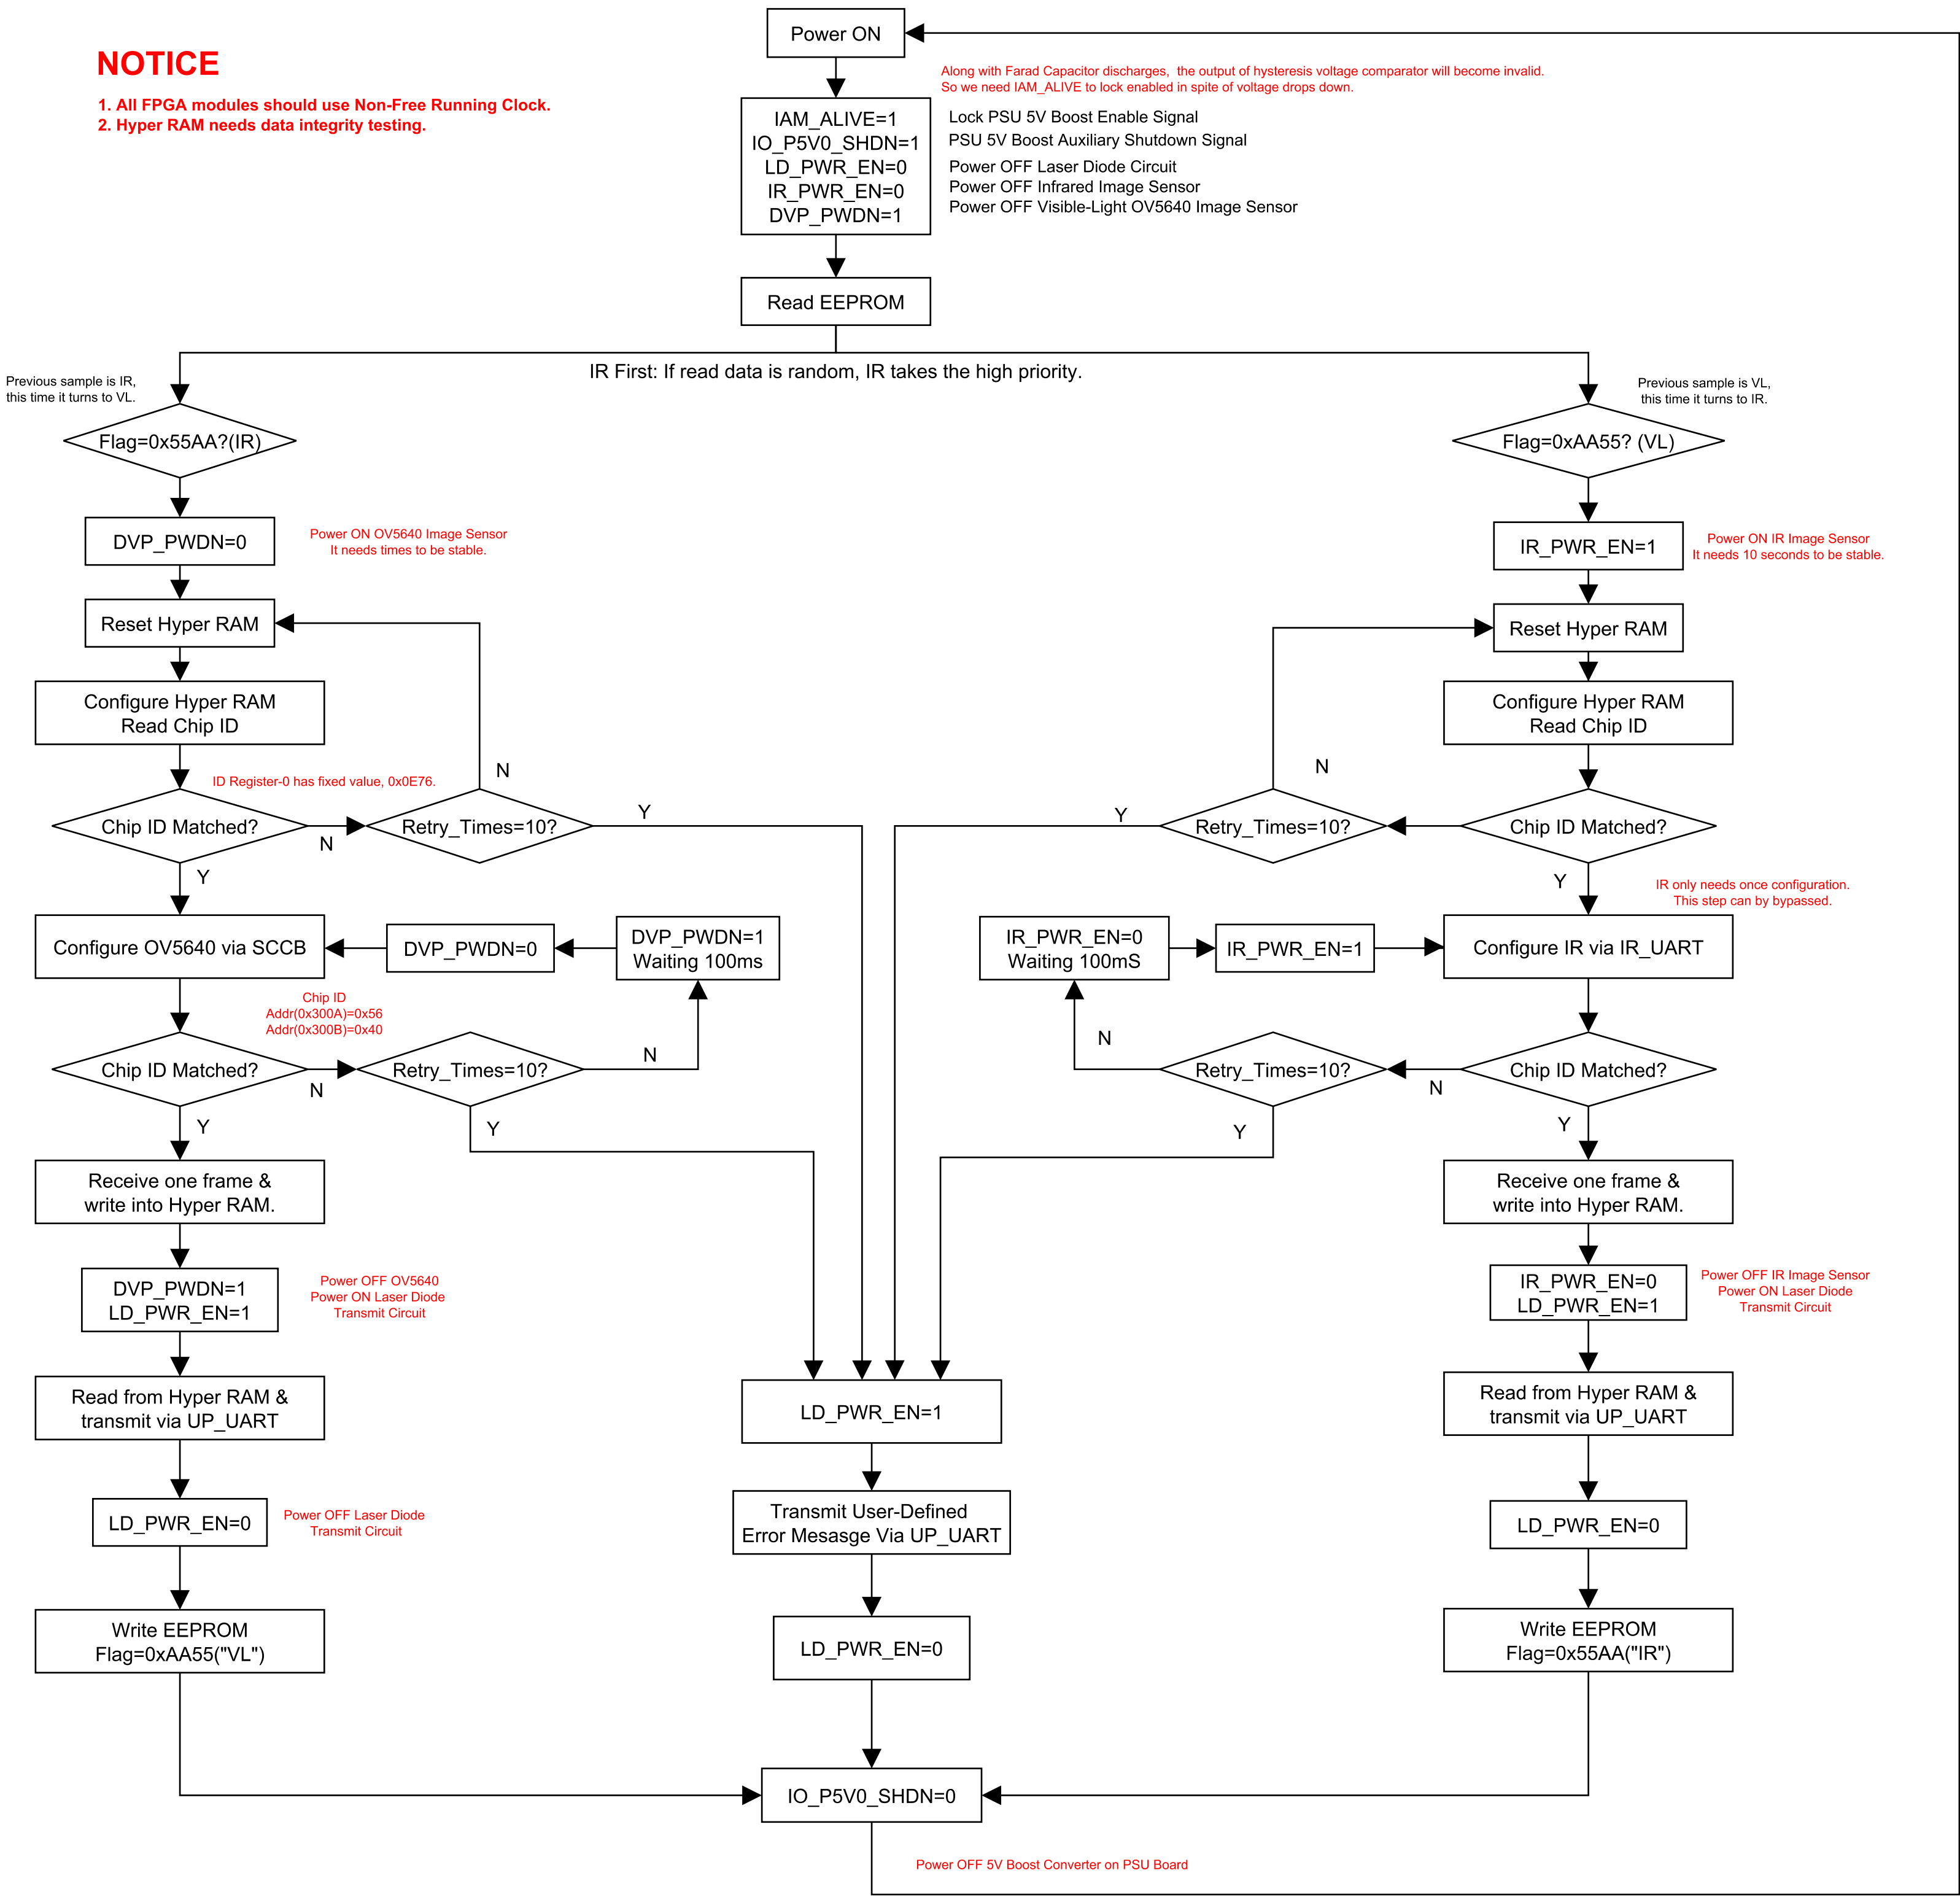

IR Frame Structure and Byte Field Size

Frame Length includes all bytes of one frame, excepts itself.

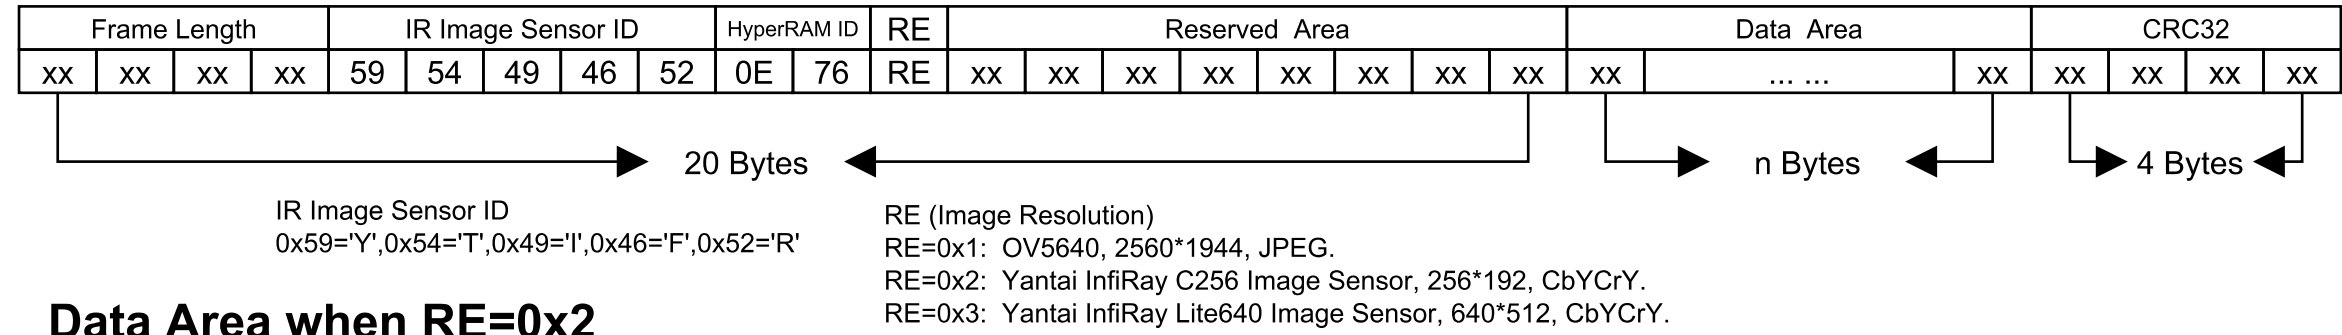


Data Area when RE=0x2

	Line Leading Head (16 Bytes)																Image Area (256*2 Bytes)						Temperature Area (256*2 Bytes)					
Line-0	FF	00	00	B6	FF	00	00	AB	FF	00	00	9D	FF	00	00	80	Cb	Y	Cr	Y	...	...	Temp(7.0)	Temp(15.8)	Temp(7.0)	Temp(15.8)	...	...
Line-1	FF	FF	FF	FF	00	00	00	01	FF	00	00	9D	FF	00	00	80	Cb	Y	Cr	Y	...	...	Temp(7.0)	Temp(15.8)	Temp(7.0)	Temp(15.8)	...	...
Line-2	FF	FF	FF	FF	00	00	00	02	FF	00	00	9D	FF	00	00	80	Cb	Y	Cr	Y	...	...	Temp(7.0)	Temp(15.8)	Temp(7.0)	Temp(15.8)	...	...
Line-3	FF	FF	FF	FF	00	00	00	03	FF	00	00	9D	FF	00	00	80	Cb	Y	Cr	Y	...	...	Temp(7.0)	Temp(15.8)	Temp(7.0)	Temp(15.8)	...	...
	...																											
Line-190	FF	FF	FF	FF	00	00	00	BE	FF	00	00	9D	FF	00	00	80	Cb	Y	Cr	Y	...	...	Temp(7.0)	Temp(15.8)	Temp(7.0)	Temp(15.8)	...	...
Line-191	FF	FF	FF	FF	00	00	00	BF	FF	00	00	9D	FF	00	00	80	Cb	Y	Cr	Y	...	...	Temp(7.0)	Temp(15.8)	Temp(7.0)	Temp(15.8)	...	...

Data Area when RE=0x3

	Line Leading Head (16 Bytes)																Image Area (640*2 Bytes)					Temperature Area (640*2 Bytes)						
Line-0	FF	00	00	B6	FF	00	00	AB	FF	00	00	9D	FF	00	00	80	Cb	Y	Cr	Y	...	Temp(7.0)	Temp(15.8)	Temp(7.0)	Temp(15.8)	...		
Line-1	FF	FF	FF	FF	00	00	00	01	FF	00	00	9D	FF	00	00	80	Cb	Y	Cr	Y	...	Temp(7.0)	Temp(15.8)	Temp(7.0)	Temp(15.8)	...		
Line-2	FF	FF	FF	FF	00	00	00	02	FF	00	00	9D	FF	00	00	80	Cb	Y	Cr	Y	...	Temp(7.0)	Temp(15.8)	Temp(7.0)	Temp(15.8)	...		
Line-3	FF	FF	FF	FF	00	00	00	03	FF	00	00	9D	FF	00	00	80	Cb	Y	Cr	Y	...	Temp(7.0)	Temp(15.8)	Temp(7.0)	Temp(15.8)	...		
	...																											
Line-510	FF	FF	FF	FF	00	00	01	FE	FF	00	00	9D	FF	00	00	80	Cb	Y	Cr	Y	...	Temp(7.0)	Temp(15.8)	Temp(7.0)	Temp(15.8)	...		
Line-511	FF	FF	FF	FF	00	00	01	FF	FF	00	00	9D	FF	00	00	80	Cb	Y	Cr	Y	...	Temp(7.0)	Temp(15.8)	Temp(7.0)	Temp(15.8)	...		

VL Frame Structure and Byte Field Size

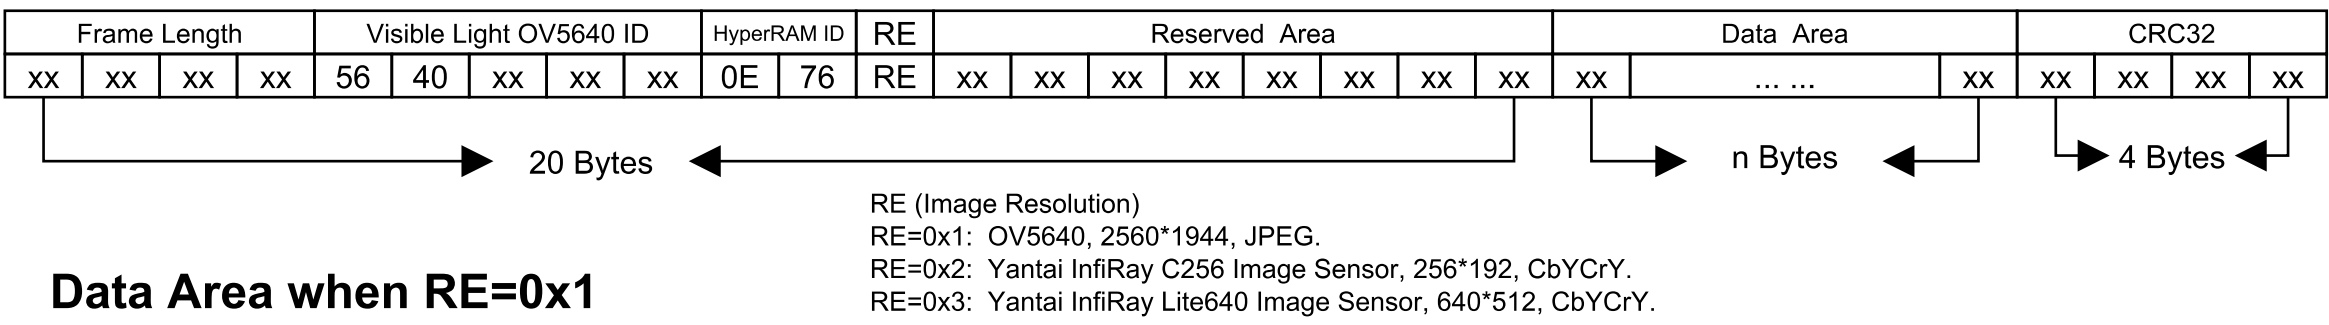

Data Area when RE=0x1

FF	D8	...	...	...	...	FF	D9
----	----	-----	-----	-----	-----	----	----

Error Frame Structure and Byte Field Size

