


1. תרשים ERD

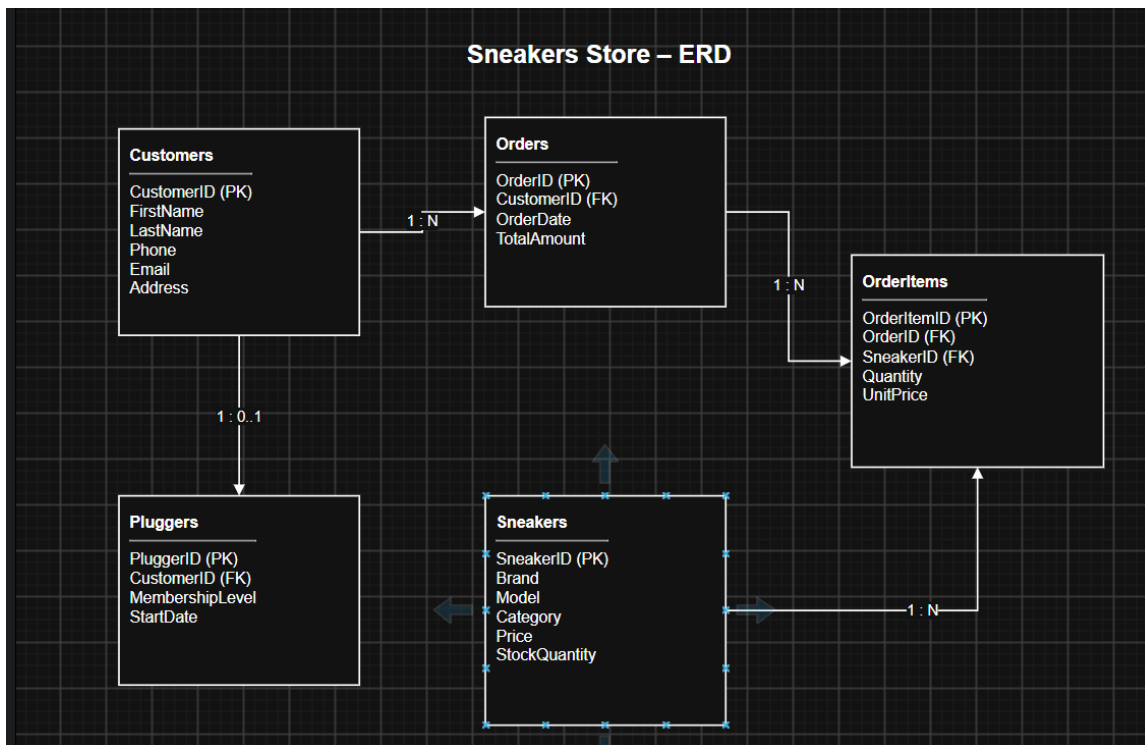

ישויות:

1. לקוחות
2. לקוחות מיוחדים
3. נעליים
4. הזמנות

2. המודל הטבלאי

Customers (CustomerID, FirstName, LastName, Phone, Email, Address)

Pluggers (PlugggerID, CustomerID {Customers}, MembershipLevel, StartDate)

Sneakers (SneakerID, Brand, Model, Category, Price, StockQuantity)

Orders (OrderID, CustomerID, OrderDate, TotalAmount)

OrderItems (OrderItemID, OrderID {Orders}, SneakerID {Sneakers}, Quntity, UnitPrice)

3. נרמול

Customers (CustomerID, FirstName, LastName, Phone, Email)


Address (CustomerID {Customers}, Address)

Pluggers (PlugggerID, CustomerID {Customers}, MembershipLevel, StartDate)

Sneakers (SneakerID, Brand, Model, Category, Price, StockQuantity)

Orders (OrderID, CustomerID, OrderDate, TotalAmount)

OrderItems (OrderItemID, OrderID {Orders}, SneakerID {Sneakers}, Quantity, UnitPrice)

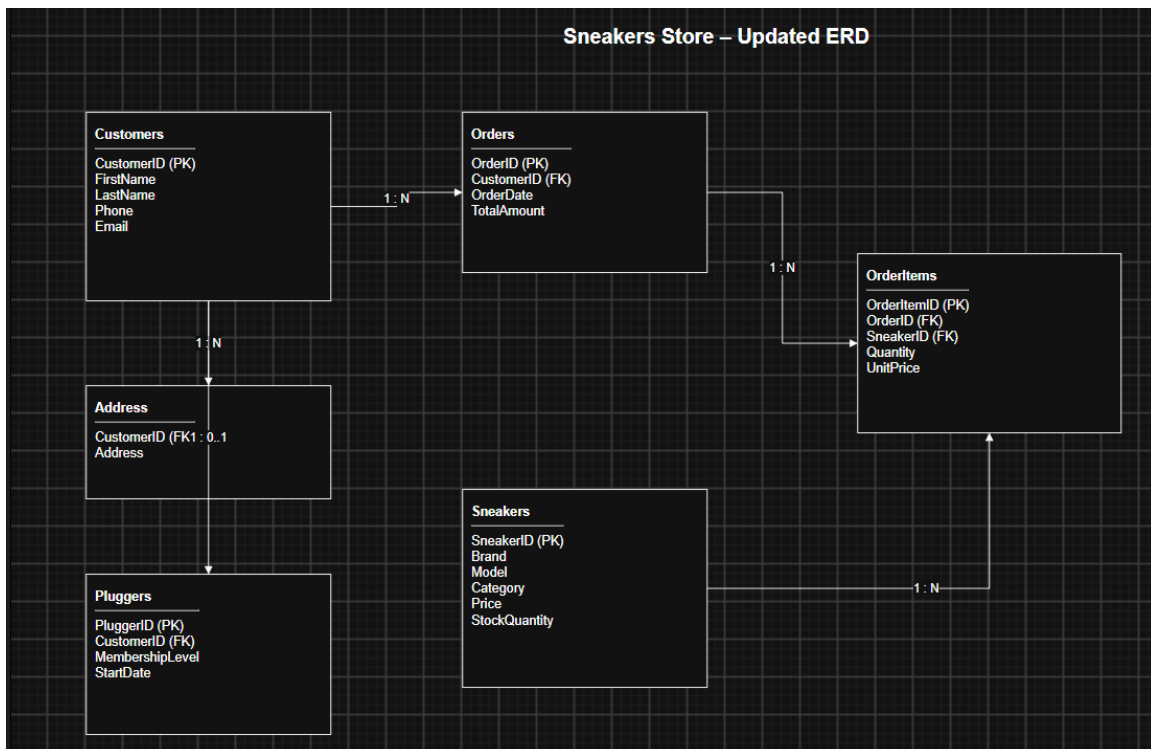

DDL – Data Definition Language .4

```
CREATE TABLE Customers (  
    CustomerID INT PRIMARY KEY,  
    FirstName VARCHAR(50),  
    LastName VARCHAR(50),  
    Phone VARCHAR(20),  
    Email VARCHAR(100)  
);
```

```
CREATE TABLE Address (  
    CustomerID INT,  
    Address VARCHAR(100),  
    FOREIGN KEY (CustomerID) REFERENCES Customers(CustomerID)  
);
```

```
CREATE TABLE Pluggers (  
    PluggerID INT PRIMARY KEY,  
    CustomerID INT,  
    MembershipLevel VARCHAR(50),  
    StartDate DATE,  
    FOREIGN KEY (CustomerID) REFERENCES Customers(CustomerID)  
);
```

```
CREATE TABLE Sneakers (  
    SneakerID INT PRIMARY KEY,  
    Brand VARCHAR(50),  
    Model VARCHAR(50),  
    Category VARCHAR(50),  
    Price DECIMAL(10,2),  
    StockQuantity INT  
);
```

```
CREATE TABLE Orders (  
    OrderID INT PRIMARY KEY,  
    CustomerID INT,  
    OrderDate DATE,  
    TotalAmount DECIMAL(10,2),  
    FOREIGN KEY (CustomerID) REFERENCES Customers(CustomerID)  
);
```

```
CREATE TABLE OrderItems (  
    OrderItemID INT PRIMARY KEY,  
    OrderID INT,  
    SneakerID INT,  
    Quantity INT,  
    UnitPrice DECIMAL(10,2),  
    FOREIGN KEY (OrderID) REFERENCES Orders(OrderID),  
    FOREIGN KEY (SneakerID) REFERENCES Sneakers(SneakerID)  
);
```

DML – Data Manipulation Language

INSERT INTO Customers

(CustomerID, FirstName, LastName, Phone, Email)

VALUES

(1, 'Dana', 'Cohen', '0501234567', 'dana@email.com'),

(2, 'Noa', 'Levi', '0521234567', 'noa@email.com');

INSERT INTO Address

(CustomerID, Address)

VALUES

(1, 'Haifa'),

(1, 'Tel Aviv'),

(2, 'Jerusalem');

INSERT INTO Pluggers

(PluggerID, CustomerID, MembershipLevel, StartDate)

VALUES

(1, 1, 'Gold', '2026-01-15');

INSERT INTO Sneakers

(SneakerID, Brand, Model, Category, Price, StockQuantity)

VALUES

(1, 'Nike', 'Air Max', 'Running', 499.90, 20),

(2, 'Adidas', 'Samba', 'Lifestyle', 399.90, 15);

```
INSERT INTO Orders
```

```
(OrderID, CustomerID, OrderDate, TotalAmount)
```

```
VALUES
```

```
(1, 1, '2026-08-20', 899.80),
```

```
(2, 2, '2026-08-21', 399.90);
```

```
INSERT INTO OrderItems
```

```
(OrderItemID, OrderID, SneakerID, Quantity, UnitPrice)
```

```
VALUES
```

```
(1, 1, 1, 1, 499.90),
```

```
(2, 1, 2, 1, 399.90),
```

```
(3, 2, 2, 1, 399.90);
```