Lab – 20
ECS and ECR

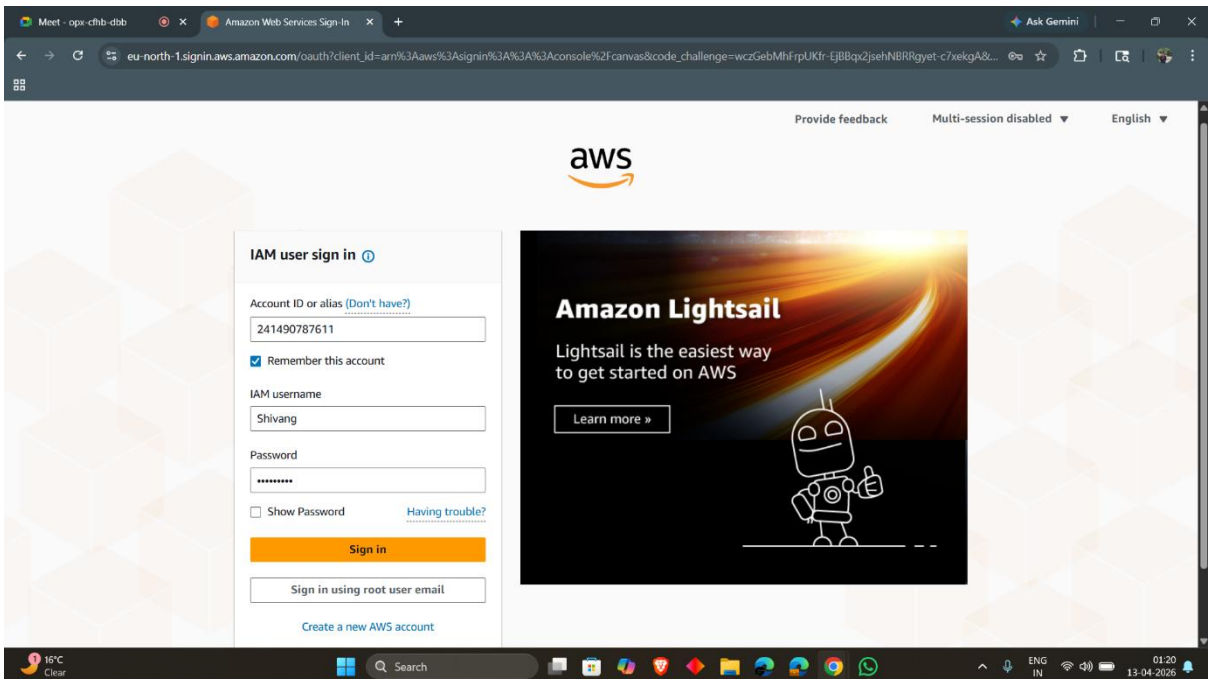

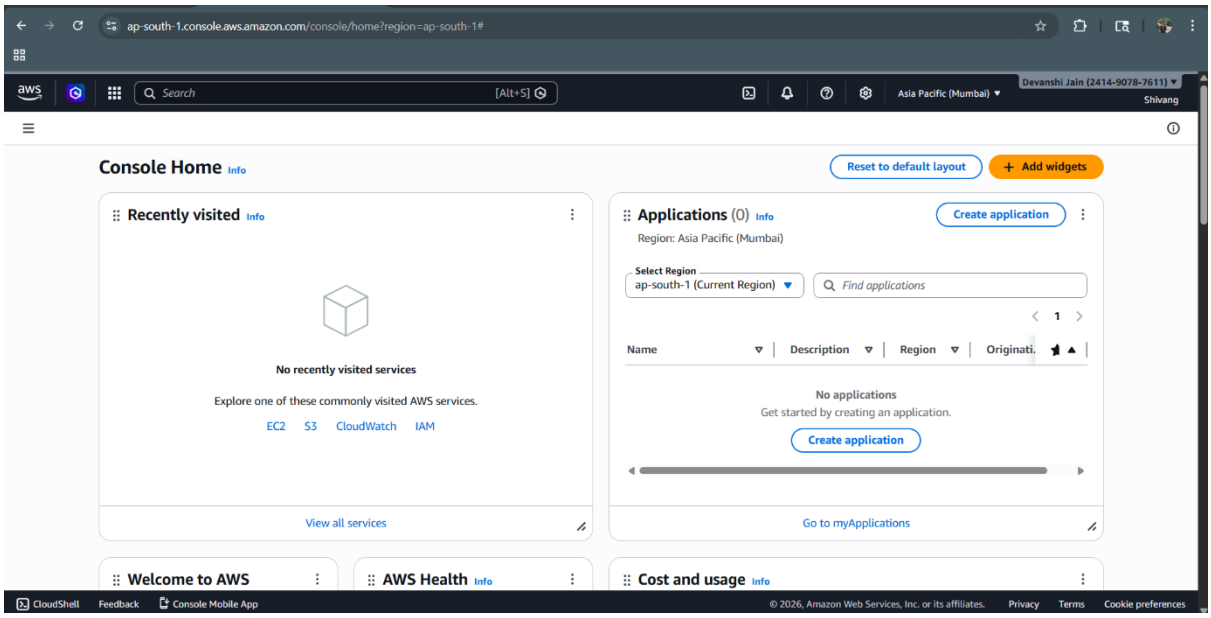

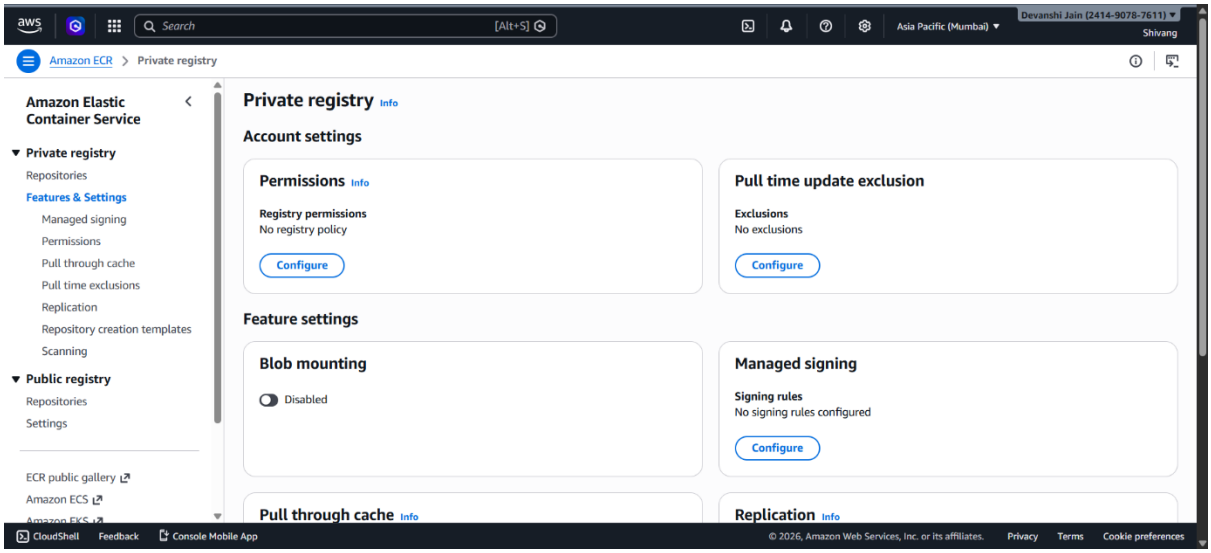
Amazon ECR > Private registry
Amazon Elastic Container Service
Private registry
Repositories
Features & Settings
Managed signing
Permissions
Pull through cache
Pull time exclusions
Replication
Repository creation templates
Scanning
Public registry
Repositories
Settings
ECR public gallery
Amazon ECS
Private registry Info
Account settings
Permissions Info
Registry permissions
No registry policy
Configure
Pull time update exclusion
Exclusions
No exclusions
Configure
Feature settings
Blob mounting
Disabled
Managed signing
Signing rules
No signing rules configured
Configure
Pull through cache Info
Replication Info

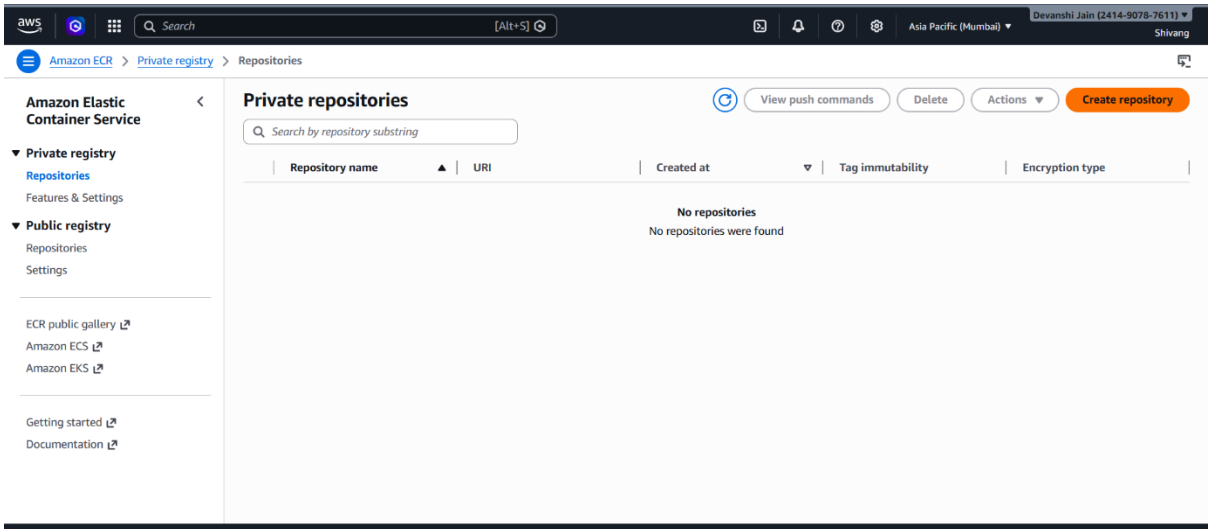
Amazon ECR > Private registry > Repositories
Amazon Elastic Container Service
Private registry
Repositories
Features & Settings
Public registry
Repositories
Settings
ECR public gallery
Amazon ECS
Amazon EKS
Getting started
Documentation
Private repositories
View push commands
Delete
Actions
Create repository
Search by repository substring
Repository name
URI
Created at
Tag immutability
Encryption type
No repositories
No repositories were found

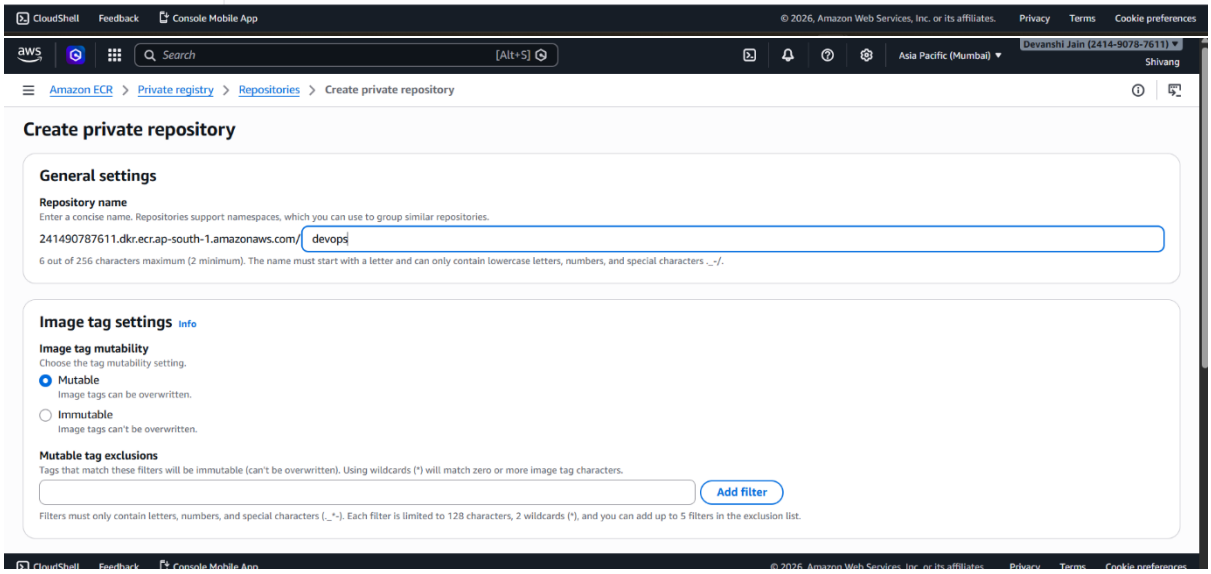
Amazon ECR > Private registry > Repositories > Create private repository
Create private repository
General settings
Repository name
Enter a concise name. Repositories support namespaces, which you can use to group similar repositories.
241490787611.dkr.ecr.ap-south-1.amazonaws.com/
devops
6 out of 256 characters maximum (2 minimum). The name must start with a letter and can only contain lowercase letters, numbers, and special characters _-/.
Image tag settings Info
Image tag mutability
Choose the tag mutability setting.
Mutable
Image tags can be overwritten.
Immutable
Image tags can't be overwritten.
Mutable tag exclusions
Tags that match these filters will be immutable (can't be overwritten). Using wildcards (*) will match zero or more image tag characters.
Add filter
Filters must only contain letters, numbers, and special characters (_*-). Each filter is limited to 128 characters, 2 wildcards (*), and you can add up to 5 filters in the exclusion list.

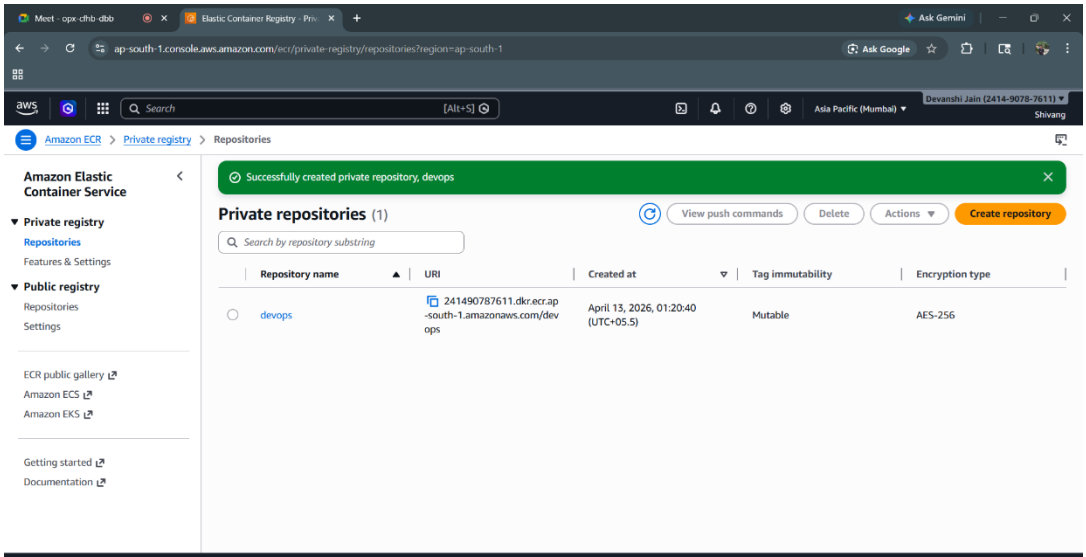
Successfully created private repository, devops
Private repositories (1)
View push commands
Delete
Actions
Create repository
Repository name
URI
Created at
Tag immutability
Encryption type
devops
241490787611.dkr.ecr.ap-south-1.amazonaws.com/devops
April 13, 2026, 01:20:40 (UTC+05.5)
Mutable
AES-256

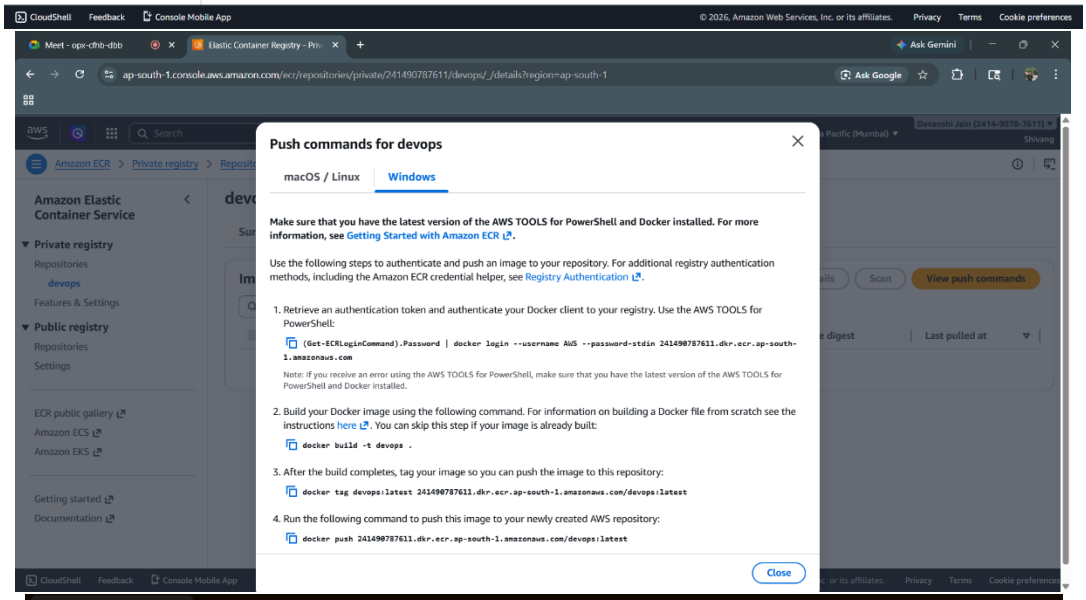
Push commands for devops
macOS / Linux
Windows
Make sure that you have the latest version of the AWS TOOLS for PowerShell and Docker installed. For more information, see Getting Started with Amazon ECR.
Use the following steps to authenticate and push an image to your repository. For additional registry authentication methods, including the Amazon ECR credential helper, see Registry Authentication.
1. Retrieve an authentication token and authenticate your Docker client to your registry. Use the AWS TOOLS for PowerShell:
(Get-ECRLoginCommand).Password | docker login --username AWS --password-stdin 241490787611.dkr.ecr.ap-south-1.amazonaws.com
Note: If you receive an error using the AWS TOOLS for PowerShell, make sure that you have the latest version of the AWS TOOLS for PowerShell and Docker installed.
2. Build your Docker image using the following command. For information on building a Docker file from scratch see the instructions here. You can skip this step if your image is already built:
docker build -t devops .
3. After the build completes, tag your image so you can push the image to this repository:
docker tag devops:latest 241490787611.dkr.ecr.ap-south-1.amazonaws.com/devops:latest
4. Run the following command to push this image to your newly created AWS repository:
docker push 241490787611.dkr.ecr.ap-south-1.amazonaws.com/devops:latest
Close

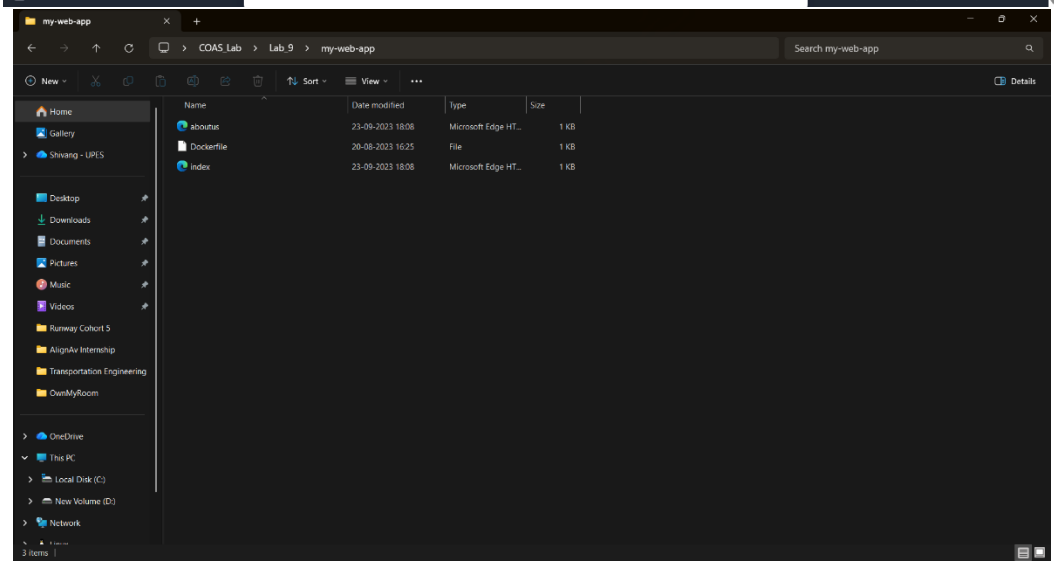
my-web-app
COAS_Lab
Lab_9
Name
Date modified
Type
Size
aboutus
Dockerfile
index
3 items

Shivang Mangal 500124202 Batch -2

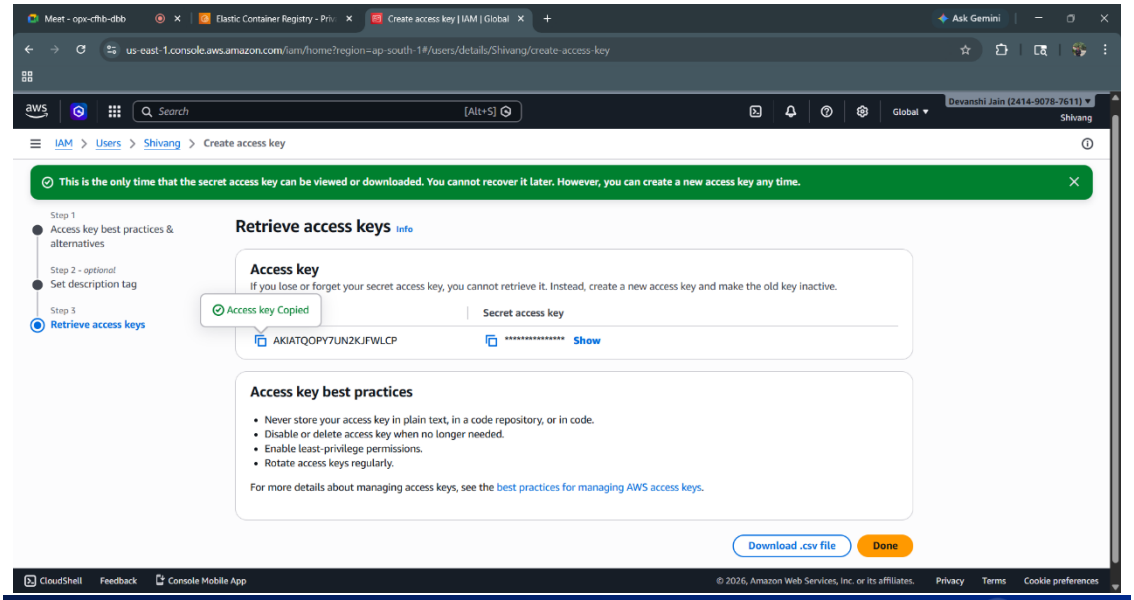

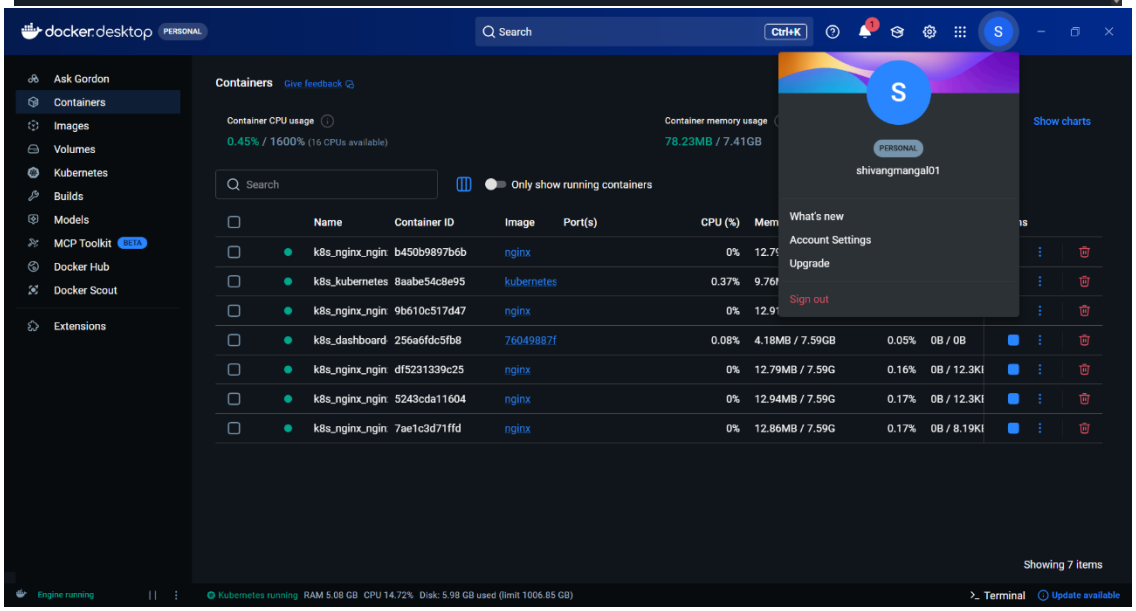

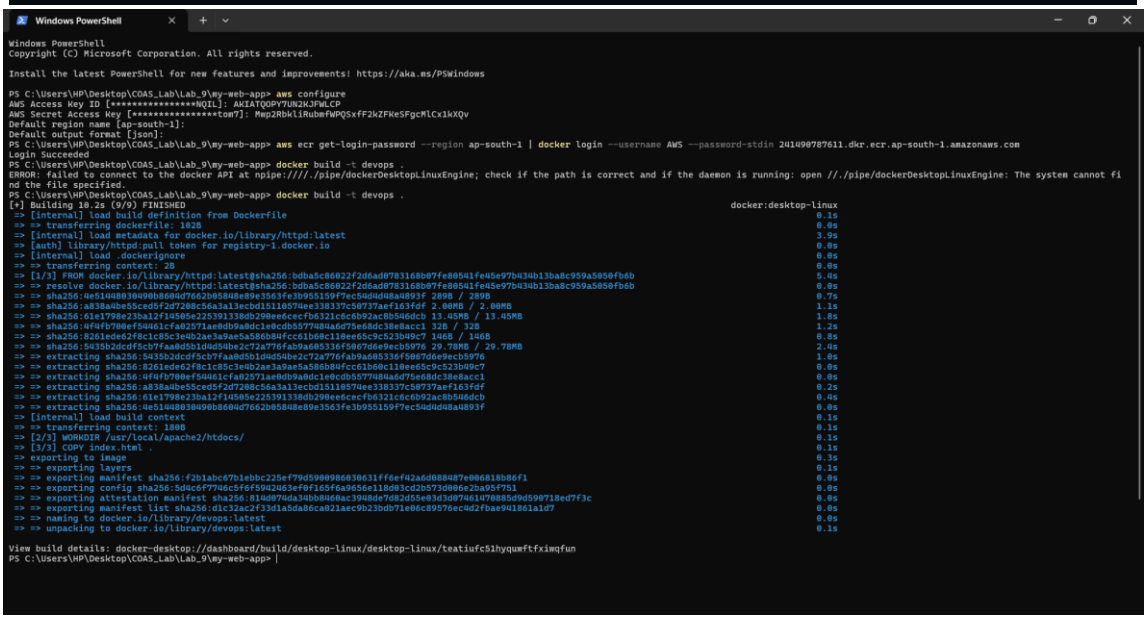

```
=> [2/3] WORKDIR /usr/local/apache2/htdocs/
                0.1s
=> [3/3] COPY index.html .
                0.1s
=> exporting to image
                0.3s
=> => exporting layers
                0.1s
=> => exporting manifest sha256:f2b1abc67b1ebbc225ef79d5900986030631ff6ef42a6d088487e006818b86f1
                0.0s
=> => exporting config sha256:5d4c6f7746c5f6f5942463ef0f165f6a9656e118d03cd2b573d006e2ba95f751
                0.0s
=> => exporting attestation manifest sha256:814d074da34bb8460ac3948de7d82d55e03d3d07461470885d9d590718ed7f3c
                0.0s
=> => exporting manifest list sha256:d1c32ac2f33d1a5da86ca021aec9b23bdb71e06c89576ec4d2fbae941861a1d7
                0.0s
=> => naming to docker.io/library/devops:latest
                0.0s
=> => unpacking to docker.io/library/devops:latest
                0.1s

View build details: docker-desktop://dashboard/build/desktop-linux/desktop-linux/teatiufc51hyquwftfxiwqfun
PS C:\Users\HP\Desktop\COAS_Lab\Lab_9\my-web-app> docker tag devops:latest 241490787611.dkr.ecr.ap-south-1.amazonaws.com/devops:latest
PS C:\Users\HP\Desktop\COAS_Lab\Lab_9\my-web-app> docker push 241490787611.dkr.ecr.ap-south-1.amazonaws.com/devops:latest
The push refers to repository [241490787611.dkr.ecr.ap-south-1.amazonaws.com/devops]
a838a4be55ce: Pushed
61e1798e23ba: Pushed
1fb8f03dca09: Pushed
f9c81c69f082: Pushed
4f4fb700ef54: Pushed
5435b2dcdf5c: Pushed
8261ede62f8c: Pushed
4e5144803049: Pushed
latest: digest: sha256:d1c32ac2f33d1a5da86ca021aec9b23bdb71e06c89576ec4d2fbae941861a1d7 size: 856
PS C:\Users\HP\Desktop\COAS_Lab\Lab_9\my-web-app>
```

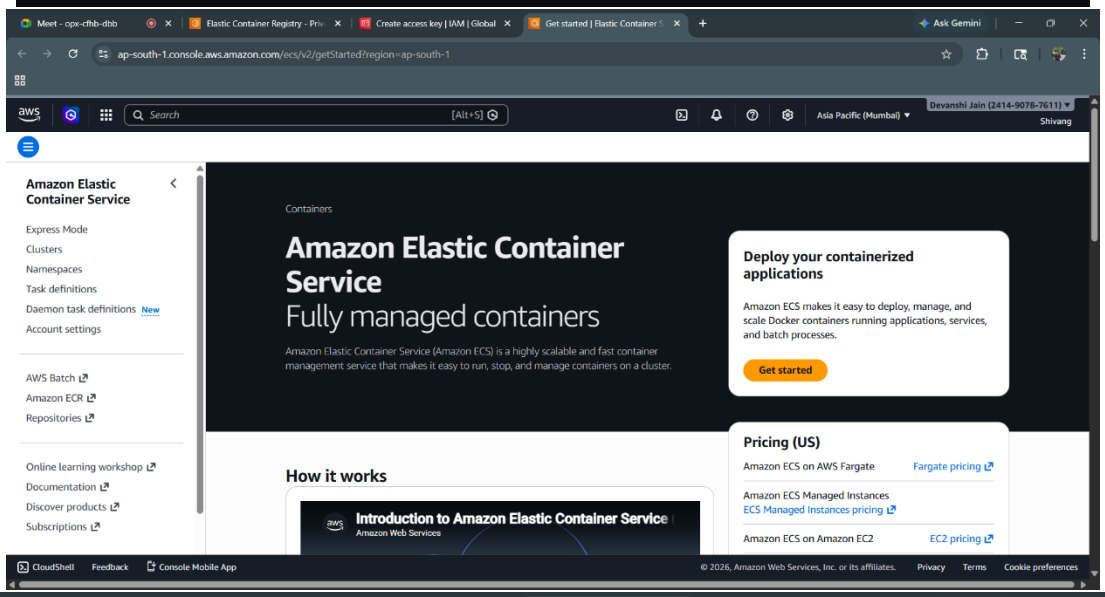

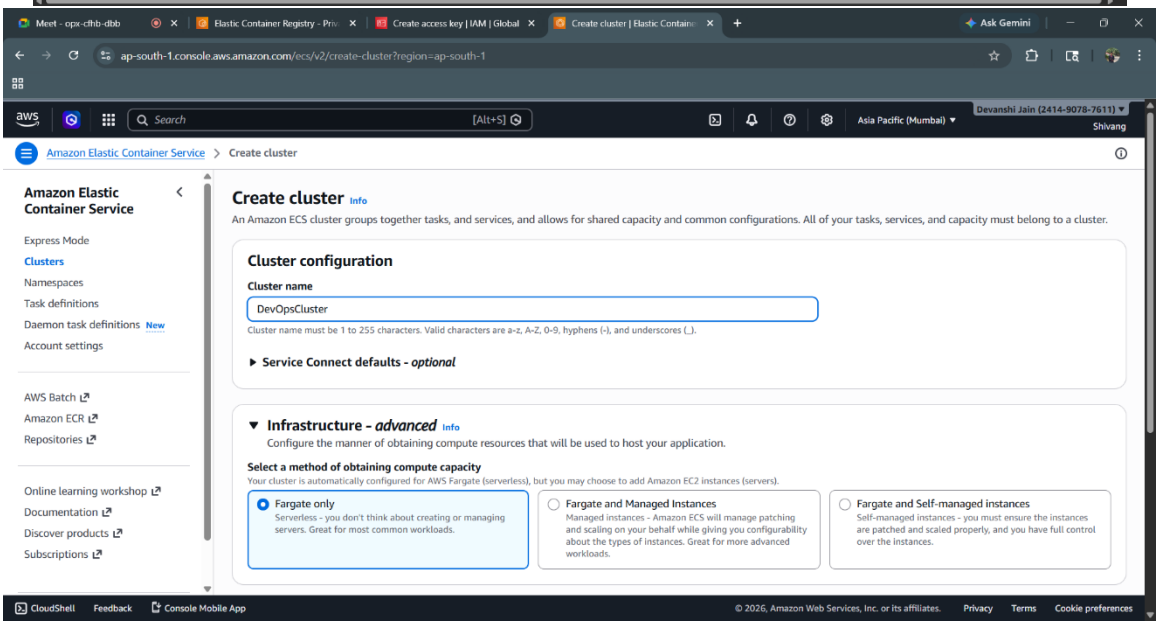

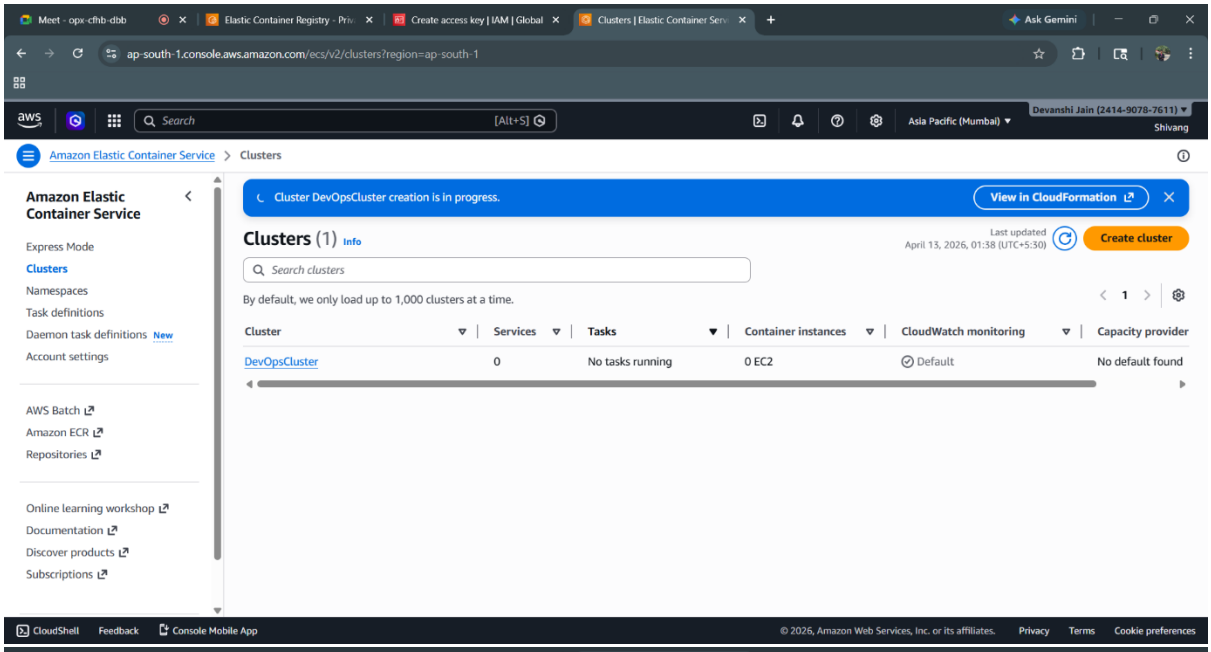
Meet - opx-cfhb-dbb
Elastic Container Registry - Priv
Create access key | IAM | Global
Clusters | Elastic Container Serv
Ask Gemini
ap-south-1.console.aws.amazon.com/ecs/v2/clusters?region=ap-south-1
Search
[Alt+S]
Asia Pacific (Mumbai)
Devanshi Jain (2414-9078-7611)
Shivang
Amazon Elastic Container Service > Clusters
Amazon Elastic Container Service
Express Mode
Clusters
Namespaces
Task definitions
Daemon task definitions New
Account settings
AWS Batch
Amazon ECR
Repositories
Online learning workshop
Documentation
Discover products
Subscriptions
Cluster DevOpsCluster creation is in progress.
View in CloudFormation
Clusters (1) Info
Last updated April 13, 2026, 01:38 (UTC+5:30)
Create cluster
Search clusters
By default, we only load up to 1,000 clusters at a time.
Cluster
Services
Tasks
Container instances
CloudWatch monitoring
Capacity provider
DevOpsCluster
0
No tasks running
0 EC2
Default
No default found
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

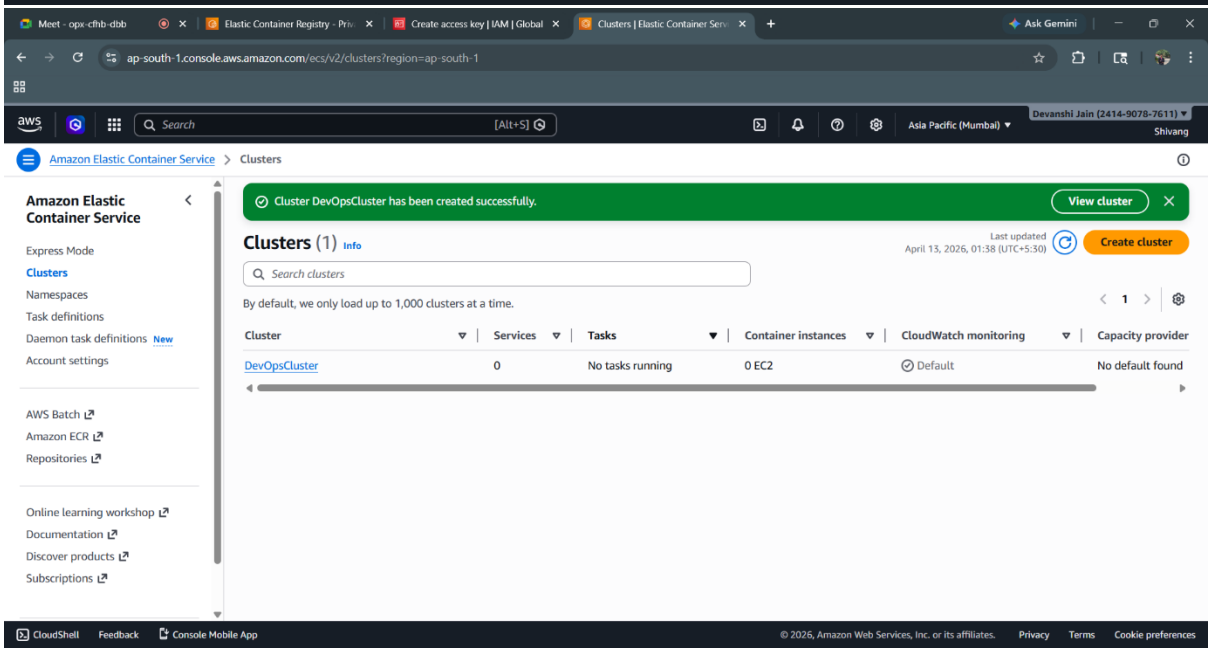
Meet - opx-cfhb-dbb
Elastic Container Registry - Priv
Create access key | IAM | Global
Clusters | Elastic Container Serv
Ask Gemini
ap-south-1.console.aws.amazon.com/ecs/v2/clusters?region=ap-south-1
Search
[Alt+S]
Asia Pacific (Mumbai)
Devanshi Jain (2414-9078-7611)
Shivang
Amazon Elastic Container Service > Clusters
Amazon Elastic Container Service
Express Mode
Clusters
Namespaces
Task definitions
Daemon task definitions New
Account settings
AWS Batch
Amazon ECR
Repositories
Online learning workshop
Documentation
Discover products
Subscriptions
Cluster DevOpsCluster has been created successfully.
View cluster
Clusters (1) Info
Last updated April 13, 2026, 01:38 (UTC+5:30)
Create cluster
Search clusters
By default, we only load up to 1,000 clusters at a time.
Cluster
Services
Tasks
Container instances
CloudWatch monitoring
Capacity provider
DevOpsCluster
0
No tasks running
0 EC2
Default
No default found
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

Shivang Mangal 500124202 Batch -2

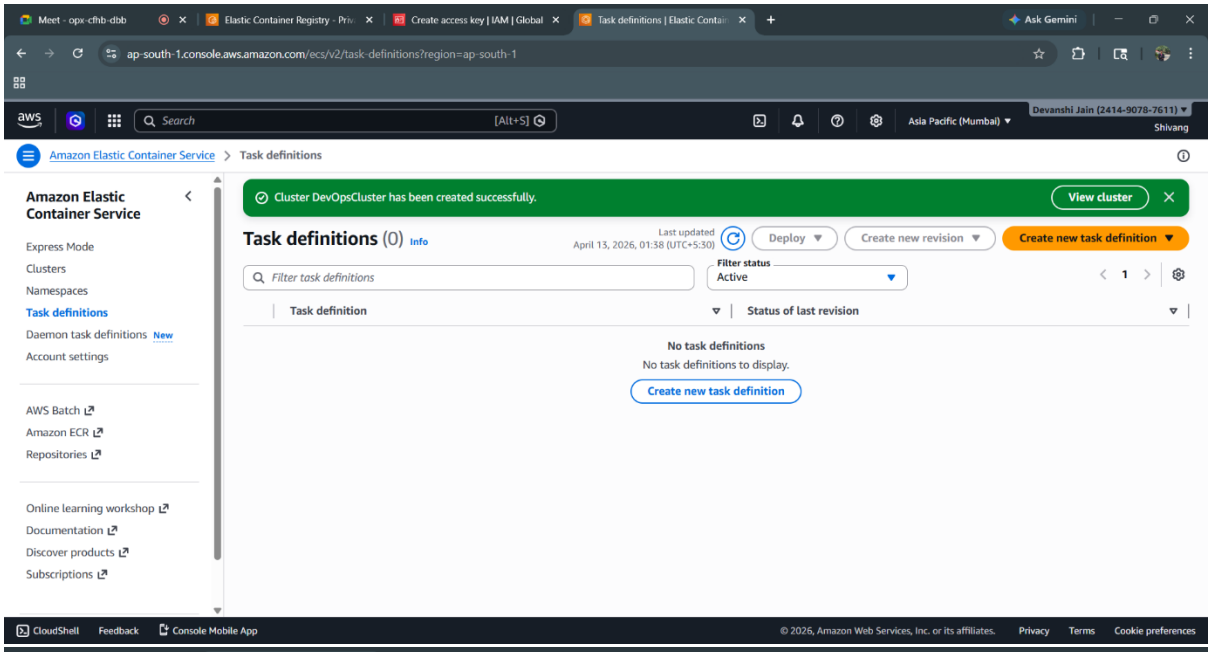

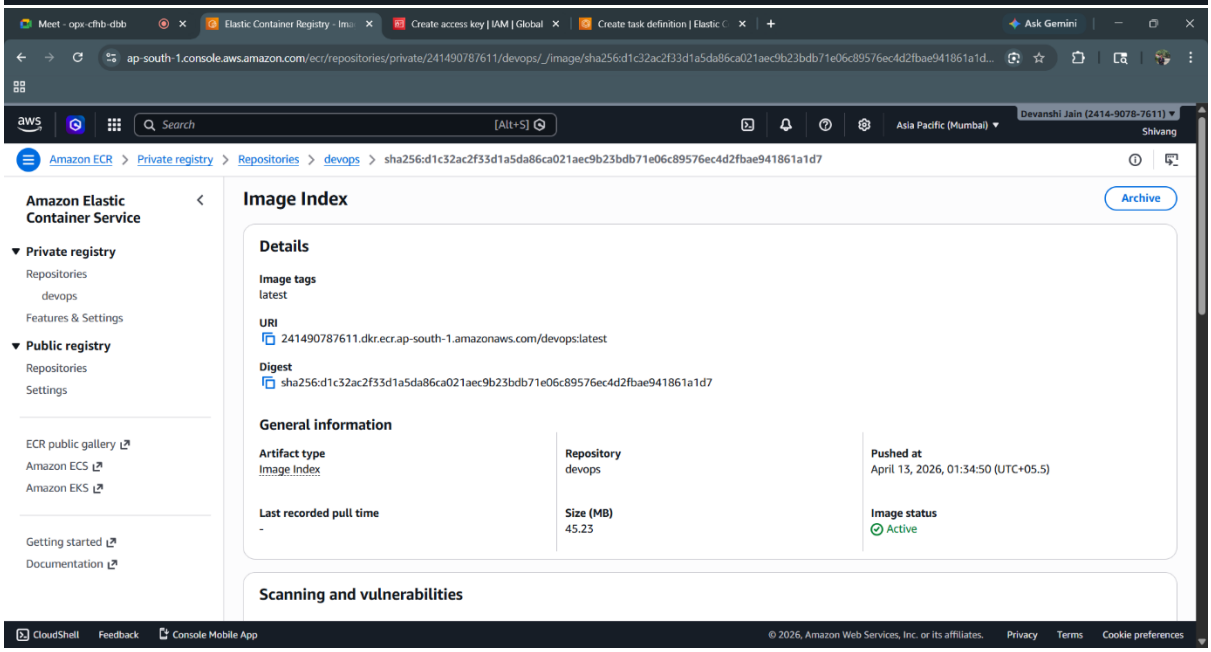

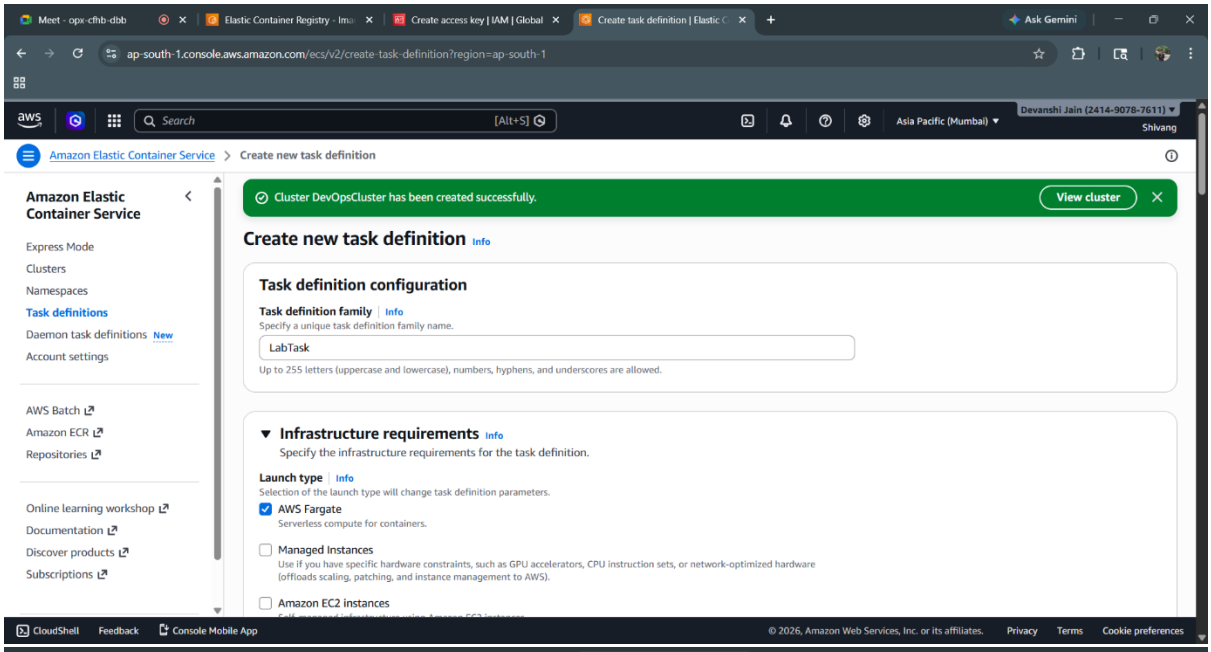
Meet - opx-cfhb-dbb
Elastic Container Registry - Ima
Create access key | IAM | Global
Create task definition | Elastic C
Ask Gemini
ap-south-1.console.aws.amazon.com/ecs/v2/create-task-definition?region=ap-south-1
Search
[Alt+S]
Asia Pacific (Mumbai)
Devanshi Jain (2414-9078-7611)
Shivang
Amazon Elastic Container Service
Create new task definition
Amazon Elastic Container Service
Express Mode
Clusters
Namespaces
Task definitions
Daemon task definitions New
Account settings
AWS Batch
Amazon ECR
Repositories
Online learning workshop
Documentation
Discover products
Subscriptions
Cluster DevOpsCluster has been created successfully.
View cluster
Create new task definition Info
Task definition configuration
Task definition family Info
Specify a unique task definition family name.
LabTask
Up to 255 letters (uppercase and lowercase), numbers, hyphens, and underscores are allowed.
Infrastructure requirements Info
Specify the infrastructure requirements for the task definition.
Launch type Info
Selection of the launch type will change task definition parameters.
AWS Fargate
Serverless compute for containers.
Managed Instances
Use if you have specific hardware constraints, such as GPU accelerators, CPU instruction sets, or network-optimized hardware (offloads scaling, patching, and instance management to AWS).
Amazon EC2 instances
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

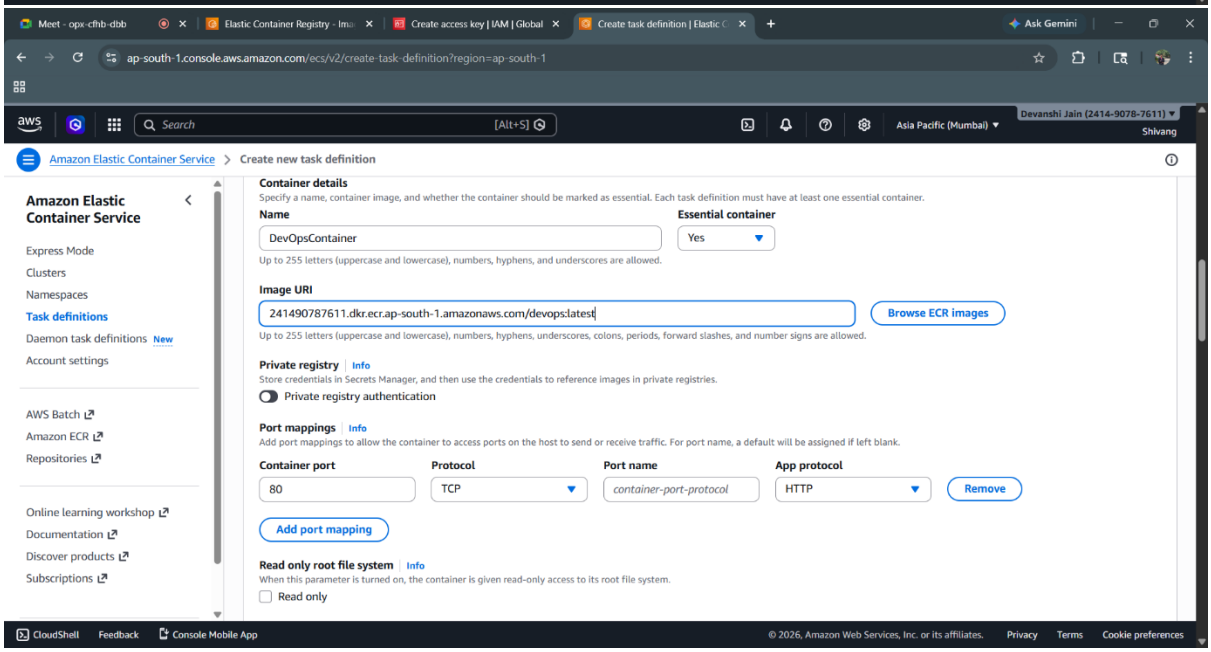
Meet - opx-cfhb-dbb
Elastic Container Registry - Ima
Create access key | IAM | Global
Create task definition | Elastic C
Ask Gemini
ap-south-1.console.aws.amazon.com/ecs/v2/create-task-definition?region=ap-south-1
Search
[Alt+S]
Asia Pacific (Mumbai)
Devanshi Jain (2414-9078-7611)
Shivang
Amazon Elastic Container Service
Create new task definition
Amazon Elastic Container Service
Express Mode
Clusters
Namespaces
Task definitions
Daemon task definitions New
Account settings
AWS Batch
Amazon ECR
Repositories
Online learning workshop
Documentation
Discover products
Subscriptions
Container details
Specify a name, container image, and whether the container should be marked as essential. Each task definition must have at least one essential container.
Name
DevOpsContainer
Up to 255 letters (uppercase and lowercase), numbers, hyphens, and underscores are allowed.
Essential container
Yes
Image URI
241490787611.dkr.ecr.ap-south-1.amazonaws.com/devops:latest
Browse ECR images
Up to 255 letters (uppercase and lowercase), numbers, hyphens, underscores, colons, periods, forward slashes, and number signs are allowed.
Private registry Info
Store credentials in Secrets Manager, and then use the credentials to reference images in private registries.
Private registry authentication
Port mappings Info
Add port mappings to allow the container to access ports on the host to send or receive traffic. For port name, a default will be assigned if left blank.
Container port
80
Protocol
TCP
Port name
container-port-protocol
App protocol
HTTP
Remove
Add port mapping
Read only root file system Info
When this parameter is turned on, the container is given read-only access to its root file system.
Read only
CloudShell
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

Shivang Mangal 500124202 Batch -2

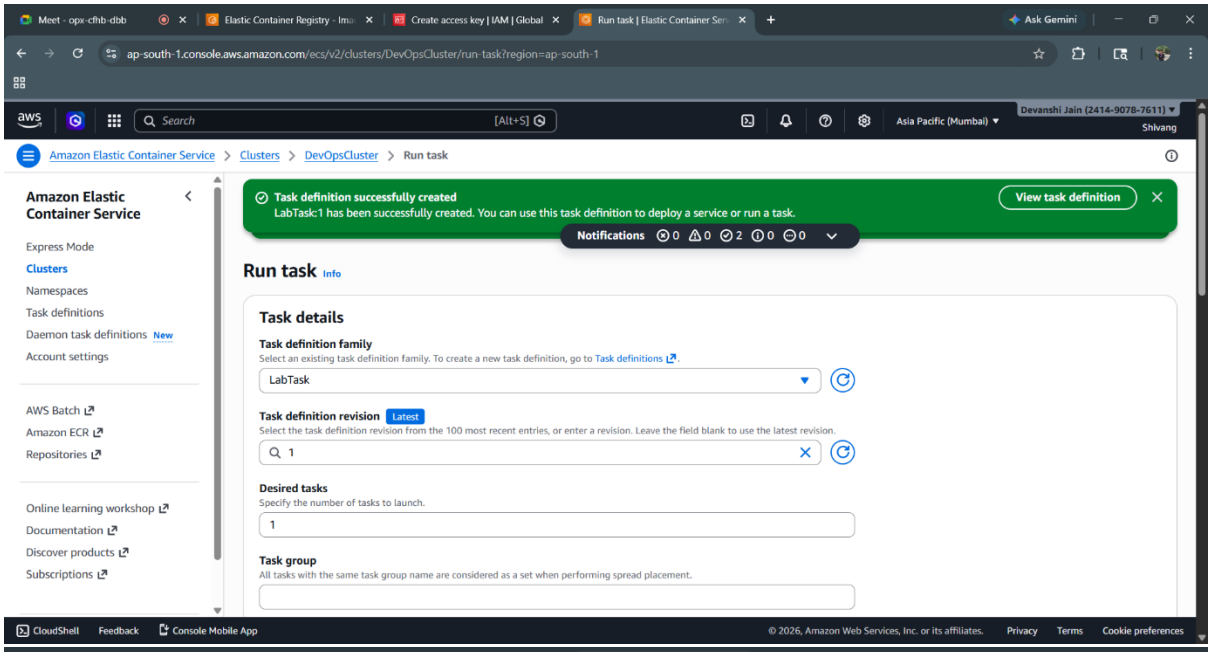

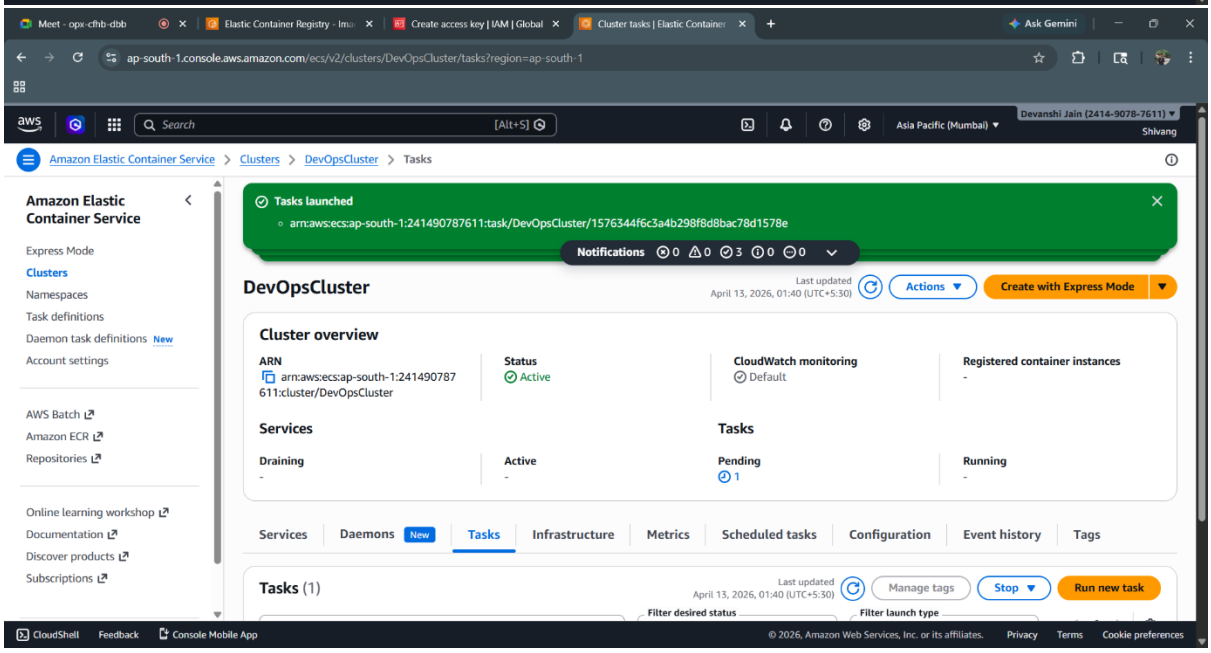

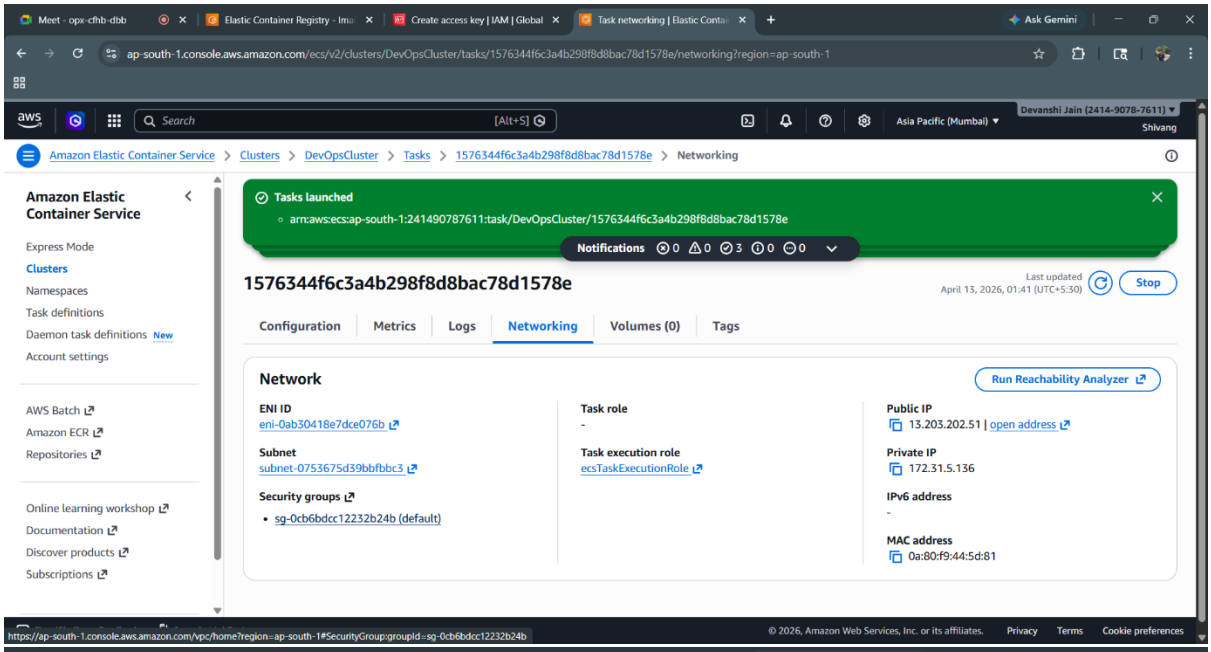
Amazon Elastic Container Service > Clusters > DevOpsCluster > Tasks > 1576344f6c3a4b298f8d8bac78d1578e > Networking
Tasks launched
arn:aws:ecs:ap-south-1:241490787611:task/DevOpsCluster/1576344f6c3a4b298f8d8bac78d1578e
1576344f6c3a4b298f8d8bac78d1578e
Stop
Configuration
Metrics
Logs
Networking
Volumes (0)
Tags
Network
Run Reachability Analyzer
ENI ID
eni-0ab30418e7dce076b
Subnet
subnet-0753675d39bbfbbc3
Security groups
sg-0cb6bdcc12232b24b (default)
Task role
-
Task execution role
ecsTaskExecutionRole
Public IP
13.203.202.51 | open address
Private IP
172.31.5.136
IPv6 address
-
MAC address
0a:80:f9:44:5d:81

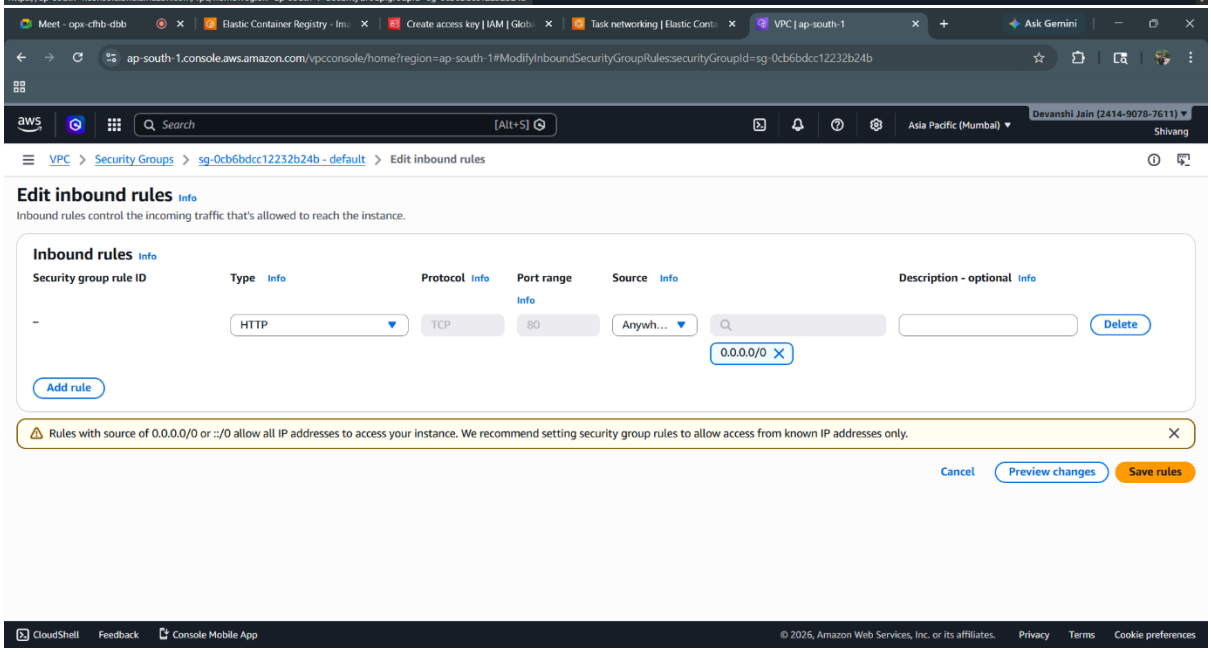
VPC > Security Groups > sg-0cb6bdcc12232b24b - default > Edit inbound rules
Edit inbound rules
Inbound rules control the incoming traffic that's allowed to reach the instance.
Inbound rules
Security group rule ID
Type
Protocol
Port range
Source
Description - optional
HTTP
TCP
80
Anywh...
0.0.0.0/0
Delete
Add rule
Rules with source of 0.0.0.0/0 or ::/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.
Cancel
Preview changes
Save rules
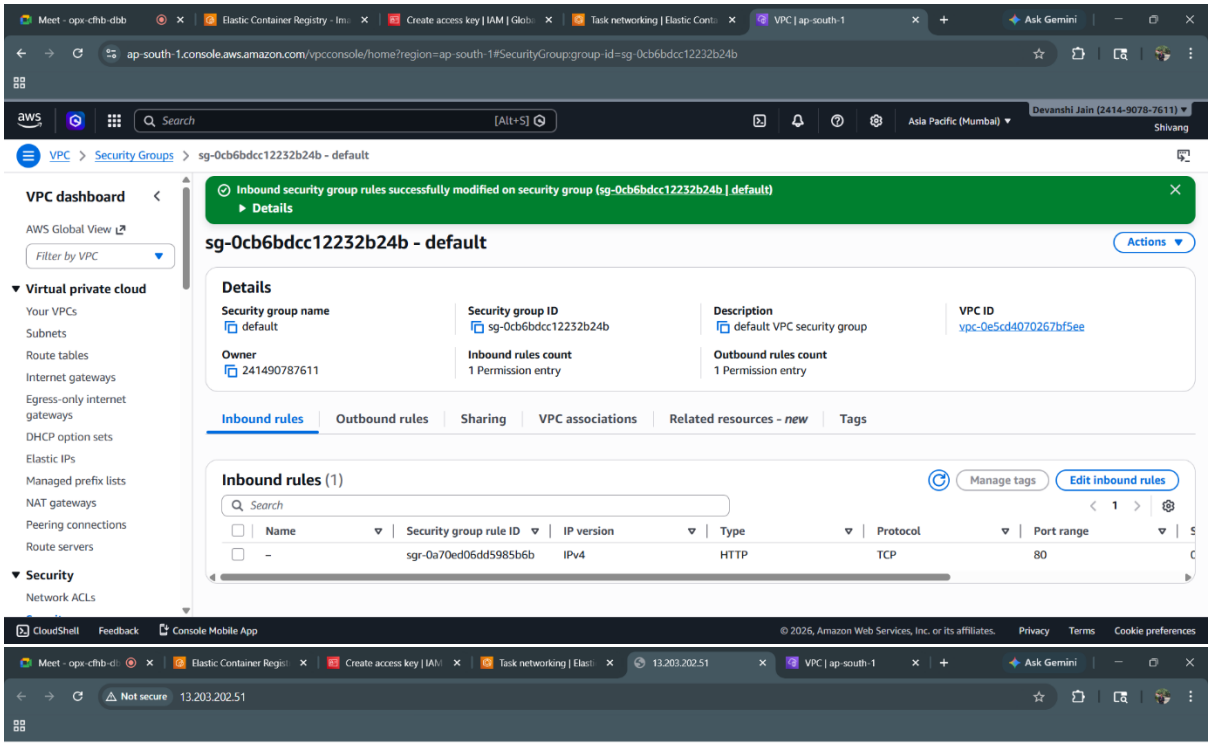
Shivang Mangal 500124202 Batch -2