Lab Exercise 6- Docker-Compose file

Name- Manish

SAP ID- 500119723

Batch-2

Objective:

Set up a WordPress environment using Docker Compose, including a MySQL database as the backend.

Prerequisites:

- Docker and Docker Compose installed on your system.

Step 1: Create a docker-compose.yml File

1. In the project directory, create a file named docker-compose.yml.
2. Add the following content to docker-compose.yml:

docker-compose.yml

```
version: '3.8'

services:
wordpress:
   image: wordpress:latest
ports:
-        "8002:80"     environment:
     WORDPRESS_DB_HOST: db:3306
     WORDPRESS_DB_USER: wp_user
     WORDPRESS_DB_PASSWORD: wp_pass
WORDPRESS_DB_NAME: wp_database     depends_on:
-        db
```

```
  db:
    image: mysql:latest
environment:
      MYSQL_ROOT_PASSWORD: root_password
      MYSQL_DATABASE: wp_database
      MYSQL_USER: wp_user
      MYSQL_PASSWORD: wp_pass
volumes:
      - db_data:/var/lib/mysql

volumes:
db_data:
```

Step 2: Start the Containers

1. Run the following command to start the containers:

```
docker-compose up -d
```

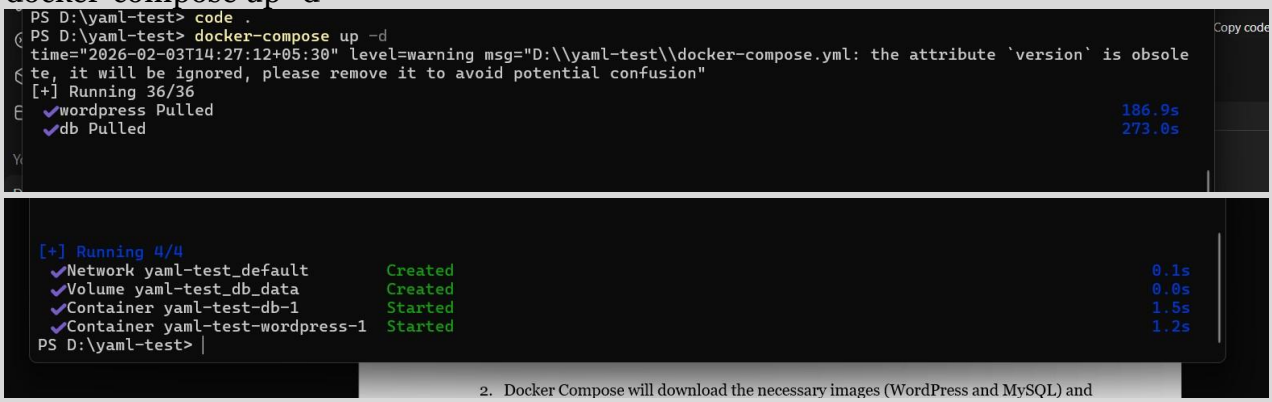

2. Docker Compose will download the necessary images (WordPress and MySQL) and start both services.

Step 4: Access WordPress

1. Open your web browser and go to **http://localhost:8002**
2. Follow the WordPress installation steps to set up your site.

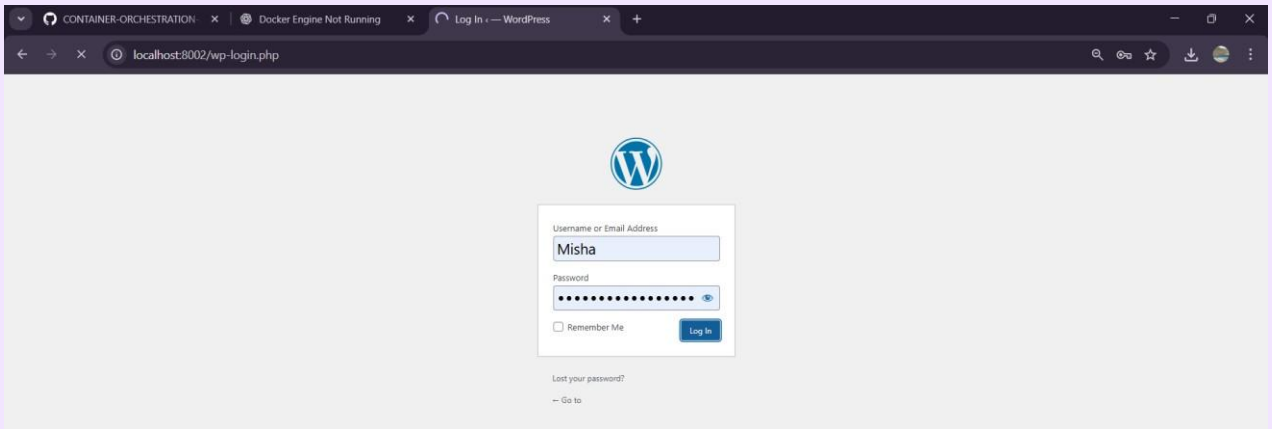

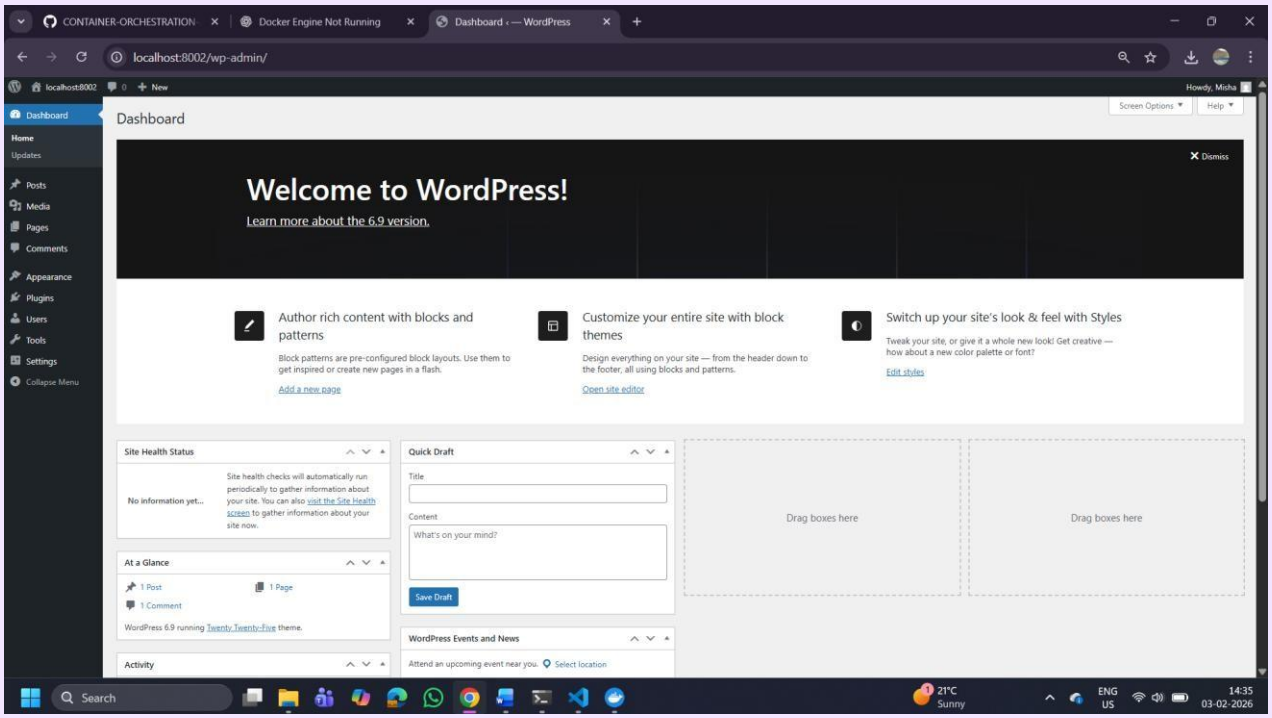

Step 5: Stop and Remove Containers

To stop the containers and remove the associated resources, run:

```
docker-compose down
```

```
 ✔Container yaml-test-wordpress-1  Started                                    1.2s
PS D:\yaml-test> docker-compose down
time="2026-02-03T14:36:23+05:30" level=warning msg="D:\\yaml-test\\docker-compose.yml: the attribute `version` is obsole
te, it will be ignored, please remove it to avoid potential confusion"
[+] Running 3/3
 ✔Container yaml-test-wordpress-1  Removed                                    1.5s
 ✔Container yaml-test-db-1         Removed                                    0.8s
 ✔Network yaml-test_default        Removed                                    0.4s
PS D:\yaml-test>
```

This setup allows you to quickly start a WordPress site locally and experiment with

---

Explanation of docker-compose.yml:

- **wordpress**: Sets up the WordPress container, mapping port 80 inside the container to port 8002 on your local machine.
- **db**: Sets up the MySQL container with a volume (db_data) for persistent storage.

Additional Notes:

- Modify the environment variables as needed for different configurations.
- To view logs, use docker-compose logs -f.

This setup allows you to quickly start a WordPress site locally and experiment with configurations.