RDS > Performance Insights

serverless-database-mysqld-1-instance-1

| serverless-database-mysqld-1-instance-1 ▾ | | Last 5 hours | ↻ | ◯ Auto refresh | ⚙ |
| Aurora MySQL   8.0.mysql_aurora.3.05.1   db.serverless | | | | | |

ℹ **Performance Insights supports additional retention tiers**   [Modify retention tier]   ✕
To change your current retention tier, modify the database. Learn more ↗

Database load   sliced by   [Waits ▾]   [Bar] [**Line**] [Table]   **Info**   ☑ Show estimated vCPU

Average active sessions (AAS)
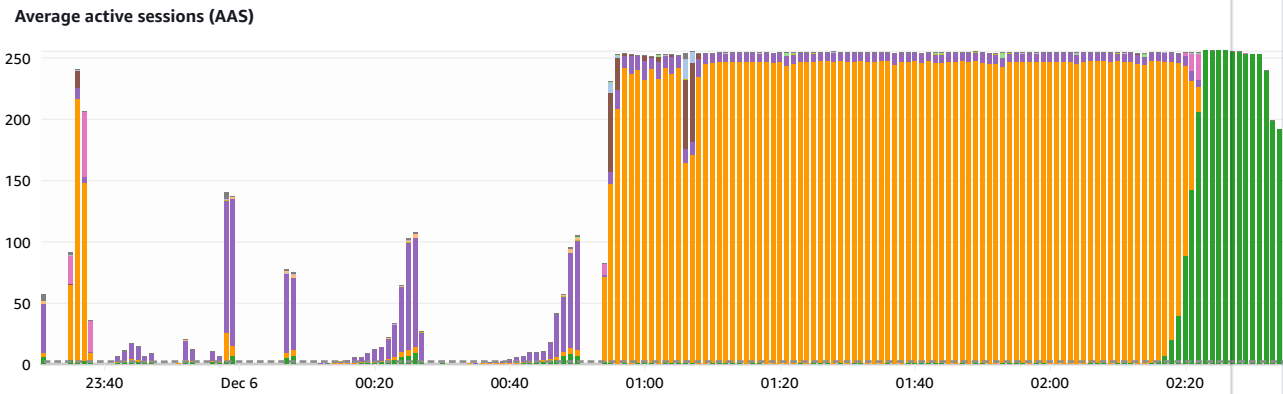
Dimensions | Metrics

Top waits | **Top SQL** | Top hosts | Top users | Top databases

Top SQL (25)   Learn more ↗

🔍 Find SQL statements   ‹ **1** 2 3 › ⚙

Load by waits (AAS)			SQL statements
◯	⊞	4.84	COMMIT
◯	⊞	0.26	INSERT INTO `sbtest60` (`k`, `c`, `pad`) VALUES (…) /*, … */
◯	⊞	0.24	INSERT INTO `sbtest237` (`k`, `c`, `pad`) VALUES (…) /*, … */
◯	⊞	0.24	INSERT INTO `sbtest234` (`k`, `c`, `pad`) VALUES (…) /*, … */
◯	⊞	0.23	INSERT INTO `sbtest20` (`k`, `c`, `pad`) VALUES (…) /*, … */
◯	⊞	0.23	INSERT INTO `sbtest164` (`k`, `c`, `pad`) VALUES (…) /*, … */
◯	⊞	0.23	INSERT INTO `sbtest72` (`k`, `c`, `pad`) VALUES (…) /*, … */
◯	⊞	0.23	INSERT INTO `sbtest103` (`k`, `c`, `pad`) VALUES (…) /*, … */
◯	⊞	0.22	INSERT INTO `sbtest133` (`k`, `c`, `pad`) VALUES (…) /*, … */
◯	⊞	0.22	INSERT INTO `sbtest205` (`k`, `c`, `pad`) VALUES (…) /*, … */

Select a SQL statement

To view the SQL text, select it from the Top SQL table above.

SQL ID: - (Support SQL ID)Digest ID: - (Support Digest ID)

Copy Download