



- Ubuntu network configuration showing 192.168.10.100.

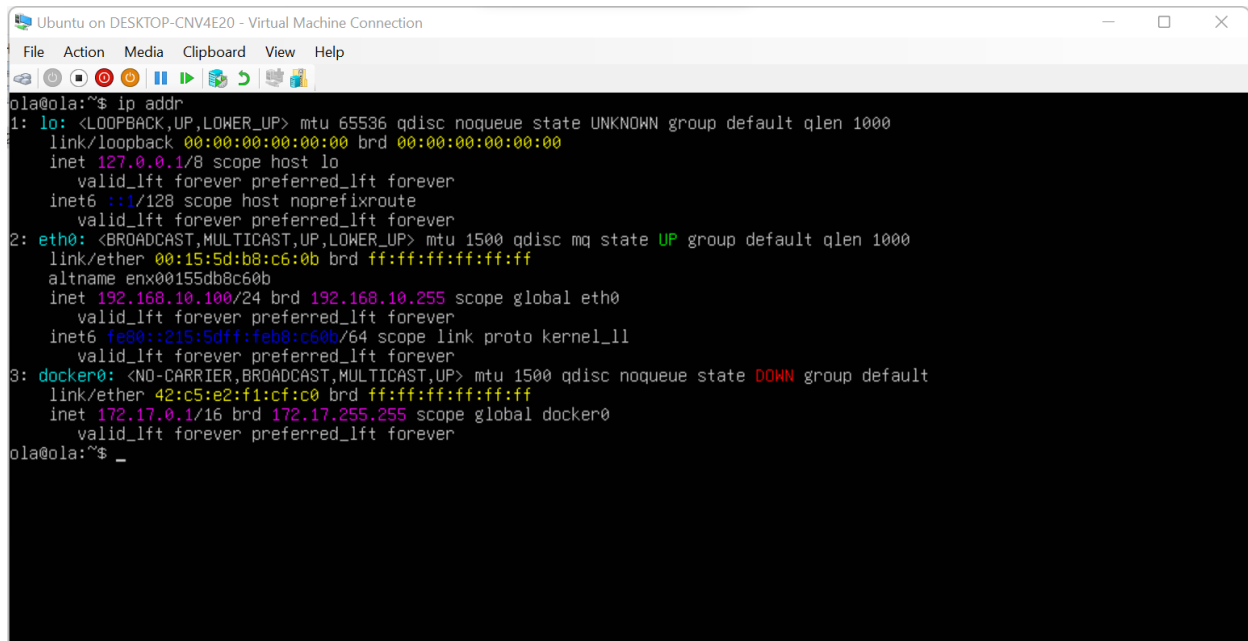


```
ola@ola:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc mq state UP group default qlen 1000
    link/ether 00:15:5d:b8:c6:0b brd ff:ff:ff:ff:ff:ff
    altname enx00155db8c60b
    inet 192.168.10.100/24 brd 192.168.10.255 scope global eth0
        valid_lft forever preferred_lft forever
    inet6 fe80::215:5dff:feb8:c60b/64 scope link proto kernel_ll
        valid_lft forever preferred_lft forever
3: docker0: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1500 qdisc noqueue state DOWN group default
    link/ether 42:c5:e2:f1:cf:c0 brd ff:ff:ff:ff:ff:ff
    inet 172.17.0.1/16 brd 172.17.255.255 scope global docker0
        valid_lft forever preferred_lft forever
ola@ola:~$
```

- Kali Linux network configuration showing 192.168.10.101.

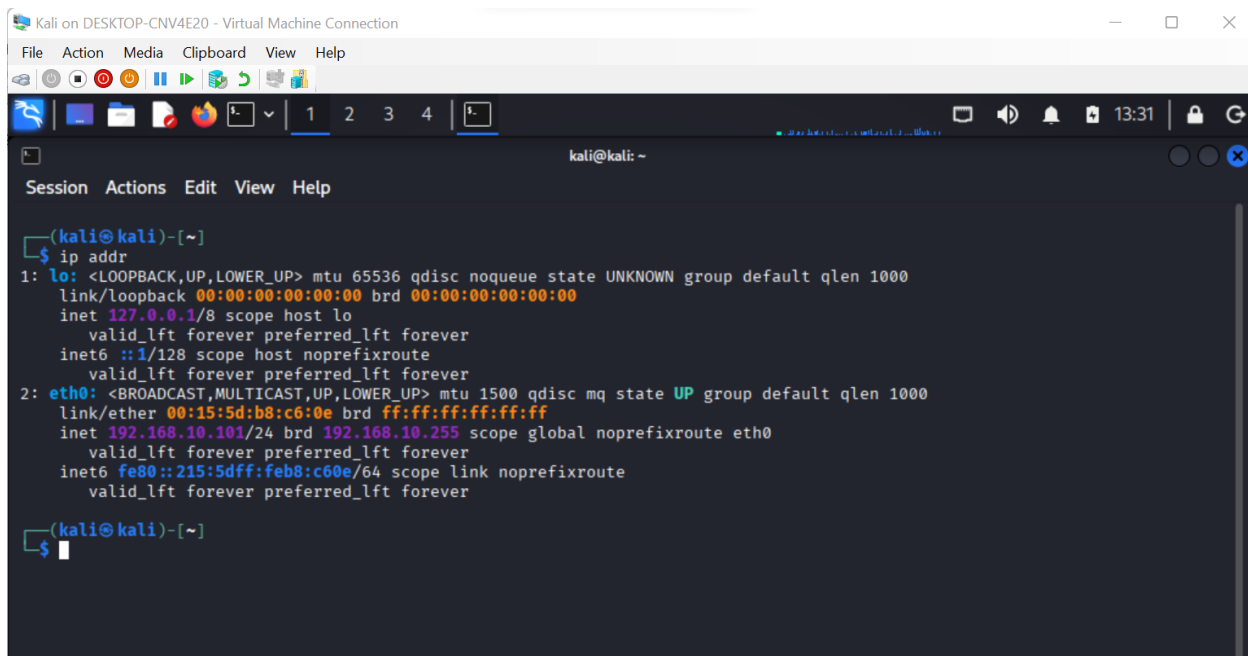


```
(kali@kali)-[~]
$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc mq state UP group default qlen 1000
    link/ether 00:15:5d:b8:c6:0e brd ff:ff:ff:ff:ff:ff
    inet 192.168.10.101/24 brd 192.168.10.255 scope global noprefixroute eth0
        valid_lft forever preferred_lft forever
    inet6 fe80::215:5dff:feb8:c60e/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
(kali@kali)-[~]
$
```

- Connectivity verification between the two systems.

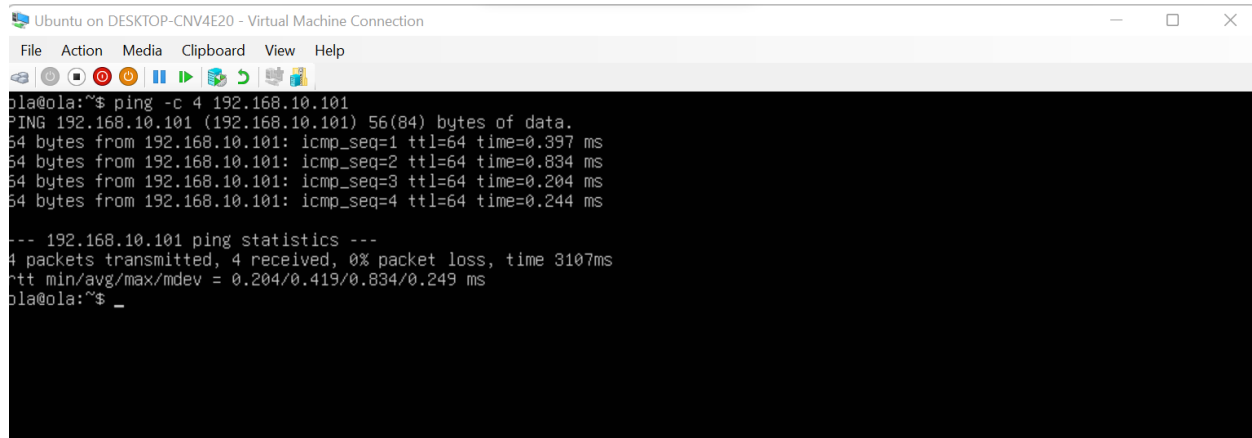

```
ola@ola:~$ ping -c 4 192.168.10.101
PING 192.168.10.101 (192.168.10.101) 56(84) bytes of data:
64 bytes from 192.168.10.101: icmp_seq=1 ttl=64 time=0.397 ms
64 bytes from 192.168.10.101: icmp_seq=2 ttl=64 time=0.834 ms
64 bytes from 192.168.10.101: icmp_seq=3 ttl=64 time=0.204 ms
64 bytes from 192.168.10.101: icmp_seq=4 ttl=64 time=0.244 ms

--- 192.168.10.101 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3107ms
rtt min/avg/max/mdev = 0.204/0.419/0.834/0.249 ms
ola@ola:~$ _
```

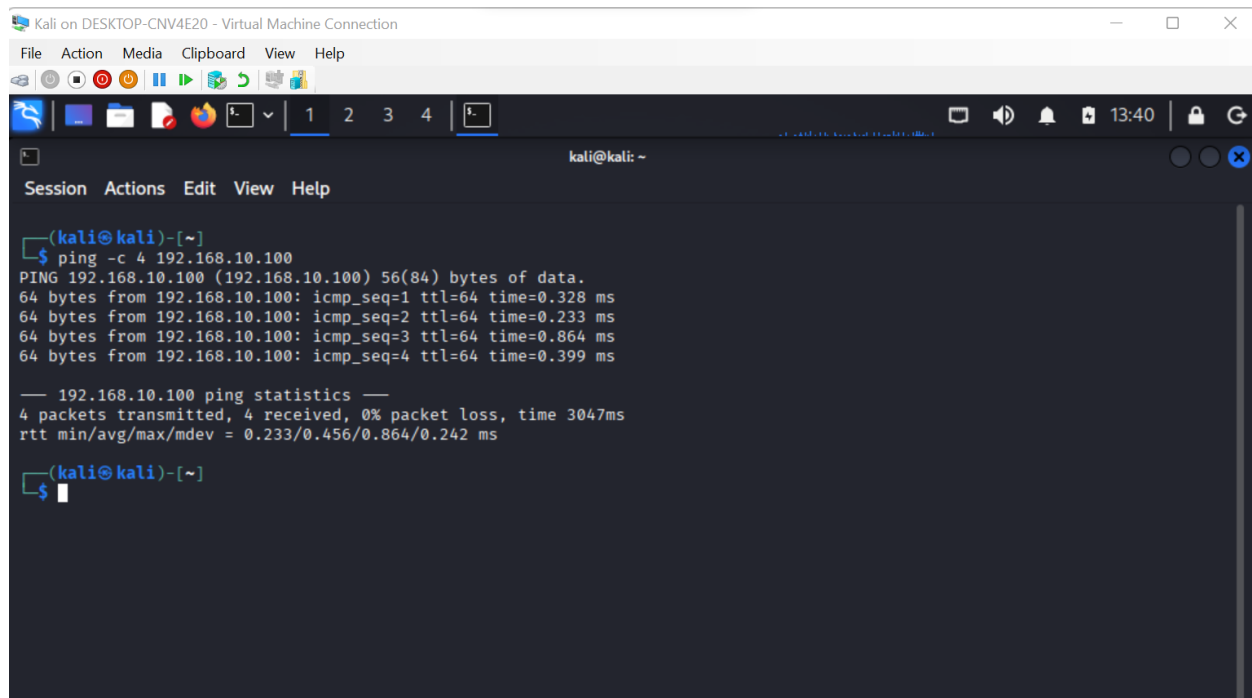

```
(kali@kali)-[~]
$ ping -c 4 192.168.10.100
PING 192.168.10.100 (192.168.10.100) 56(84) bytes of data:
64 bytes from 192.168.10.100: icmp_seq=1 ttl=64 time=0.328 ms
64 bytes from 192.168.10.100: icmp_seq=2 ttl=64 time=0.233 ms
64 bytes from 192.168.10.100: icmp_seq=3 ttl=64 time=0.864 ms
64 bytes from 192.168.10.100: icmp_seq=4 ttl=64 time=0.399 ms

--- 192.168.10.100 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3047ms
rtt min/avg/max/mdev = 0.233/0.456/0.864/0.242 ms

(kali@kali)-[~]
$
```