
$$E = H[P_{opt}, :],\ D = H[P_{decide}, :], \quad k = EW_k^\mathsf{T} + b_k,\ q = DW_q^\mathsf{T} + b_q, \quad s = kq^\mathsf{T}/\sqrt{d_p}$$

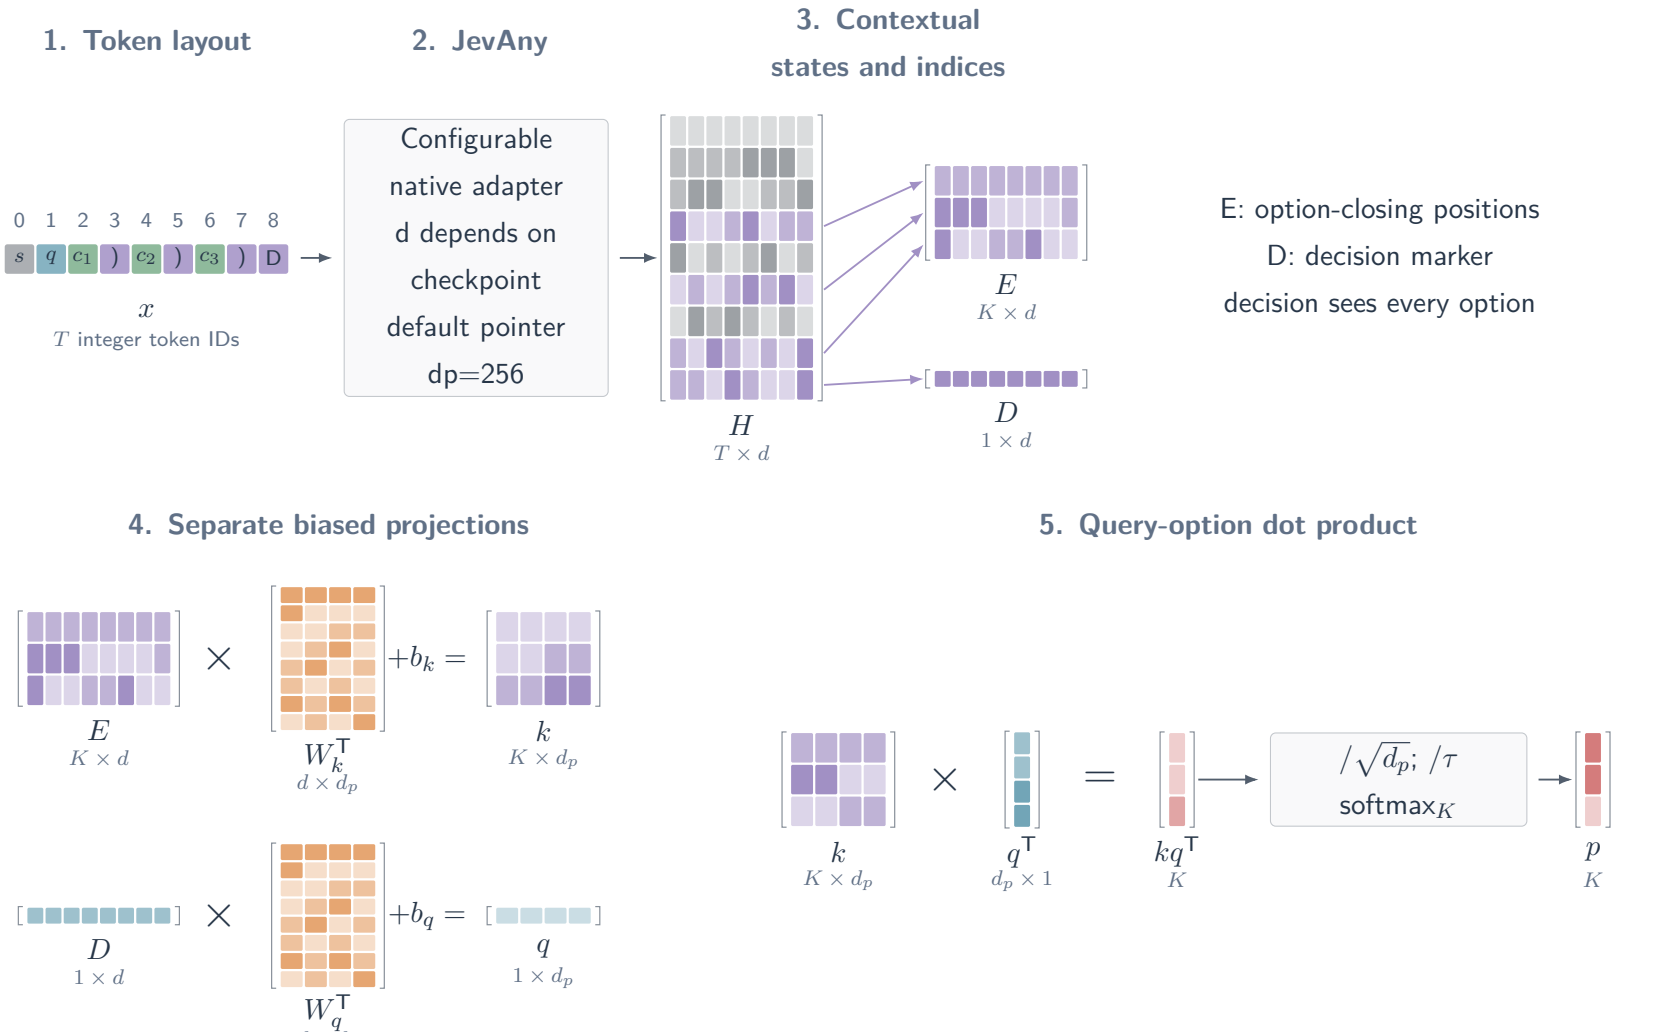

Axes	d configurable, $d_p = 256$; Single-question illustration; batch omitted. Tile counts encode axes, not literal sizes.
Objects	Gray: input/context; violet: hidden states; orange: parameter matrices; red: logits/probabilities. Positions, code IDs and owner maps are integers, not scores. Tiles show roles, not measured magnitudes.
Mechanism	Native source mode, not a pinned HF checkpoint. Rows/packed dispatch depends on the backbone; hybrid Qwen3.5 falls back to question rows. Native pointer: hard/soft candidate CE. The figure selects residual_dim=0 (default); the optional residual MLP is not silently assumed present.