

$$X \xrightarrow{\text{Qwen3 decoder}} H \xrightarrow{P\text{ gather}} h \xrightarrow{1024\to256\to1} S \xrightarrow{\tau\text{, normalize}} p$$


1. A question becomes a causal candidate-list sequence

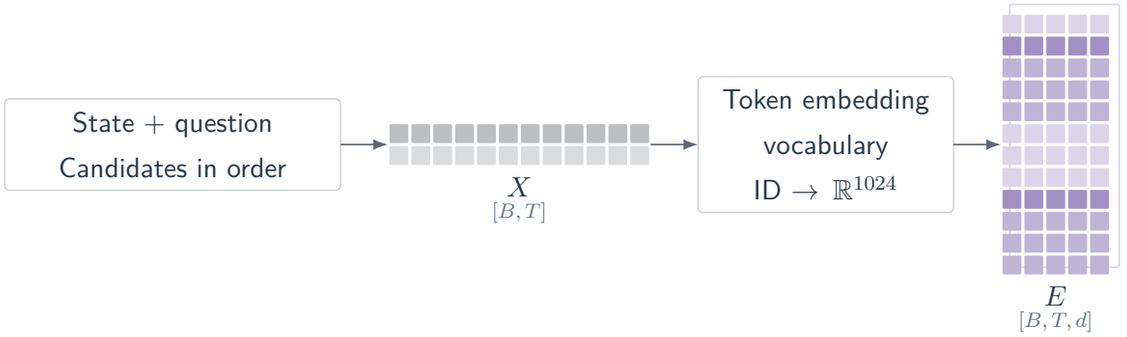


2. Qwen3-0.6B-Base backbone; LoRA r=16 on adapted linear layers

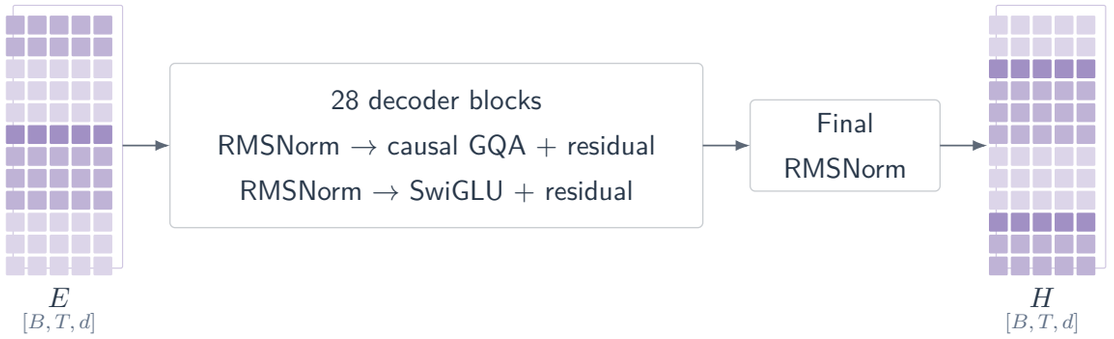

3. Select candidate-end representations; bypass the vocabulary head

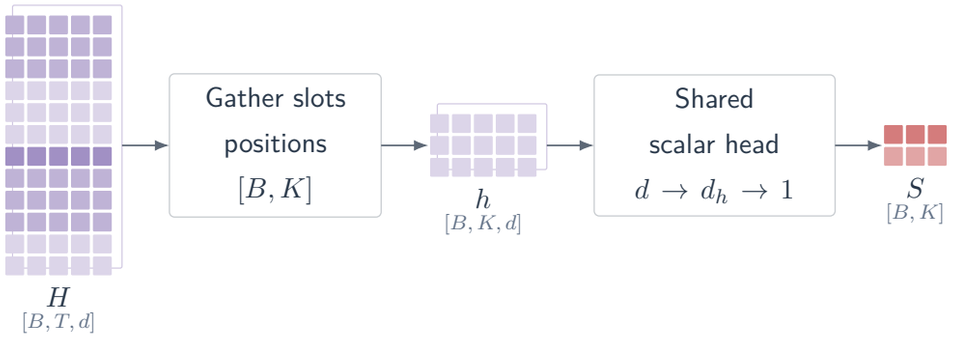

4. Calibrate scores; normalize according to the question type

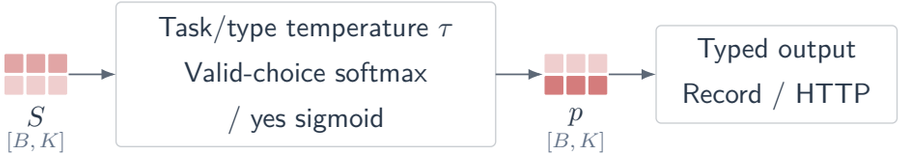

Axes B: questions (queue and urgency are separate rows); T: padded tokens; $d = 1024$: hidden channels; K: padded candidate slots. The queue uses 6 slots; urgency uses 1.

Meaning One inspectable JevLike implementation: the recorded Banking77 support recipe uses a shared $1024 \to 256 \to 1$ scalar MLP. Later candidates can see earlier ones in list layout. This is not a reconstruction of Jev internals or the Tev1 answer-token architecture.

Cell counts illustrate axes, not model sizes; tint identifies roles, not numeric values.