$$\text{Record} \longrightarrow (X, A, P) \longrightarrow H \longrightarrow S \longrightarrow p \longrightarrow \text{typed output}$$

MetisCraft: from a question to a typed probability

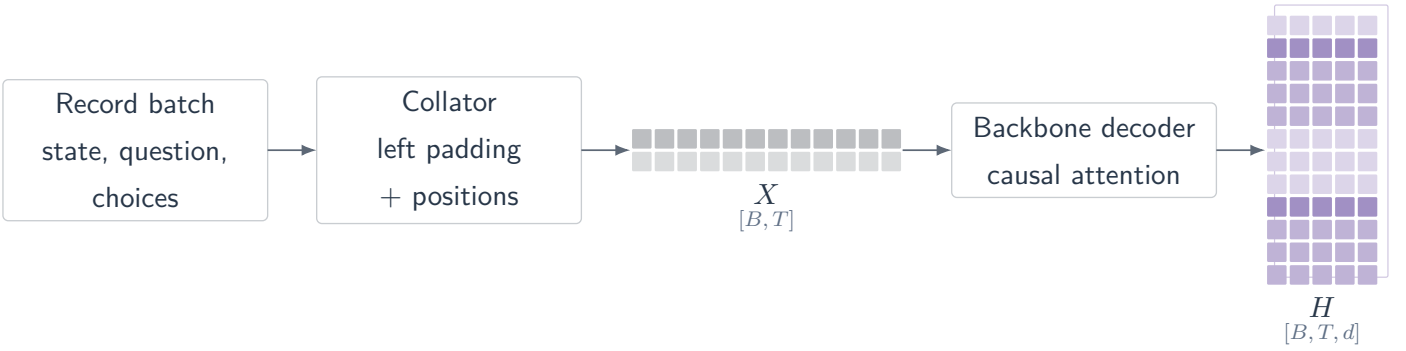

Answer-token branch: noul, choice and score

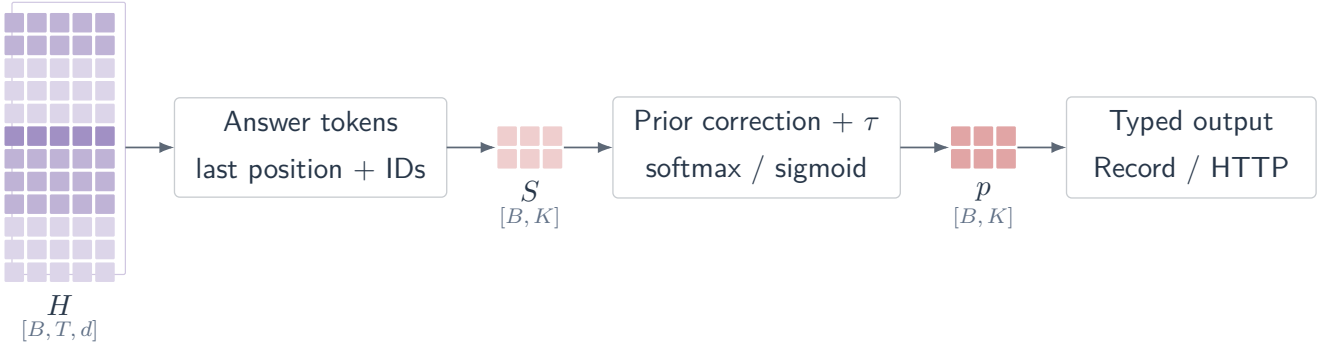

Candidate-scalar branch: all four Record judgment types

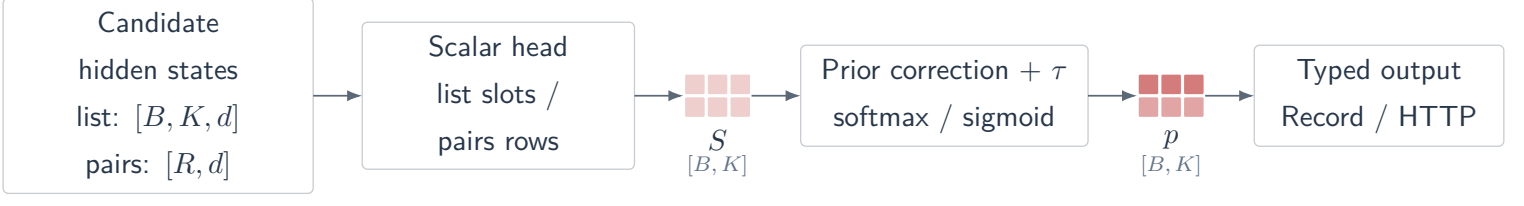

Axes B: questions; T: tokens; d: hidden channels; K: padded candidate columns. A masks padding; M^{cand} marks valid candidates.

Meaning Both implemented readouts produce real scores S. Temperature routing is shared by offline and HTTP paths; HTTP supports noul, choice and score, while Record prediction also supports multi_label.

Cell counts illustrate axes, not model sizes; tint identifies roles, not numeric values.