
$$U = H[P, :], \quad A = \mathrm{ReLU}(UW_1^\mathsf{T} + b_1), \quad s = \mathrm{squeeze}(AW_2^\mathsf{T} + b_2)$$

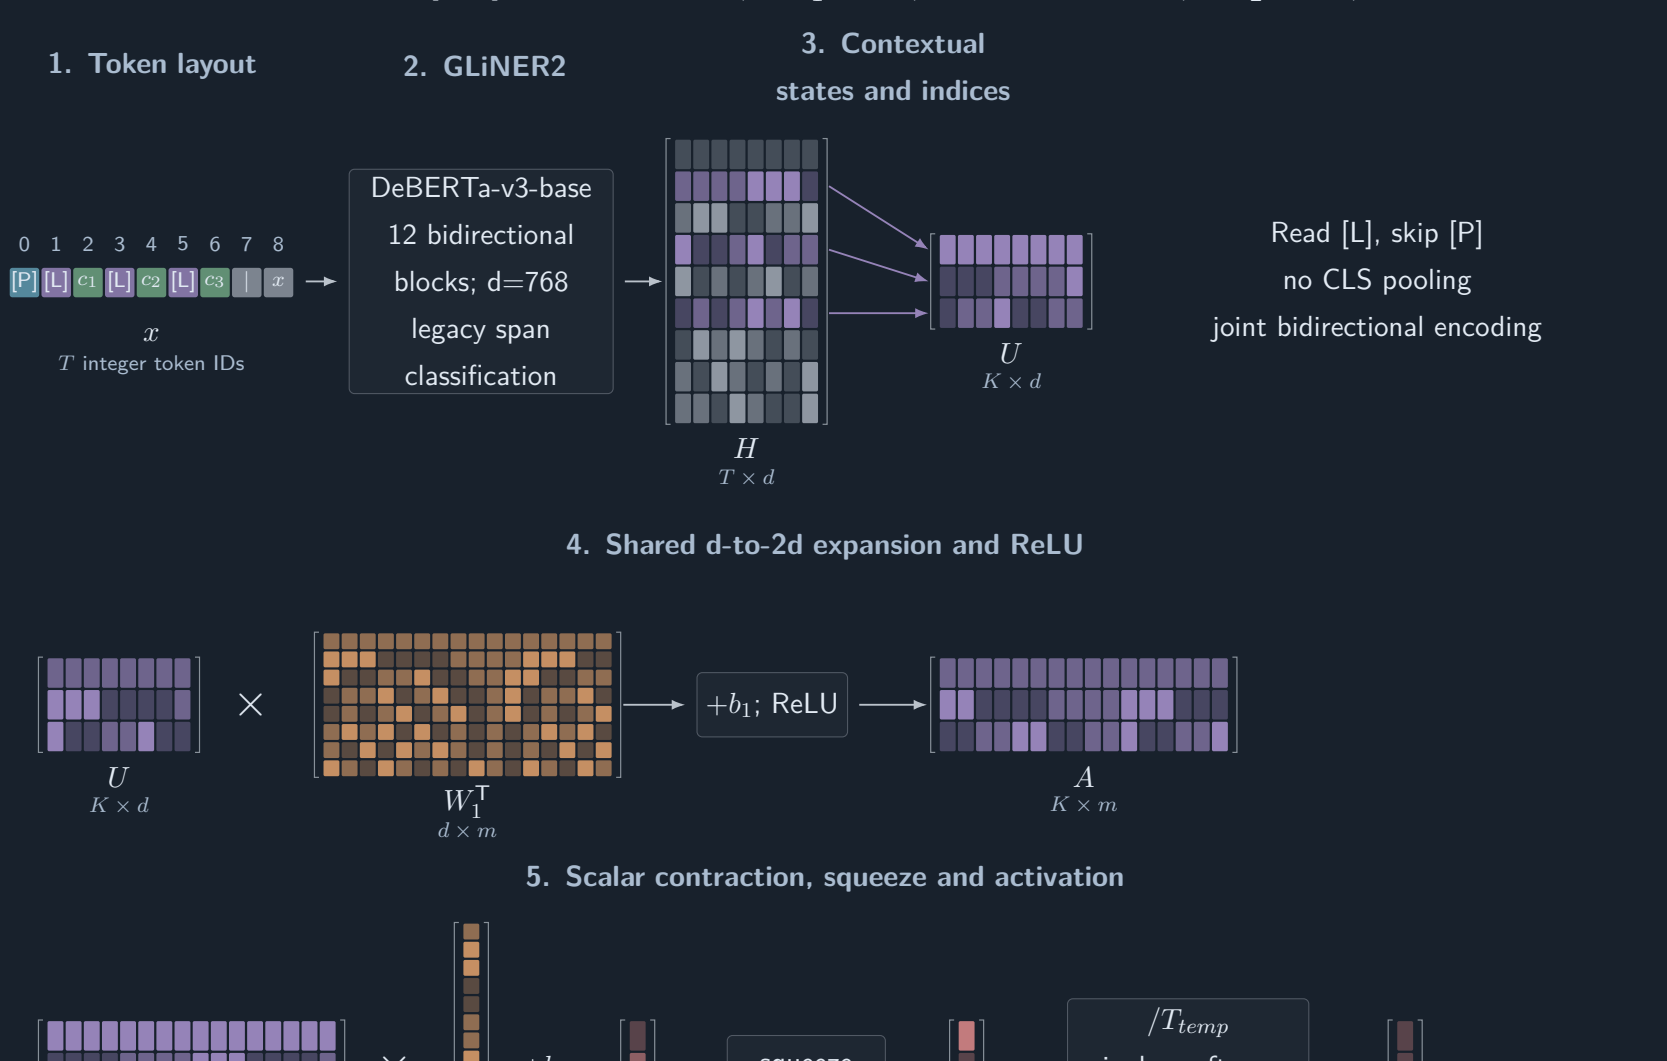

Axes	$d = 768,\ m = 1536$; Single-question illustration; batch omitted. Tile counts encode axes, not literal sizes.
Objects	Gray: input/context; violet: hidden states; orange: parameter matrices; red: logits/probabilities. Positions, code IDs and owner maps are integers, not scores. Tiles show roles, not measured magnitudes.
Mechanism	Gather actual [L] markers, skipping [P]; shared d-to-2d ReLU-to-1 MLP. The processor does not insert a CLS readout for this path. Classification uses sum-reduced BCE even when single-label inference selects softmax. The span/count heads are not on this classification path.