$$q = W_q h^{dec}, \quad k_j = W_k h_j^{opt}, \quad S_{b,j} = \frac{q_b^\top k_{b,j}}{\sqrt{d_p}}, \quad p = \mathrm{softmax}_j(S/\tau)$$

Gather one decision representation for each question in packed inputs

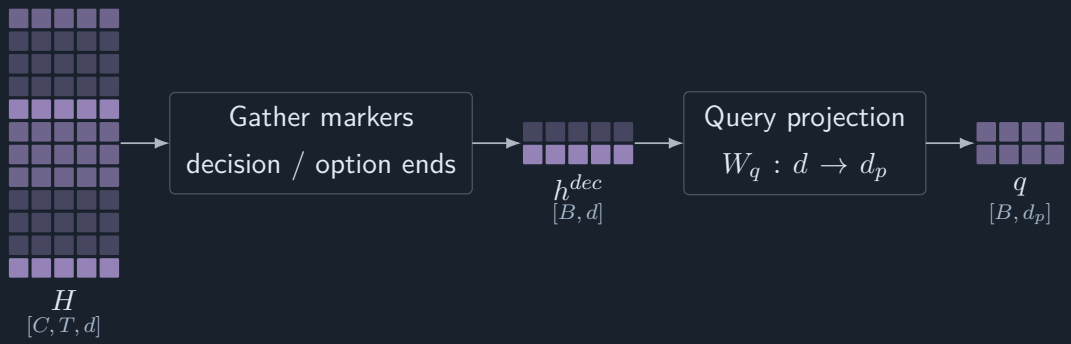

Project candidate representations and score them against the decision query

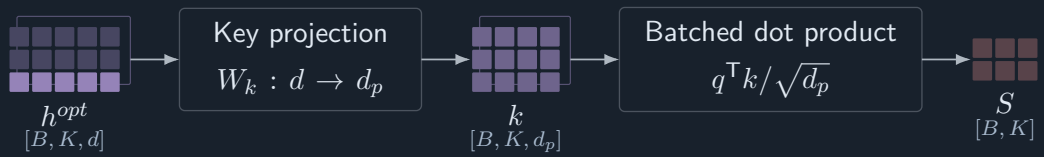

Axes C: input sequences; Q: questions per sequence; $B = CQ$ in the fixed-size example. $h^{dec} : [B, d]$; $h^{opt} : [B, K, d]$; d_p: pointer width.

Meaning This is a comparison architecture, not a MetisCraft readout. Branch visibility, option isolation and position IDs belong to its packing contract. Multiple questions per sequence do not imply a universal latency improvement; hybrid backbones may need separate rows.

Cell counts illustrate axes, not model sizes; tint identifies roles, not numeric values.