

Sentinel

A Fully Procedural Game Engine
and Open-World Military Shooter

*Nothing is loaded from a model, image or sound file:
everything is generated from code and a seed.*

Md. Shifat Hasan

Roll 2107067 · 4th Year 1st Term


Instructors: Md Tajmilur Rahman, Md. Mubtashim Abrar Nihal
Computer Graphics and Image Processing Laboratory · October 7, 2026

Outline

1. Problem, objectives, architecture
2. Procedural shapes and textures
3. Transformations: creating and combining objects
4. Illumination models and light sources
5. Rendering pipeline: shadows, ambient, tone map
6. Results, verification, a bug fixed
7. Video tour of the project



Six illumination models



1. Problem, objectives and architecture

Can a complete, playable 3D game be made by code alone on a student laptop?

Two hard limits

No model, image or precomputed data file; macOS OpenGL 4.1 has no compute shaders.

Objectives

Layered engine; all content from code and seeds; modern renderer and a playable game; verified by tests and a 16.7 ms budget.

The game

Drivable jeep, truck, carrier, tank, helicopter; ladders, doors, stealth enemies; five-objective mission; synthesised sound.

Game: mission, AI, vehicles

Render: deferred, lights, sky

World: collision, terrain

Procedural: noise, textures


GPU: shaders, buffers

Platform: window, input



A lower layer never knows a higher one.

2. Procedural shapes and textures

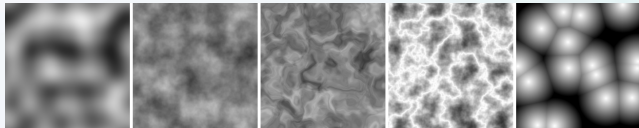

gradient, fractal, warped, ridged and cellular noise

Fractal noise (tiles exactly)


$$F(\mathbf{x}) = \frac{\sum_{i=0}^{n-1} 2^{-i} \nu(2^i \mathbf{x})}{\sum_{i=0}^{n-1} 2^{-i}}$$

Vertex push

$$\mathbf{p}' = \mathbf{p} + A \nu(f\mathbf{p}) \hat{n}, \quad |\mathbf{p}' - \mathbf{p}| \leq A$$

- 18 recipes $\rightarrow$ 22 materials, baked once at 1024^2
- **Scharr** filter turns height into bumps; crevices darken
- Objects: tables of primitives and noise deformers
- Soldiers: skeletons with two-bone IK legs

3. Transformations: creating and combining objects



One part: scale, turn, then move


$$M_{\text{part}} = T(\mathbf{t}) R_z R_y R_x S(\mathbf{s})$$

Right to left: stretched, turned about its own centre, moved last. $(1, 0, 0) \rightarrow S(2, 1, 1) \rightarrow R_y 90^\circ \rightarrow T(5, 0, 0) = (5, 0, -2)$

Normals: inverse transpose

$$\hat{n}' = \frac{(L^{-1})^\top \hat{n}}{\|(L^{-1})^\top \hat{n}\|} \text{ keeps normals perpendicular}$$

after a stretch; $S = \text{diag}(2, 1, 1)$: correct $(0.447, 0.894, 0)$, naive $(0.894, 0.447, 0)$; $\det < 0$ flips winding.



Hierarchy and screen

$$M_{\text{gun}} = M_{\text{hull}} T(\mathbf{c}_t) R_y(\theta_t) T(\mathbf{c}_g) R_x(-\theta_g)$$

$$\mathbf{p}_{\text{clip}} = P V M_{\text{world}} M_{\text{part}} \mathbf{p}$$

4. Illumination models and light sources

$$L_o = \sum_j f(\mathbf{l}_j, \mathbf{v}) L_j \text{ att}_j \text{ sh}_j \max(0, \mathbf{n} \cdot \mathbf{l}_j) + \text{ambient} \cdot \text{AO} + \mathbf{e}$$

Lambert

$$f = \frac{c_d}{\pi}$$

Phong

$$\frac{c_d(1-F_0)}{\pi} + F_0 \frac{m+2}{2\pi} (\mathbf{r} \cdot \mathbf{v})^m$$

**Blinn-
Phong**

$$\frac{c_d(1-F_0)}{\pi} + F_0 \frac{m+8}{8\pi} (\mathbf{n} \cdot \mathbf{h})^m$$

Oren-Nayar

$$\frac{c_d}{\pi} (A + B \max(0, \cos \Delta\varphi) \sin \alpha \tan \beta)$$

**Cook-
Torrance**

$$\frac{(1-F_l)(1-F_v)c_d}{\pi} + DVF$$

Subsurface

$$\text{cosine} \rightarrow \frac{\mathbf{n} \cdot \mathbf{l} + w}{1+w}, w = 0.5$$



Lambert · Phong · Blinn-Phong · Oren-Nayar
· Cook-Torrance · Subsurface

Light sources

Directional (sun, moon); point (lamps) with $\text{att} = \frac{\text{clamp}(1-(d/R)^4)^2}{d^2+1}$; spot (cone factor); area (4×4 samples).

5. The rendering pipeline: shadows, ambient, tone map




Deferred shading: store colour, normal, shininess, depth first; light each pixel once.

Cascaded shadow maps

$z_i = \lambda n(\frac{r}{n})^{i/N} + (1 - \lambda)(n + (r - n)\frac{i}{N})$, $\lambda = 0.75$, $N = 3$: cuts at 9.1, 24.2, 100 m; normal-offset lookup, 8 rotated PCF taps.


Fog, tone map, ambient

$C = TC_s + (1 - T)C_h$, $T = e^{-kd}$ $C_{\text{out}} = \frac{x(2.51x+0.03)}{x(2.43x+0.59)+0.14}$
ambient = sky diffuse + split-sum specular, times SSAO.

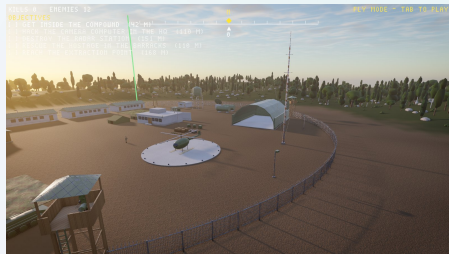

Dusk: sun, sky, haze, shadows

6. Results, verification and a bug fixed

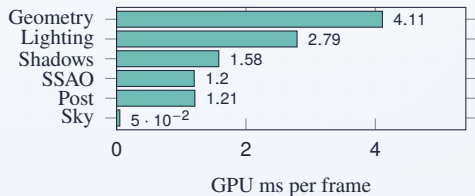

10.9 ms of the 16.7 ms budget at 1080p

Unit tests (13 packages)	281
TextureCheck (exact tiling)	8 318
RenderCheck (lighting probes)	318 567
GpuCheck	30
Playthroughs, 5/5 objectives	2

Bug: a vertical line at night. Fog sampled the whole sky, so one horizon star streaked a column; fog now uses the smooth atmosphere only.



before



after

Limits and future work

Blocky models, no true global illumination, lumpy foliage.
Next: leaf cards, screen-space GI, point-light shadows, multiplayer.

I 7. Video tour of the project

References

- [1] K. Perlin, “Improving noise,” *ACM TOG*, 21(3), 2002.
- [2] S. Worley, “A cellular texture basis function,” *SIGGRAPH*, 1996.
- [3] R. Cook, K. Torrance, “A reflectance model for computer graphics,” *ACM TOG*, 1(1), 1982.
- [4] B. Walter et al., “Microfacet models for refraction through rough surfaces,” *EGSR*, 2007.
- [5] B. Karis, “Real shading in Unreal Engine 4,” *SIGGRAPH Course*, 2013.
- [6] S. Hillaire, “A scalable and production ready sky and atmosphere rendering technique,” *CGF*, 39(4), 2020.
- [7] R. Dimitrov, “Cascaded shadow maps,” *NVIDIA*, 2007.
- [8] M. Oren, S. Nayar, “Generalization of Lambert’s reflectance model,” *SIGGRAPH*, 1994.
- [9] K. Narkowicz, “ACES filmic tone mapping curve,” 2016.
- [10] J. Jimenez, “Next generation post processing in Call of Duty: Advanced Warfare,” *SIGGRAPH*, 2014.
- [11] T. Lottes, “FXAA,” *NVIDIA*, 2009.
- [12] M. Segal, K. Akeley, *The OpenGL Graphics System, v4.1*, Khronos, 2010.
- [13] I. Quilez, “Domain warping,” iquilezles.org.
- [14] S. Hargreaves, M. Harris, “Deferred shading,” *NVIDIA*, GDC 2004.
- [15] H. Scharr, “Optimal operators in digital image processing,” Ph.D., Heidelberg, 2000.
- [16] T. Akenine-Möller et al., *Real-Time Rendering*, 4th ed., CRC Press, 2018.

Thank you

Questions are welcome
Md. Shifat Hasan · Roll 2107067