
0_database.sql

```
CREATE DATABASE IF NOT EXISTS dieta_ganadera;
```

DESC 0_database

10_nutrientes_alimentos.sql

```
USE dieta_ganadera;
```

```
CREATE TABLE nutrientes_alimentos (  
    cod_alim INT,  
    cod_nutri INT,  
    PRIMARY KEY (cod_alim, cod_nutri),  
    FOREIGN KEY (cod_alim) REFERENCES alimentos(cod_alim),  
    FOREIGN KEY (cod_nutri) REFERENCES nutrientes(cod_nutri)  
);
```

DESC 10_nutrientes_alimentos

Database changed

```
MariaDB [dieta_ganadera]> DESC nutrientes_alimentos;
```

Field	Type	Null	Key	Default	Extra
cod_alim	int(11)	NO	PRI	NULL	
cod_nutri	int(11)	NO	PRI	NULL	

2 rows in set (0,001 sec)

1_animal.sql

```
USE dieta_ganadera;
```

```
CREATE TABLE animal (
  cod_animal INT PRIMARY KEY,
  tipo VARCHAR(100) NOT NULL,
  peso FLOAT NOT NULL,
  anyo_nac INT NOT NULL,
  utilidad VARCHAR(100) NOT NULL,
  produccion VARCHAR(100) NOT NULL,
  od_animal VARCHAR(100)
);
```

DESC 1_animal

```
MariaDB [dieta_ganadera]> DESC animal
-> ;
```

Field	Type	Null	Key	Default	Extra
cod_animal	int(11)	NO	PRI	NULL	
tipo	varchar(100)	NO		NULL	
peso	float	NO		NULL	
anyo_nac	int(11)	NO		NULL	
utilidad	varchar(100)	NO		NULL	
produccion	varchar(100)	NO		NULL	
od_animal	varchar(100)	YES		NULL	

2_toma.sql

```
USE dieta_ganadera;
```

```
CREATE TABLE toma (
  cod_toma INT PRIMARY KEY,
  nom_toma VARCHAR(100) NOT NULL,
  hora_inicio INT NOT NULL,
  hora_fin INT,
  od_toma VARCHAR(100)
);
```

DESC 2_toma

MariaDB [dieta_ganadera]> DESC toma;

Field	Type	Null	Key	Default	Extra
cod_toma	int(11)	NO	PRI	NULL	
nom_toma	varchar(100)	NO		NULL	
hora_inicio	int(11)	NO		NULL	
hora_fin	int(11)	YES		NULL	
od_toma	varchar(100)	YES		NULL	

5 rows in set (0,001 sec)

3_dieta.sql

USE dieta_ganadera;

CREATE TABLE dieta (
 cod_dieta **INT PRIMARY KEY**,
 finalidad **VARCHAR(100) NOT NULL**
);

DESC 3_dieta

MariaDB [dieta_ganadera]> DESC dieta;

Field	Type	Null	Key	Default	Extra
cod_dieta	int(11)	NO	PRI	NULL	
finalidad	varchar(100)	NO		NULL	

2 rows in set (0,001 sec)

4_alimentos.sql

USE dieta_ganadera;

```
CREATE TABLE alimentos (
  cod_alim INT PRIMARY KEY,
  nom_alim VARCHAR(100) NOT NULL,
  tipo VARCHAR(100) NOT NULL,
  coste FLOAT NOT NULL,
  UNIQUE (nom_alim)
);
```

DESC 4_alimentos

```
MariaDB [dieta_ganadera]> DESC alimentos;
```

Field	Type	Null	Key	Default	Extra
cod_alim	int(11)	NO	PRI	NULL	
nom_alim	varchar(100)	NO	UNI	NULL	
tipo	varchar(100)	NO		NULL	
coste	float	NO		NULL	

```
4 rows in set (0,001 sec)
```

5_nutrientes.sql

```
USE dieta_ganadera;
```

```
CREATE TABLE nutrientes (
  cod_nutri INT PRIMARY KEY,
  nom_nutri VARCHAR(100) NOT NULL,
  magnitud VARCHAR(100),
  UNIQUE (nom_nutri)
);
```

DESC 5_nutrientes

```
MariaDB [dieta_ganadera]> DESC nutrientes;
```

Field	Type	Null	Key	Default	Extra
-------	------	------	-----	---------	-------

Field	Type	Null	Key	Default	Extra
cod_nutri	int(11)	NO	PRI	NULL	
nom_nutri	varchar(100)	NO	UNI	NULL	
magnitud	varchar(100)	YES		NULL	

3 rows in set (0,001 sec)

6_animal_toma.sql

```
USE dieta_ganadera;
```

```
CREATE TABLE animal_toma (
    cod_animal INT,
    cod_toma INT,
    PRIMARY KEY (cod_animal, cod_toma),
    FOREIGN KEY (cod_animal) REFERENCES animal(cod_animal),
    FOREIGN KEY (cod_toma) REFERENCES toma(cod_toma)
);
```

DESC 6_animal_toma

```
MariaDB [dieta_ganadera]> DESC animal_toma;
```

Field	Type	Null	Key	Default	Extra
cod_animal	int(11)	NO	PRI	NULL	
cod_toma	int(11)	NO	PRI	NULL	

2 rows in set (0,001 sec)

7_dieta_alimentos.sql

```
USE dieta_ganadera;
```

```
CREATE TABLE dieta_alimentos (
    cod_dieta INT,
```

```

    cod_alim INT,
    PRIMARY KEY (cod_dieta, cod_alim),
    FOREIGN KEY (cod_dieta) REFERENCES dieta(cod_dieta),
    FOREIGN KEY (cod_alim) REFERENCES alimentos(cod_alim)
);

```

DESC 7_dieta_alimentos

```
MariaDB [dieta_ganadera]> DESC dieta_alimentos;
```

Field	Type	Null	Key	Default	Extra
cod_dieta	int(11)	NO	PRI	NULL	
cod_alim	int(11)	NO	PRI	NULL	

```
2 rows in set (0,001 sec)
```

8_animal_dieta.sql

```
USE dieta_ganadera;
```

```

CREATE TABLE animal_dieta (
    cod_animal INT,
    cod_dieta INT,
    f_ini INT NOT NULL,
    f_fin INT,
    PRIMARY KEY (cod_animal, cod_dieta),
    FOREIGN KEY (cod_animal) REFERENCES animal(cod_animal),
    FOREIGN KEY (cod_dieta) REFERENCES dieta(cod_dieta)
);

```

DESC 8_animal_dieta

```
MariaDB [dieta_ganadera]> DESC animal_dieta;
```

Field	Type	Null	Key	Default	Extra
cod_animal	int(11)	NO	PRI	NULL	

```

| cod_dieta | int(11) | NO | PRI | NULL | |
| f_ini     | int(11) | NO |     | NULL | |
| f_fin     | int(11) | YES|     | NULL | |
+-----+-----+-----+-----+-----+-----+
4 rows in set (0,001 sec)

```

9_toma_alimentos.sql

```
USE dieta_ganadera;
```

```

CREATE TABLE toma_alimentos (
    cod_toma INT,
    cod_alim INT,
    cantidad FLOAT NOT NULL,
    PRIMARY KEY (cod_toma, cod_alim),
    FOREIGN KEY (cod_toma) REFERENCES toma(cod_toma),
    FOREIGN KEY (cod_alim) REFERENCES alimentos(cod_alim)
);

```

DESC 9_toma_alimentos

```

MariaDB [dieta_ganadera]> DESC toma_alimentos;
+-----+-----+-----+-----+-----+-----+
| Field    | Type    | Null | Key | Default | Extra |
+-----+-----+-----+-----+-----+-----+
| cod_toma | int(11) | NO   | PRI | NULL    |       |
| cod_alim | int(11) | NO   | PRI | NULL    |       |
| cantidad | float   | NO   |     | NULL    |       |
+-----+-----+-----+-----+-----+-----+
3 rows in set (0,001 sec)

```

Diagrama

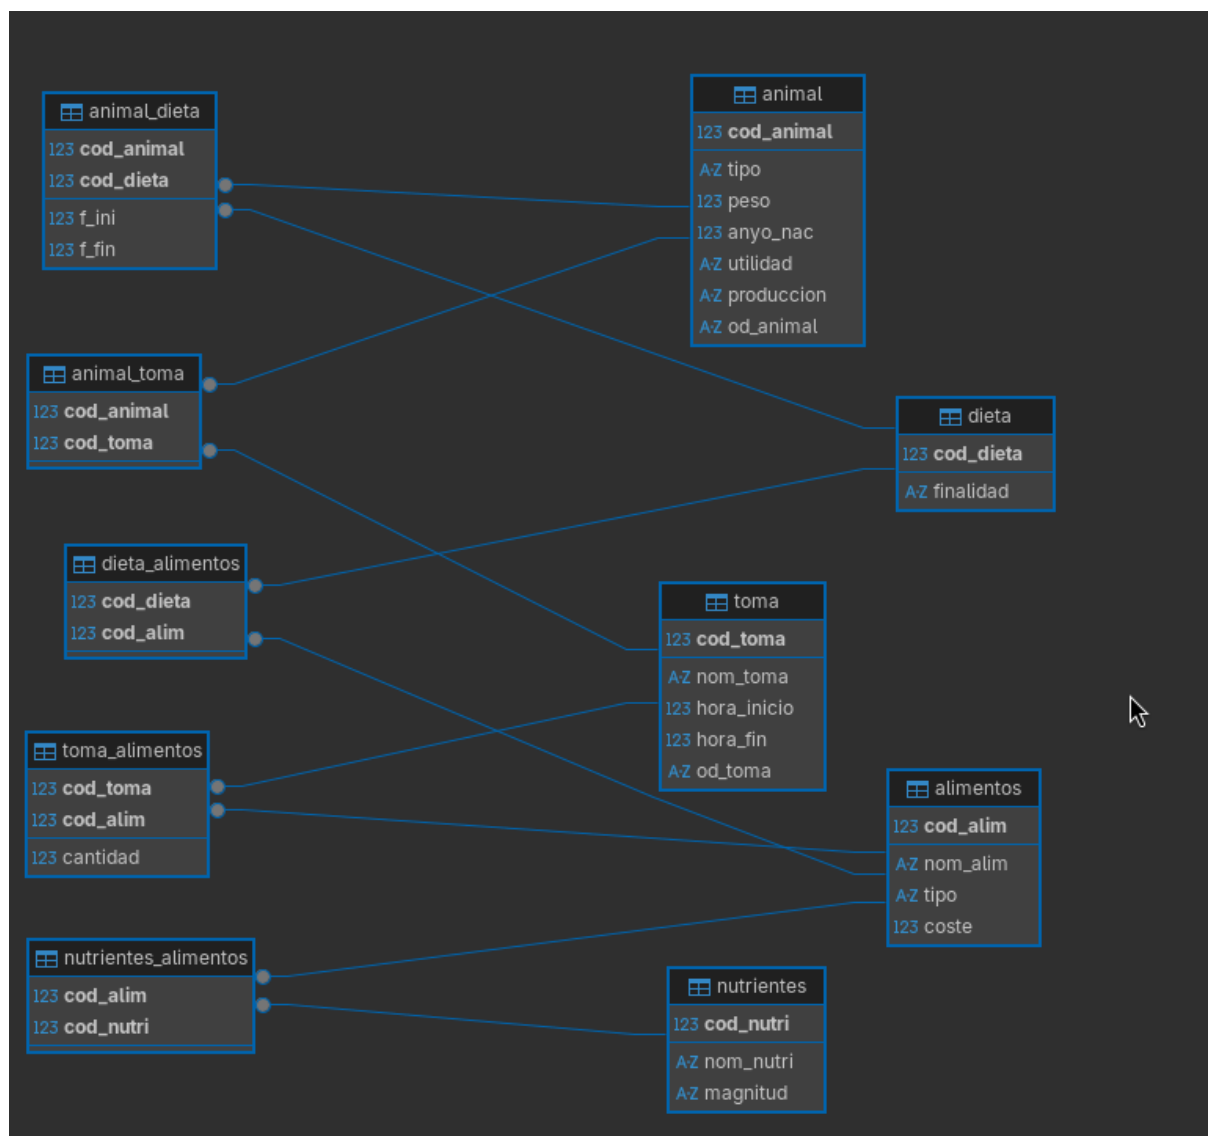


Figure 1: Diagrama Foto