




Backup and Restore

1. Check Schema (sql_clause_lab)

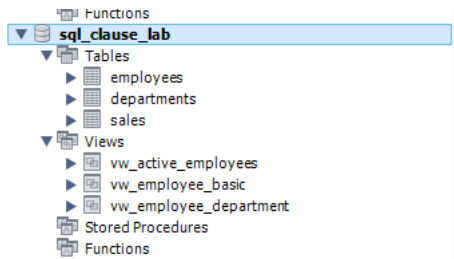



2. Data Backup
3. Click Server\Data Export

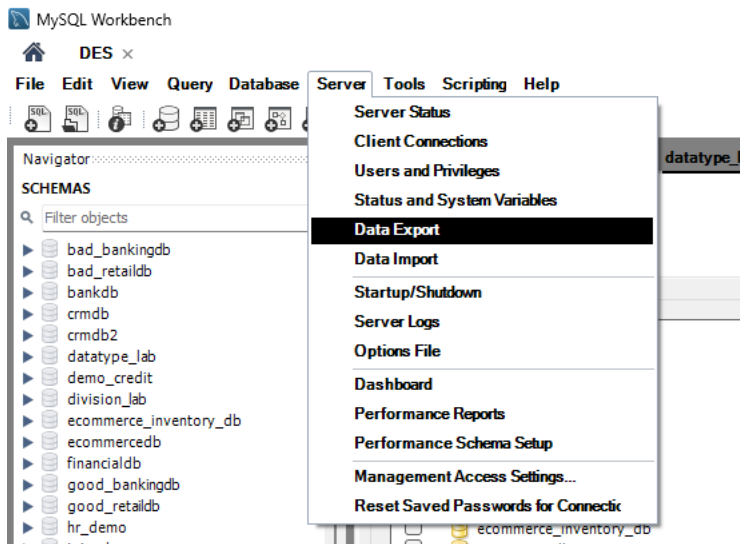

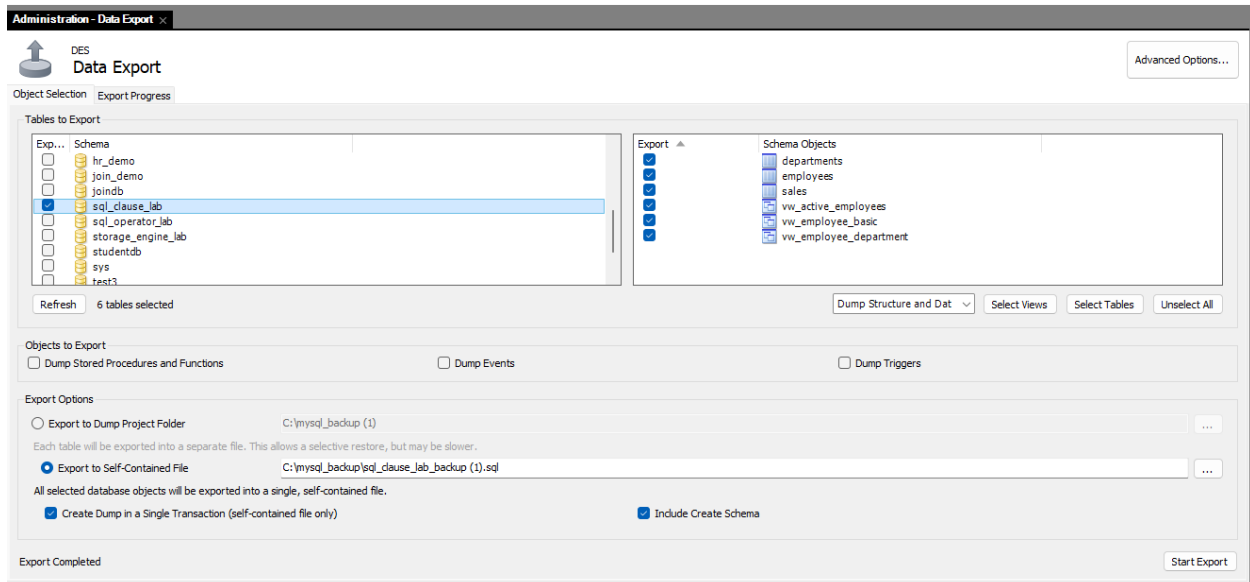


4. Check in folder

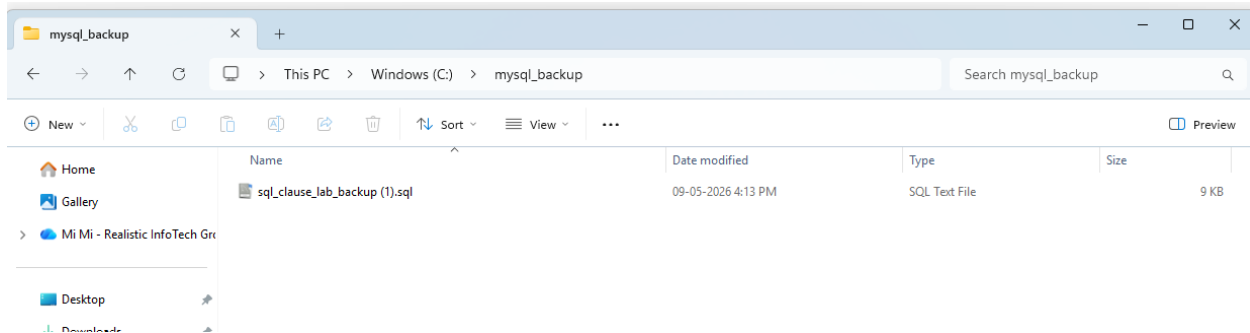

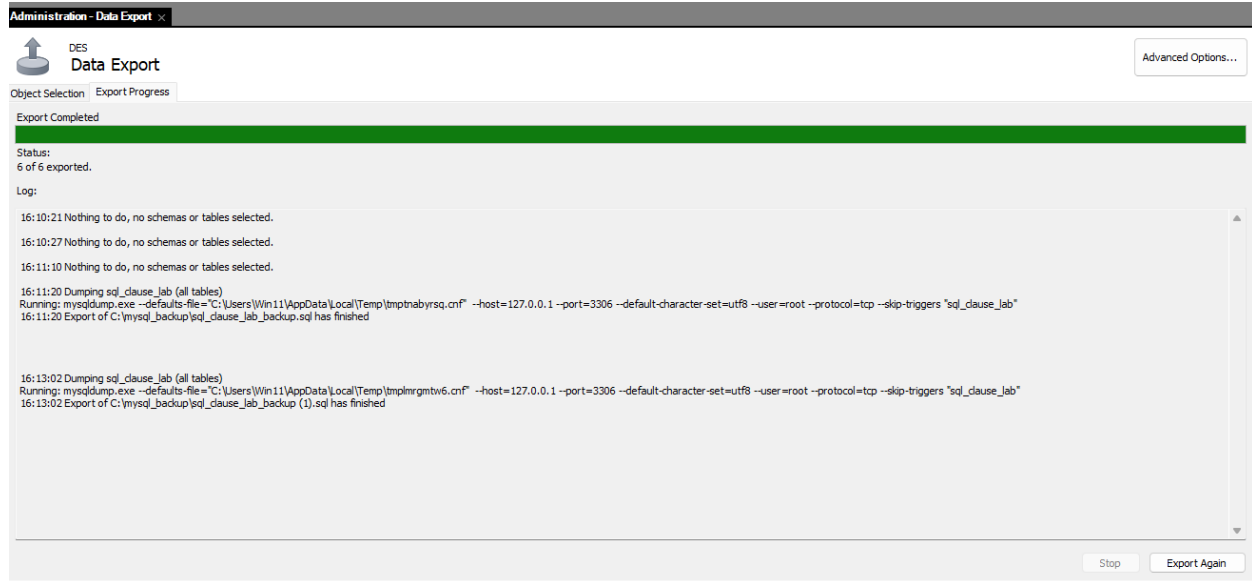

5. Drop database (sql_clause_lab)
6. Create sql_clause_lab database

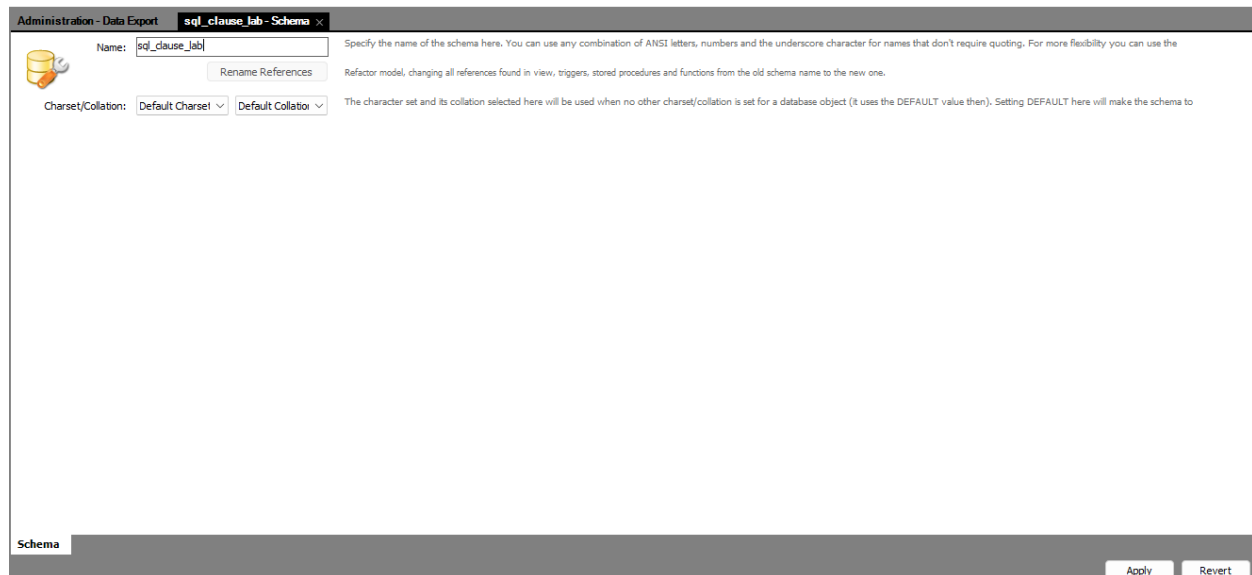

Apply SQL Script to Database

Review SQL Script

Apply SQL Script

Review the SQL Script to be Applied on the Database

Online DDL

Algorithm: Default Lock Type: Default

1 CREATE SCHEMA `sql\_clause\_lab` ;
2

Back Apply Cancel

Apply SQL Script to Database

Review SQL Script

Apply SQL Script

Applying SQL script to the database

The following tasks will now be executed. Please monitor the execution.
Press Show Logs to see the execution logs.

☒ Execute SQL Statements

SQL script was successfully applied to the database.

Show Logs

Back Finish Cancel

7. Server\ Data Import

Administration - Data ImportR... x sql_clause_lab - Schema

DES
Data Import

Import from Disk Import Progress

Import Options

☐ Import from Dump Project Folder C:\Users\Win11\Documents\dumps ...
Select the Dump Project Folder to import. You can do a selective restore.
Load Folder Contents

☒ Import from Self-Contained File C:\mysql_backup\sql_clause_lab_backup (1).sql ...
Select the SQL/dump file to import. Please note that the whole file will be imported.

Default Schema to be Imported To

Default Target Schema: sql_clause_lab New...
The default schema to import the dump into.
NOTE: this is only used if the dump file doesn't contain its schema, otherwise it is ignored.

Select Database Objects to Import (only available for Project Folders)

Imp...	Schema
--------	--------

Imp...	Schema Objects
--------	----------------

Dump Structure and Dat Select Views Select Tables Unselect All

Press [Start Import] to start... Start Import

Administration - Data ImportR... x sql_clause_lab - Schema

DES
Data Import

Import from Disk Import Progress

Import Completed

Status:
1 of 1 imported.

Log:

```
16:19:12 Restoring C:\mysql_backup\sql_clause_lab_backup (1).sql  
Running: mysql.exe --defaults-file="C:\Users\Win11\AppData\Local\Temp\lmp4038d5rl.cnf" --protocol=tcp --host=127.0.0.1 --user=root --port=3306 --default-character-set=utf8 --comments --database=sql_clause_lab < "C:\mysql_backup\  
sql_clause_lab_backup (1).sql"  
16:19:13 Import of C:\mysql_backup\sql_clause_lab_backup (1).sql has finished
```

Stop Import Again

8. Check database (sql_clause_lab)

