

QUESTION 1

Profile card with props

```
//components/Profilecard.js

import React from 'react';
import './profile.css'

const ProfileCard = (props) => {
  return (
    <>
    <div className="profile-card">
      <div className='card'>
        
        <h1>{props.name}</h1>
        <p>{props.description}</p>
      </div>
    </div>
    </>
  )
}

export default ProfileCard;

//App.js

import ProfileCard from './components/ProfileCard';
```

```
import './App.css';
```

```
function App() {
```

```
  return (
```

```
    <div>
```

```
      <ProfileCard name="XYZ" description="A passionate Web Developer and tech enthusiast" />
```


```
      <ProfileCard name="ABC" description="a graphic designer with a love for digital art" />
```

```
    </div>
```

```
  );
```

```
}
```

```
export default App;
```

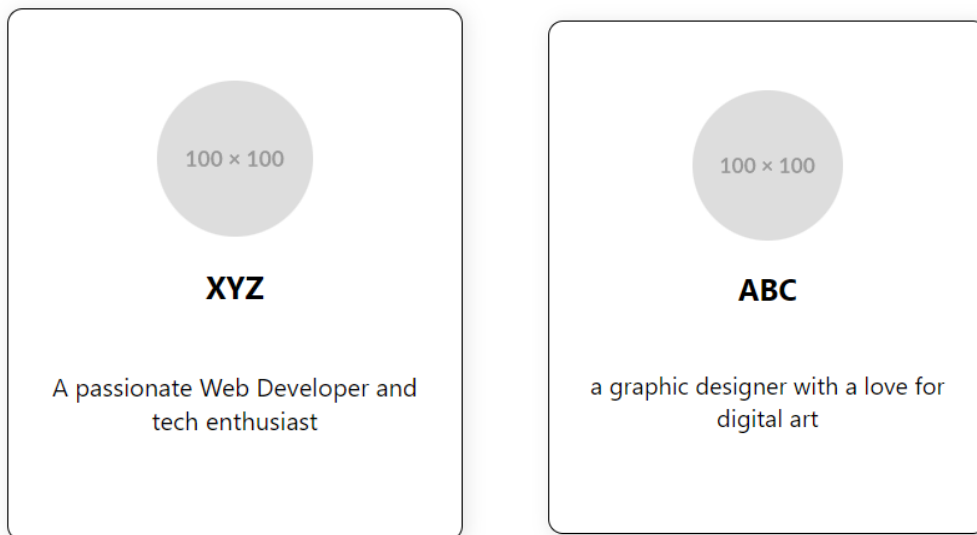

QUESTION 2

Map function –

```
let arr = [1000,4000,500,2000];
```

```
let yearlySalary = arr.map(num => num*12);
```

```
console.log(yearlySalary);
```

```
[Running] node "d:\LPU\FRONTEND-REACT\ca.js"  
[ 12000, 48000, 6000, 24000 ]  
  
[Done] exited with code=0 in 0.208 seconds
```