Create a simple script file and push it to repo. Create a project in Jenkins connected to your GitHub repository. When a commit is made to your repo, automatically build must get triggered from Jenkins and the output must be shared to me via email.

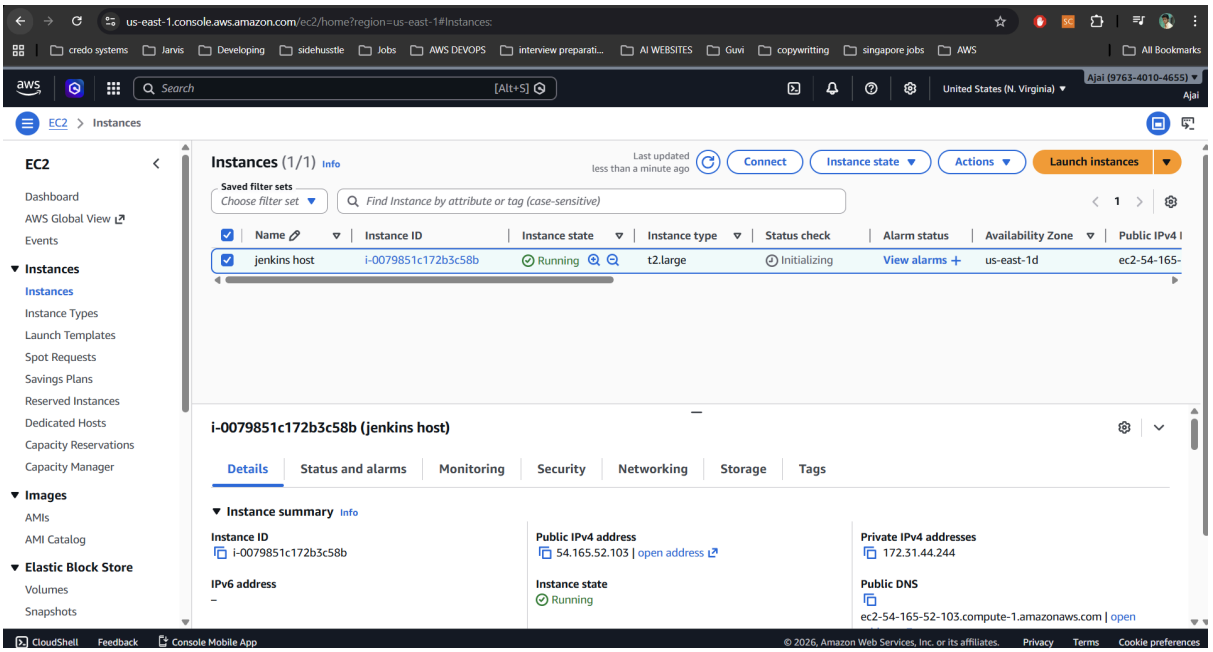

After i have created a Ec2 instance, I have installed a packages of jenkins.

```
sudo apt update
sudo apt install fontconfig openjdk-21-jre
java -version

sudo wget -O /etc/apt/keyrings/jenkins-keyring.asc \
  https://pkg.jenkins.io/debian-stable/jenkins.io-2026.key
echo "deb [signed-by=/etc/apt/keyrings/jenkins-keyring.asc]" \
  https://pkg.jenkins.io/debian-stable binary/ | sudo tee \
  /etc/apt/sources.list.d/jenkins.list > /dev/null
sudo apt update
sudo apt install jenkins

sudo systemctl enable jenkins

sudo systemctl start jenkins

sudo systemctl status jenkins
```

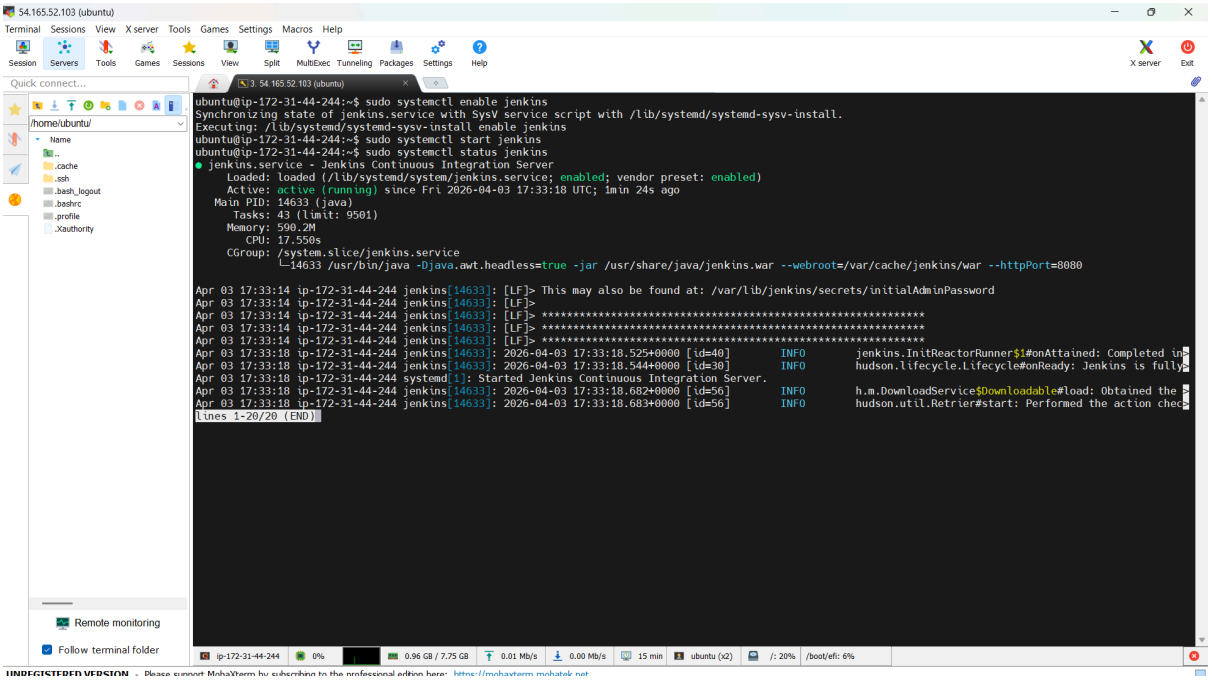
54.165.52.103 (ubuntu)
ubuntu@ip-172-31-44-244:~$ sudo systemctl enable jenkins
Synchronizing state of jenkins.service with SysV service script with /lib/systemd/systemd-sysv-install.
Executing: /lib/systemd/systemd-sysv-install enable jenkins
ubuntu@ip-172-31-44-244:~$ sudo systemctl start jenkins
ubuntu@ip-172-31-44-244:~$ sudo systemctl status jenkins
● jenkins.service - Jenkins Continuous Integration Server
Loaded: loaded (/lib/systemd/system/jenkins.service; enabled; vendor preset: enabled)
Active: active (running) since Fri 2026-04-03 17:33:18 UTC; 1min 24s ago
Main PID: 14633 (java)
Tasks: 43 (limit: 9501)
Memory: 590.2M
CPU: 17.550s
CGroup: /system.slice/jenkins.service
└─14633 /usr/bin/java -Djava.awt.headless=true -jar /usr/share/java/jenkins.war --webroot=/var/cache/jenkins/war --httpPort=8080
Apr 03 17:33:14 ip-172-31-44-244 jenkins[14633]: [LF]> This may also be found at: /var/lib/jenkins/secrets/initialAdminPassword
Apr 03 17:33:14 ip-172-31-44-244 jenkins[14633]: [LF]>
Apr 03 17:33:14 ip-172-31-44-244 jenkins[14633]: [LF]> *********
Apr 03 17:33:14 ip-172-31-44-244 jenkins[14633]: [LF]> *********
Apr 03 17:33:14 ip-172-31-44-244 jenkins[14633]: [LF]> *********
Apr 03 17:33:18 ip-172-31-44-244 jenkins[14633]: 2026-04-03 17:33:18.525+0000 [id=40] INFO jenkins.InitReactorRunner$1#onAttained: Completed in
Apr 03 17:33:18 ip-172-31-44-244 jenkins[14633]: 2026-04-03 17:33:18.544+0000 [id=30] INFO hudson.lifecycle.Lifecycle#onReady: Jenkins is fully
Apr 03 17:33:18 ip-172-31-44-244 systemd[1]: Started Jenkins Continuous Integration Server.
Apr 03 17:33:18 ip-172-31-44-244 jenkins[14633]: 2026-04-03 17:33:18.682+0000 [id=56] INFO h.m.DownloadService$Downloadable#load: Obtained the
Apr 03 17:33:18 ip-172-31-44-244 jenkins[14633]: 2026-04-03 17:33:18.683+0000 [id=56] INFO hudson.util.Retrier#start: Performed the action chec
lines 1-20/20 (END)

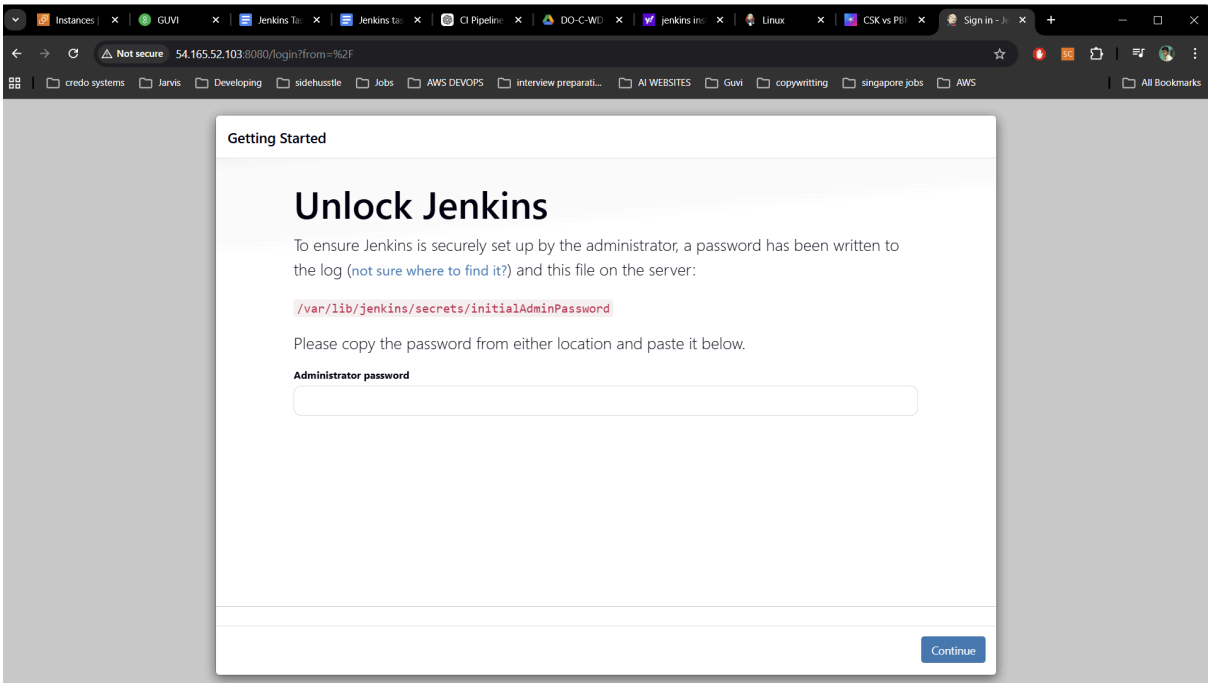
Not secure
54.165.52.103:8080/login?from=%2F
Getting Started
Unlock Jenkins
To ensure Jenkins is securely set up by the administrator, a password has been written to the log (not sure where to find it?) and this file on the server:
/var/lib/jenkins/secrets/initialAdminPassword
Please copy the password from either location and paste it below.
Administrator password
Continue

I have a code ready for deployment.

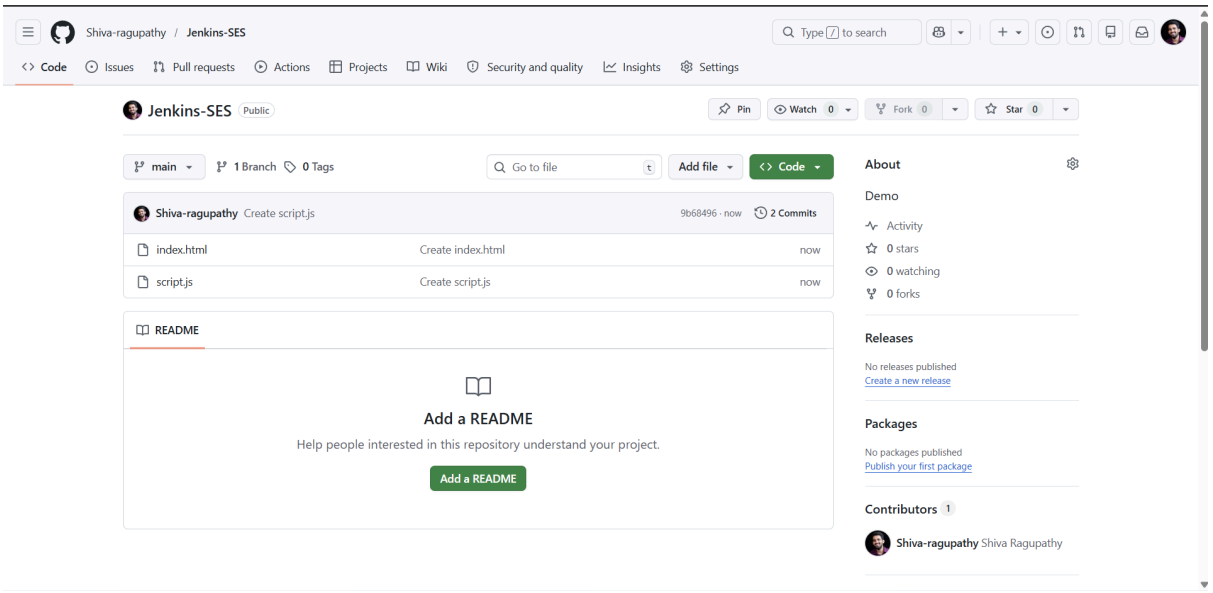

In the jenkins dashboard select a new Item —---> Freestyle project —---> Item name—-- > Build-simple site select ok

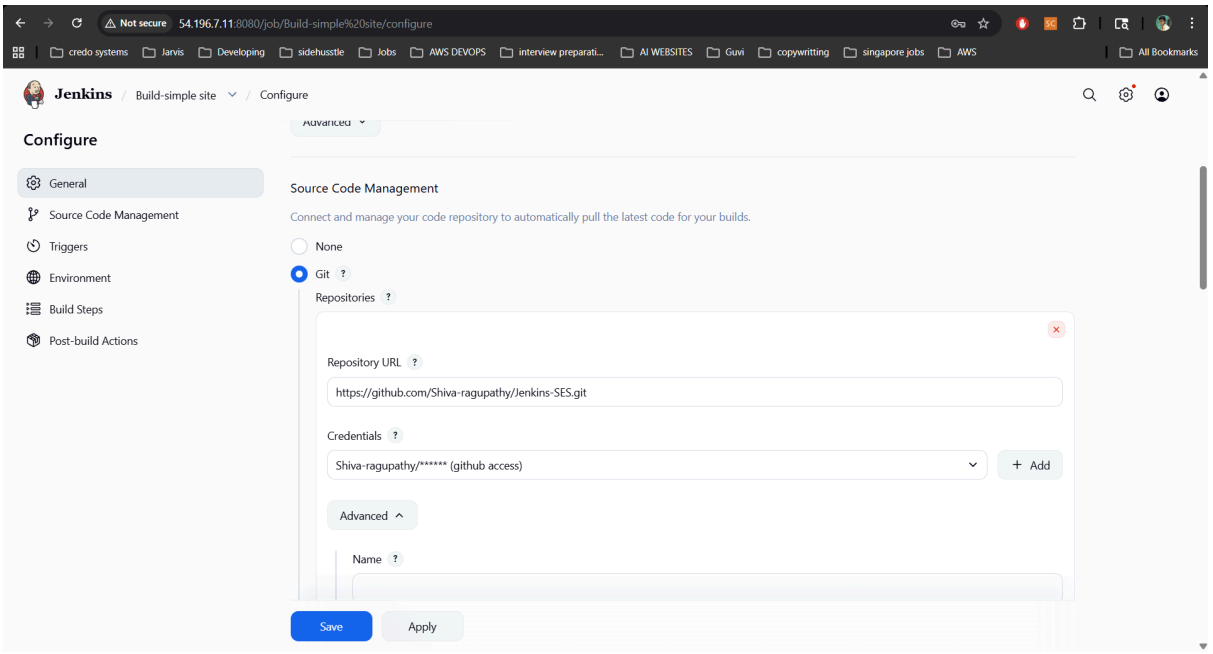

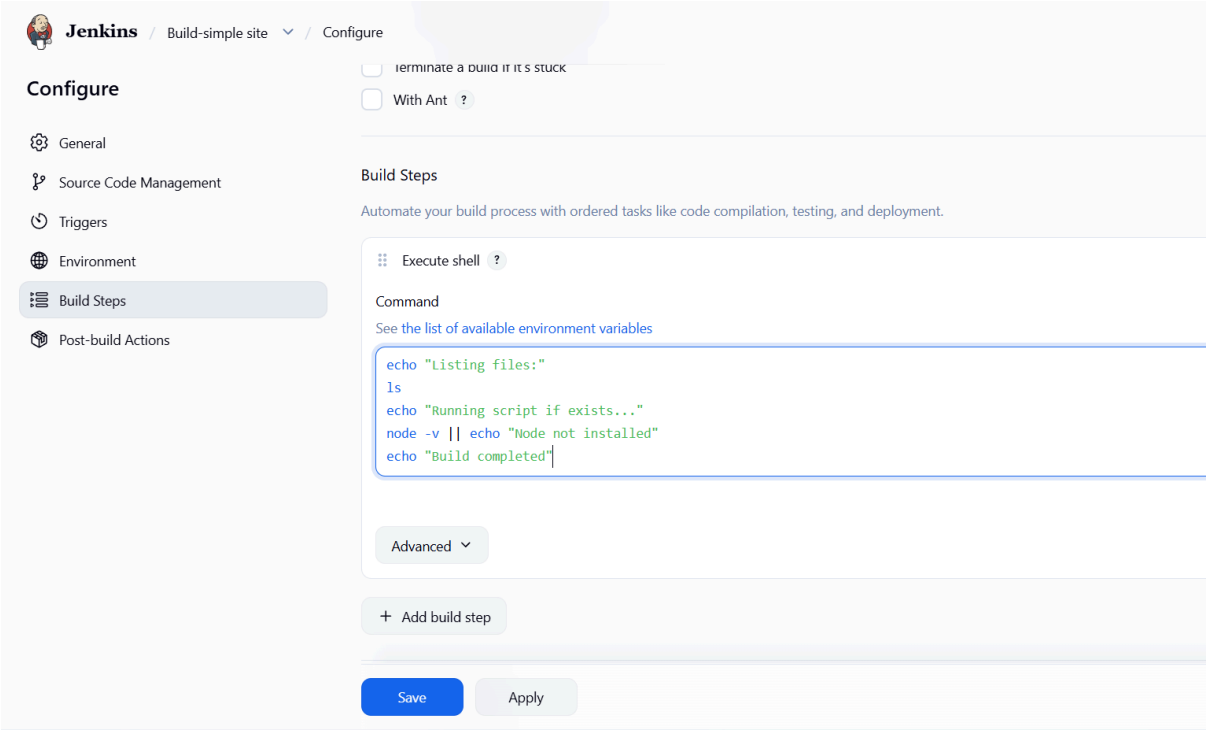

Next I am navigating to AWS creating a SES service.

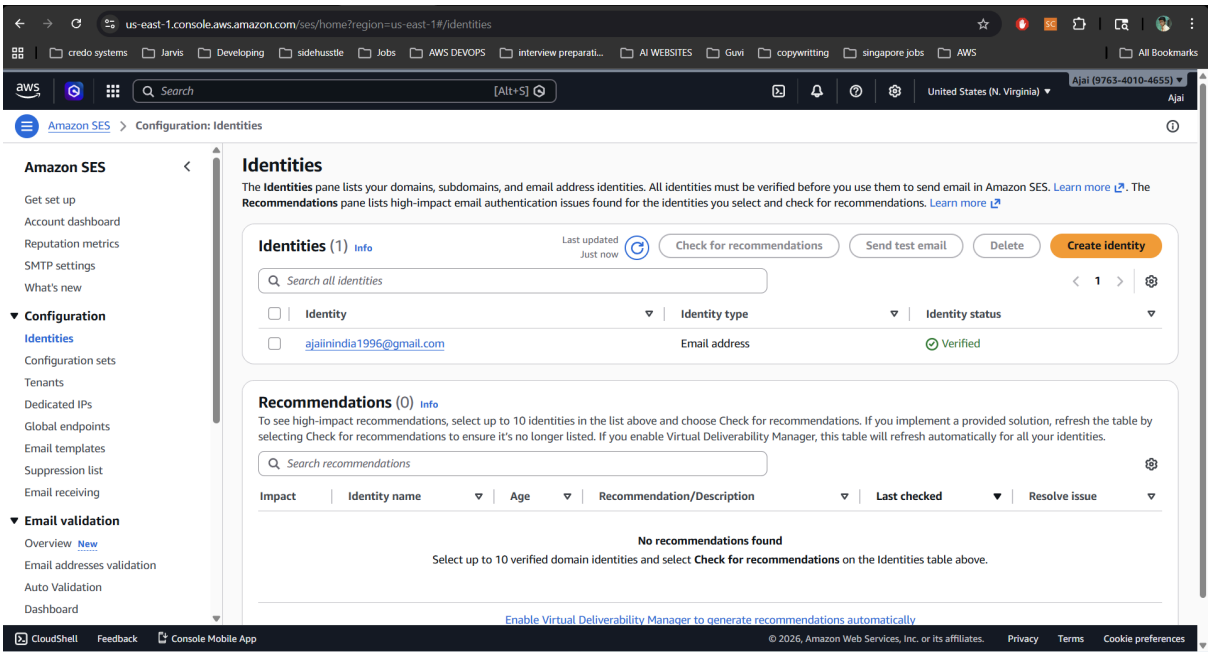

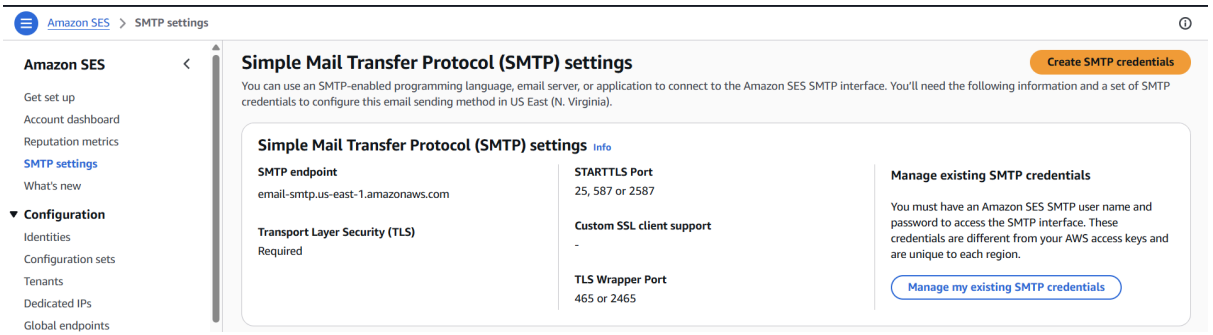

At next i will configure my STMP in manage jenkins and add a credentials and run in a pipeline output should be send in my email

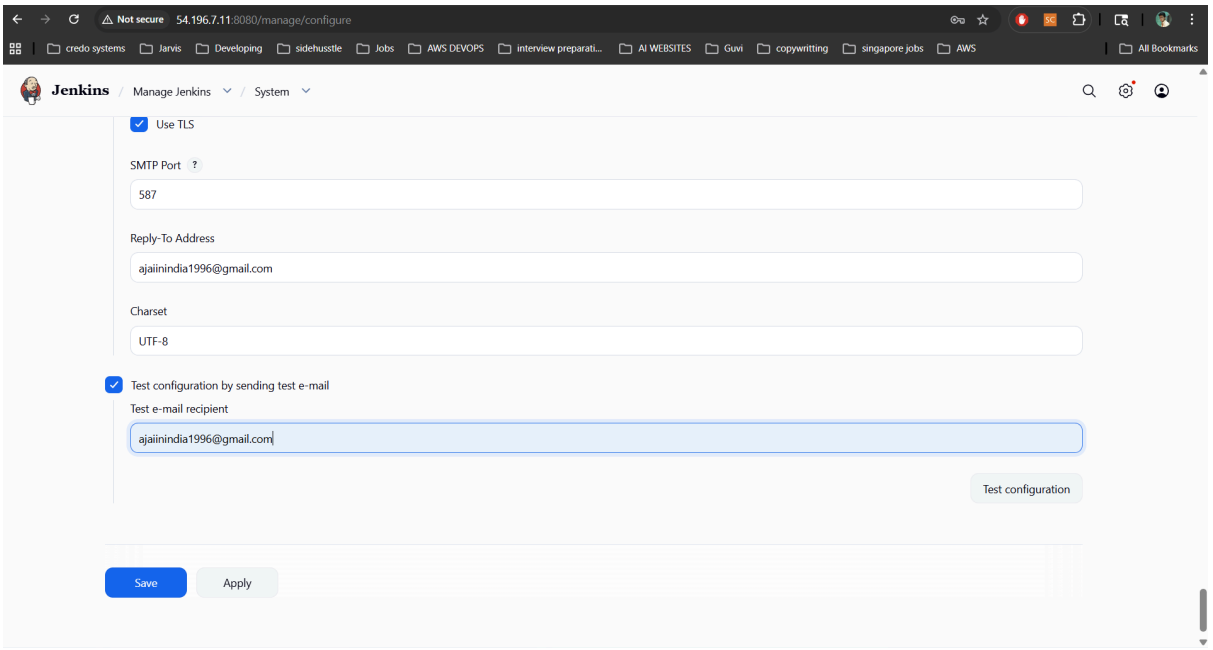

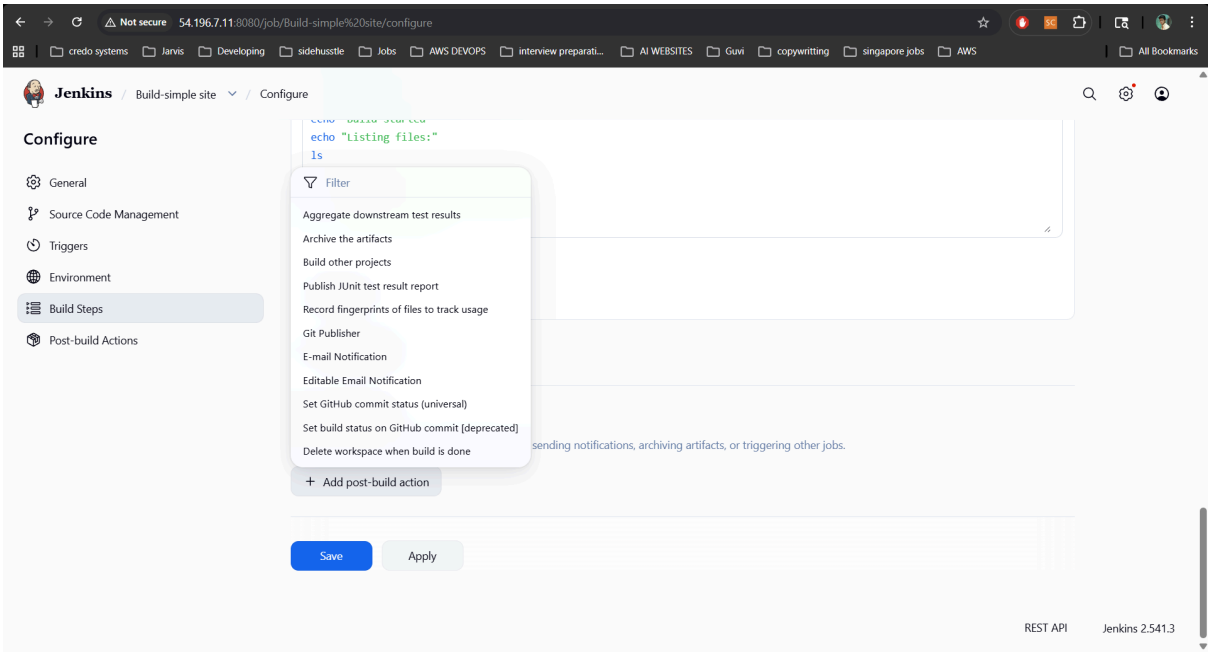

My build is successful

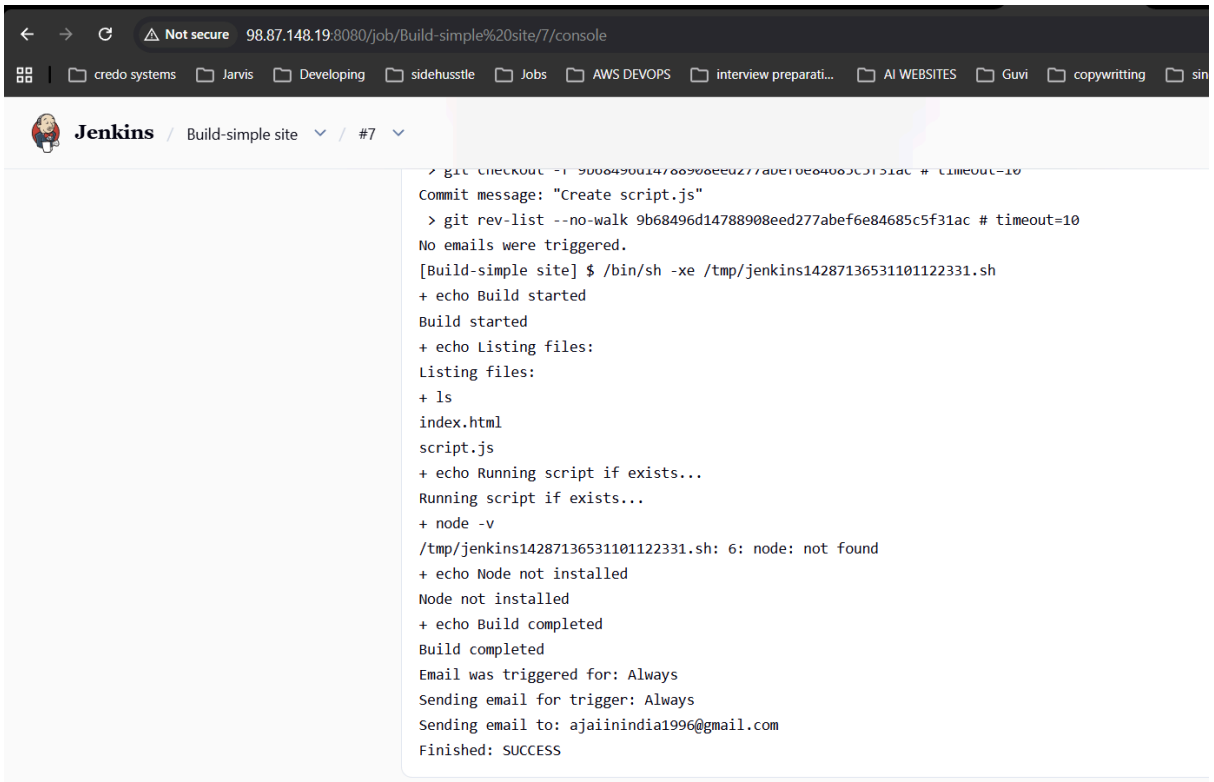
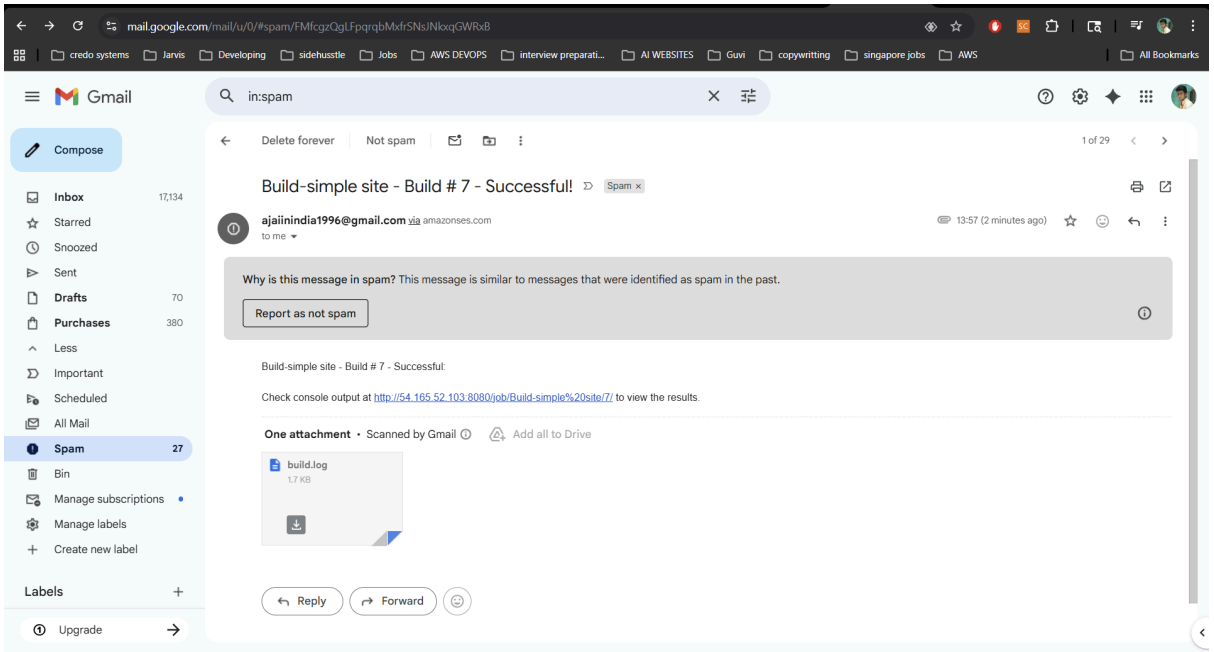
Output was sent to my email