Establish a new directory, populate it with script files, initiate an empty repository on GitHub, convert the local directory into a Git repository, and link it to GitHub for pushing the code into the repository.Perform merge, rebase, stash commands in following github repo.

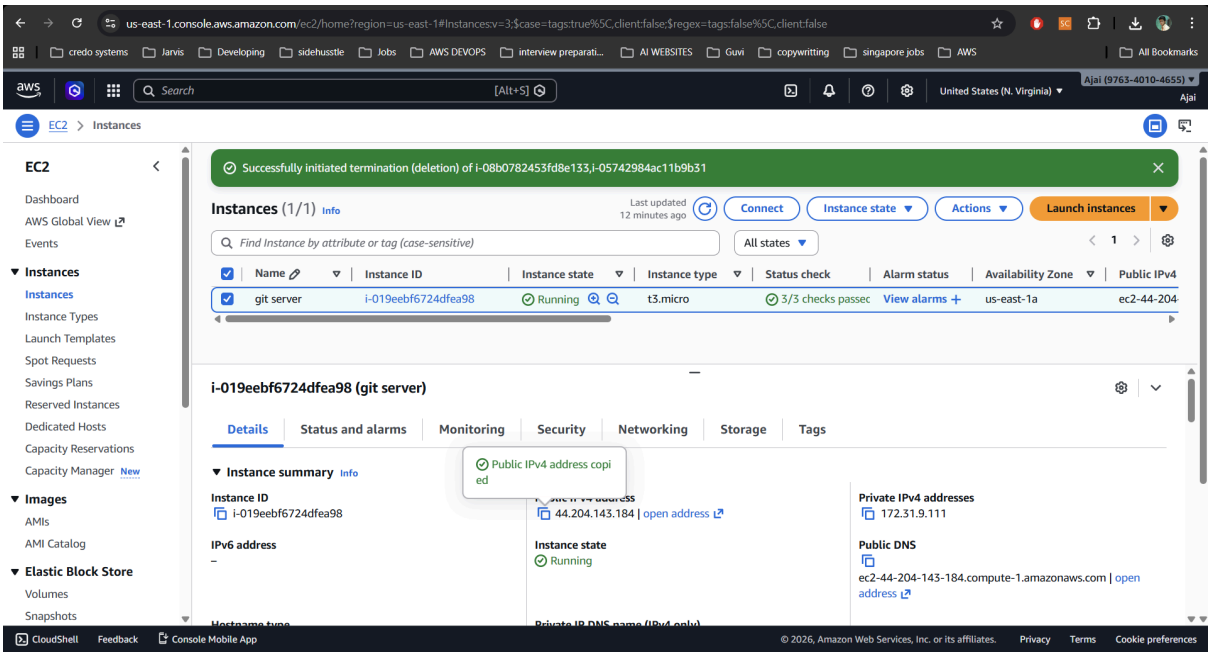

First, I connected VS Code to my remote server using an SSH key by configuring the hostname and identity file in the SSH configuration file. Then, I established the SSH connection through VS Code.

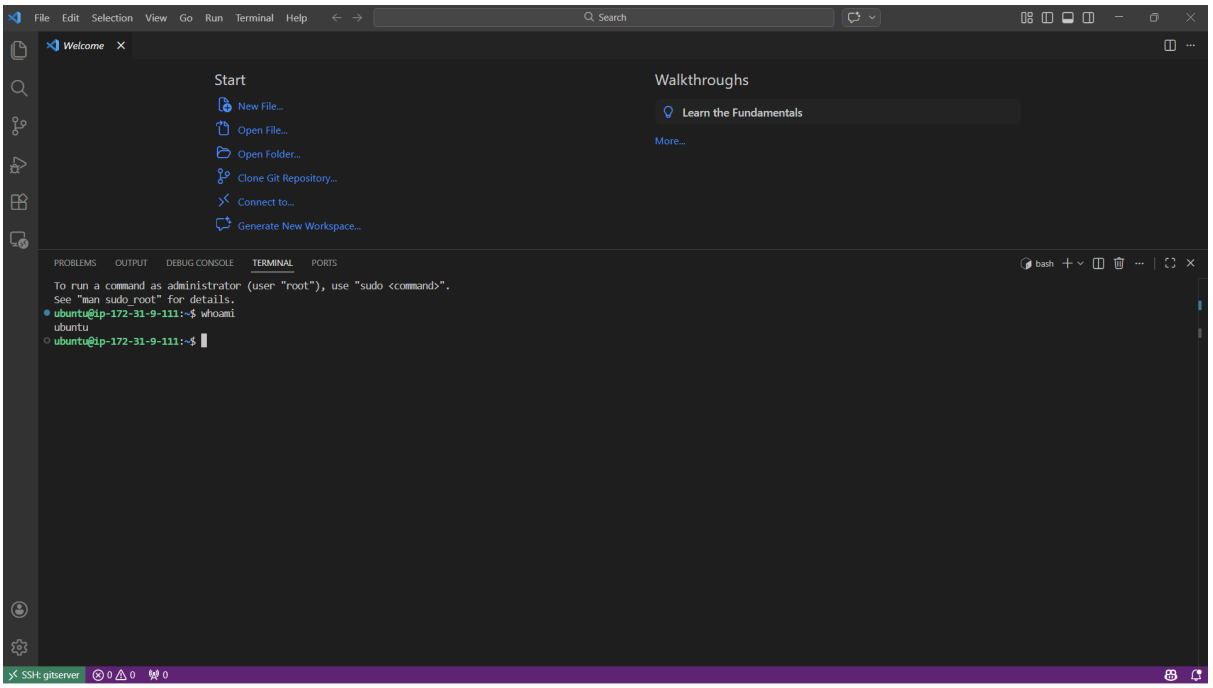

Next, I created a new directory named New-proj001 using the mkdir command.

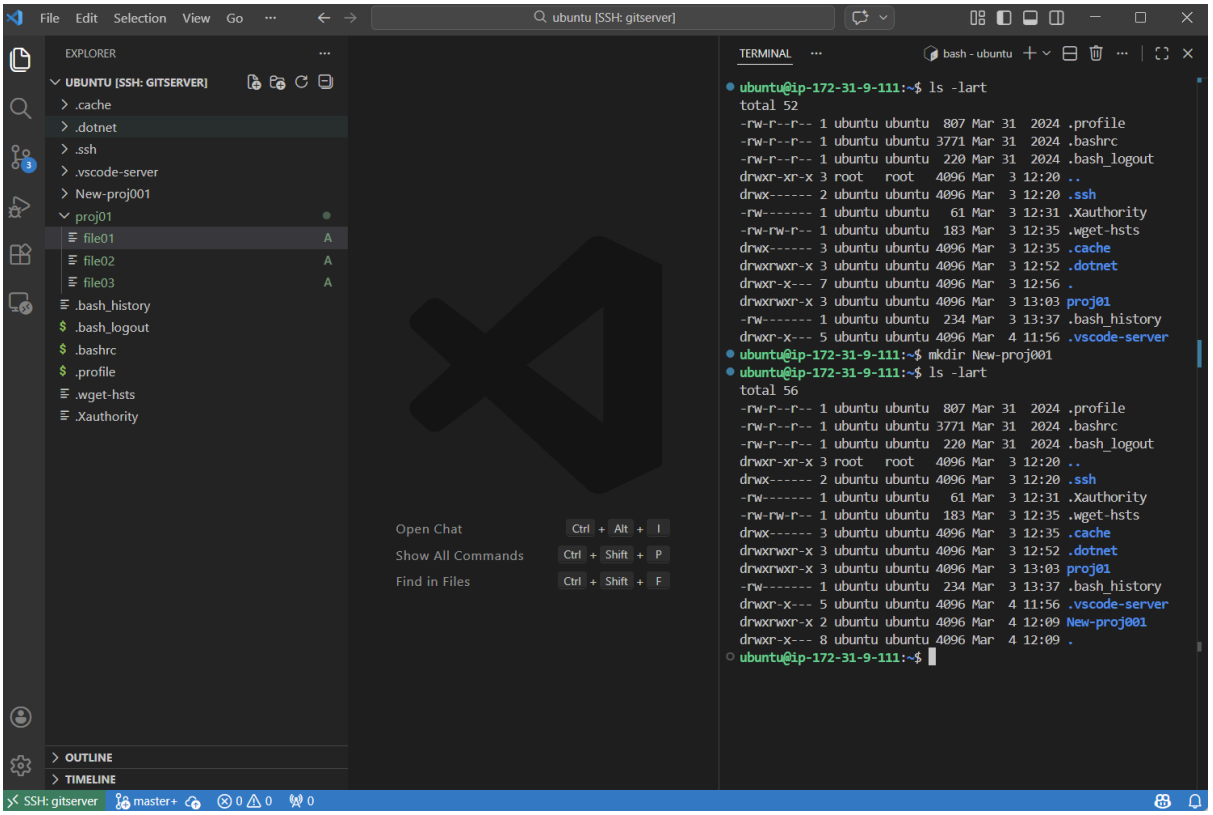

After that, I created three files: app.txt, html.txt, and js.txt, and initialized a Git repository in the folder using the git init command.

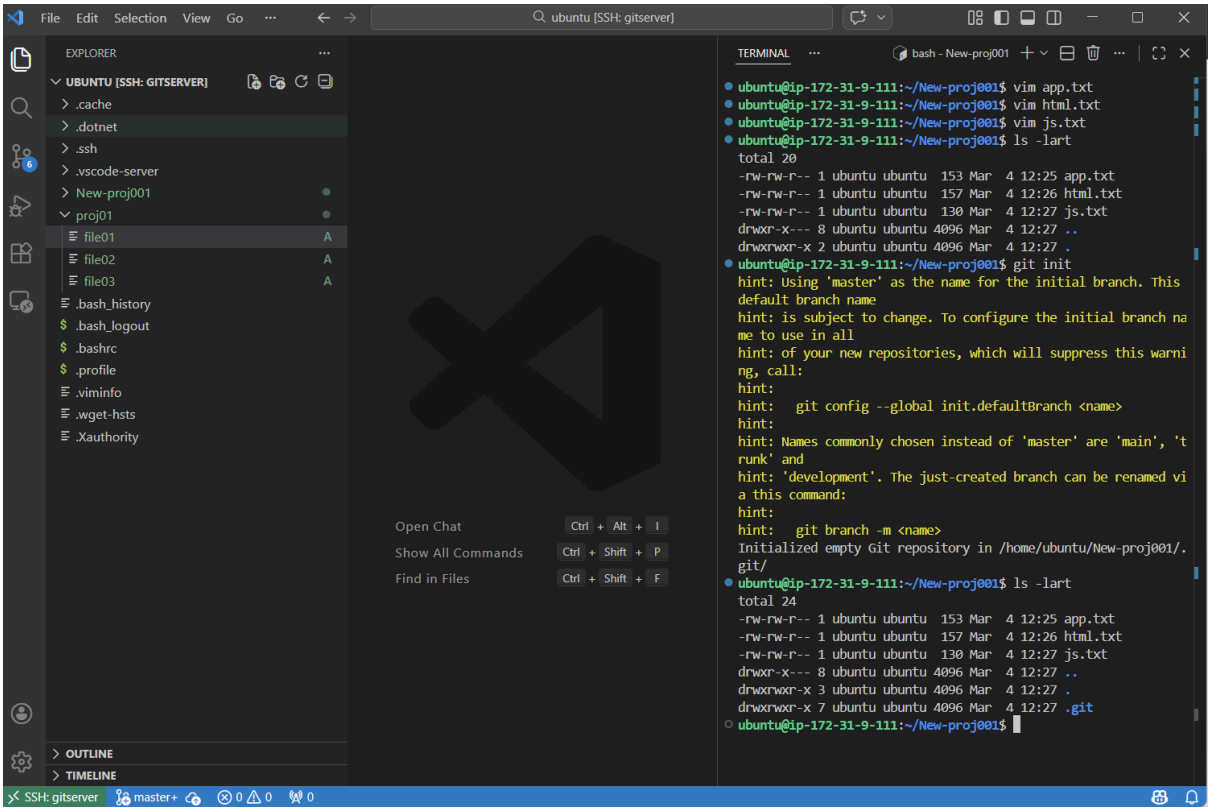

Then, I created an empty repository on GitHub.

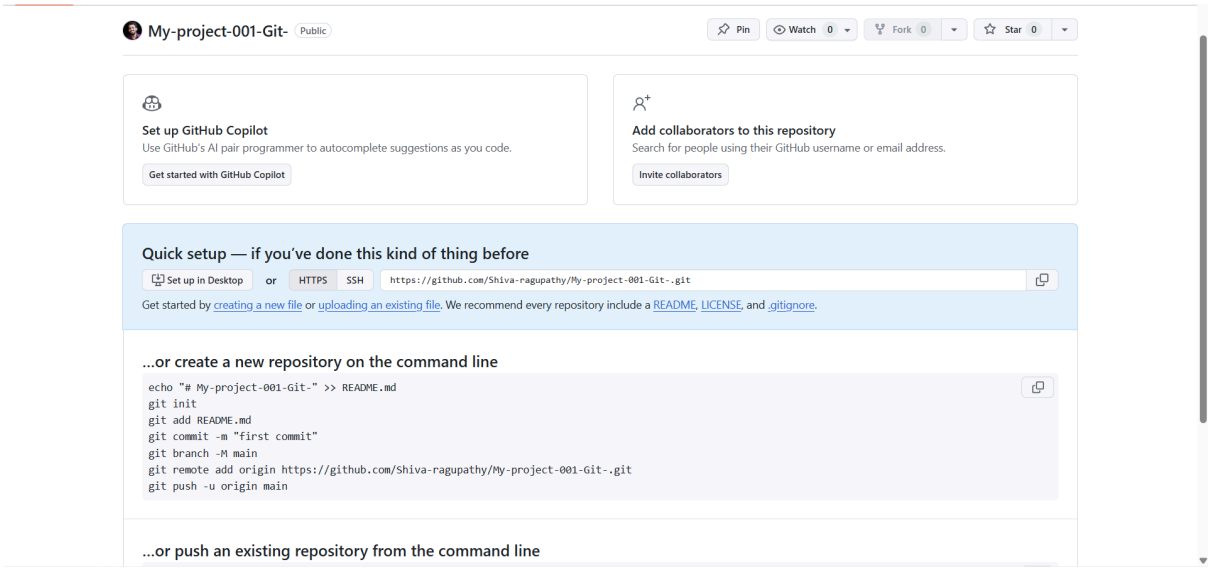

Since Git was already initialized locally, I added the files and committed them to the main branch.

Finally, I connected my local repository to the GitHub repository using the command:

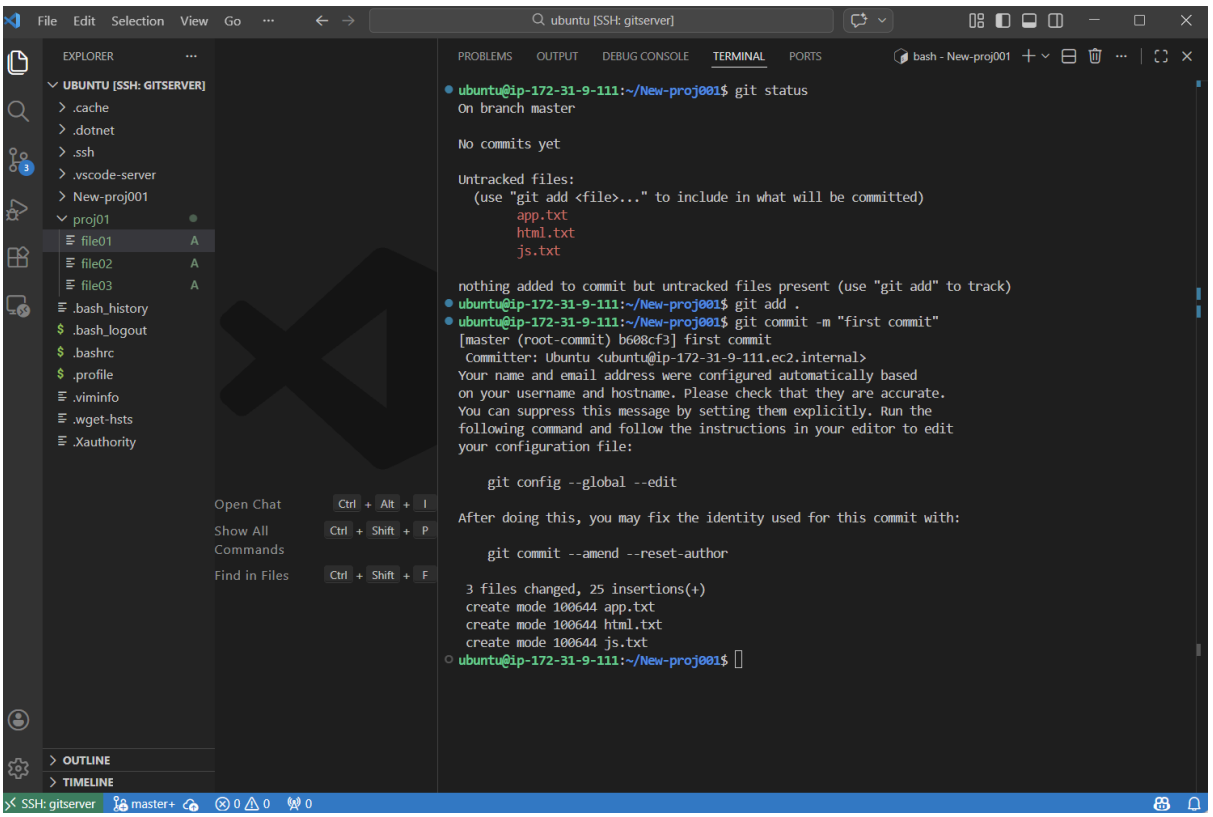

Next I will connect my local repo to github repo by using a command

git remote add origin

`https://github.com/Shiva-ragupathy/My-project-001-Git-.git`

Git remote -v

```
ubuntu@ip-172-31-9-111:~/New-proj001$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        app.txt
        html.txt
        js.txt

nothing added to commit but untracked files present (use "git add" to track)
ubuntu@ip-172-31-9-111:~/New-proj001$ git add .
ubuntu@ip-172-31-9-111:~/New-proj001$ git commit -m "first commit"
[master (root-commit) b608cf3] first commit
 Committer: Ubuntu <ubuntu@ip-172-31-9-111.ec2.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

 3 files changed, 25 insertions(+)
 create mode 100644 app.txt
 create mode 100644 html.txt
 create mode 100644 js.txt
ubuntu@ip-172-31-9-111:~/New-proj001$ git branch -m main
ubuntu@ip-172-31-9-111:~/New-proj001$ git remote add origin https://github.com/Shiva-ragupathy/My-pro
ject-001-Git-.git
ubuntu@ip-172-31-9-111:~/New-proj001$ git remote -v
origin  https://github.com/Shiva-ragupathy/My-project-001-Git-.git (fetch)
origin  https://github.com/Shiva-ragupathy/My-project-001-Git-.git (push)
ubuntu@ip-172-31-9-111:~/New-proj001$
```

```
ubuntu@ip-172-31-9-111:~/New-proj001$ git status

nothing added to commit but untracked files present (use "git add" to track)
ubuntu@ip-172-31-9-111:~/New-proj001$ git add .
ubuntu@ip-172-31-9-111:~/New-proj001$ git commit -m "first commit"
[master (root-commit) b608cf3] first commit
 Committer: Ubuntu <ubuntu@ip-172-31-9-111.ec2.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

 3 files changed, 25 insertions(+)
 create mode 100644 app.txt
 create mode 100644 html.txt
 create mode 100644 js.txt
ubuntu@ip-172-31-9-111:~/New-proj001$ git branch -m main
ubuntu@ip-172-31-9-111:~/New-proj001$ git remote add origin https://github.com/Shiva-ragupathy/My-pro
ject-001-Git-.git
ubuntu@ip-172-31-9-111:~/New-proj001$ git remote -v
origin  https://github.com/Shiva-ragupathy/My-project-001-Git-.git (fetch)
origin  https://github.com/Shiva-ragupathy/My-project-001-Git-.git (push)
ubuntu@ip-172-31-9-111:~/New-proj001$ git push -u origin main
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 2 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (5/5), 632 bytes | 632.00 KiB/s, done.
Total 5 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/Shiva-ragupathy/My-project-001-Git-.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
ubuntu@ip-172-31-9-111:~/New-proj001$
```

Next I will push my code to Git hub

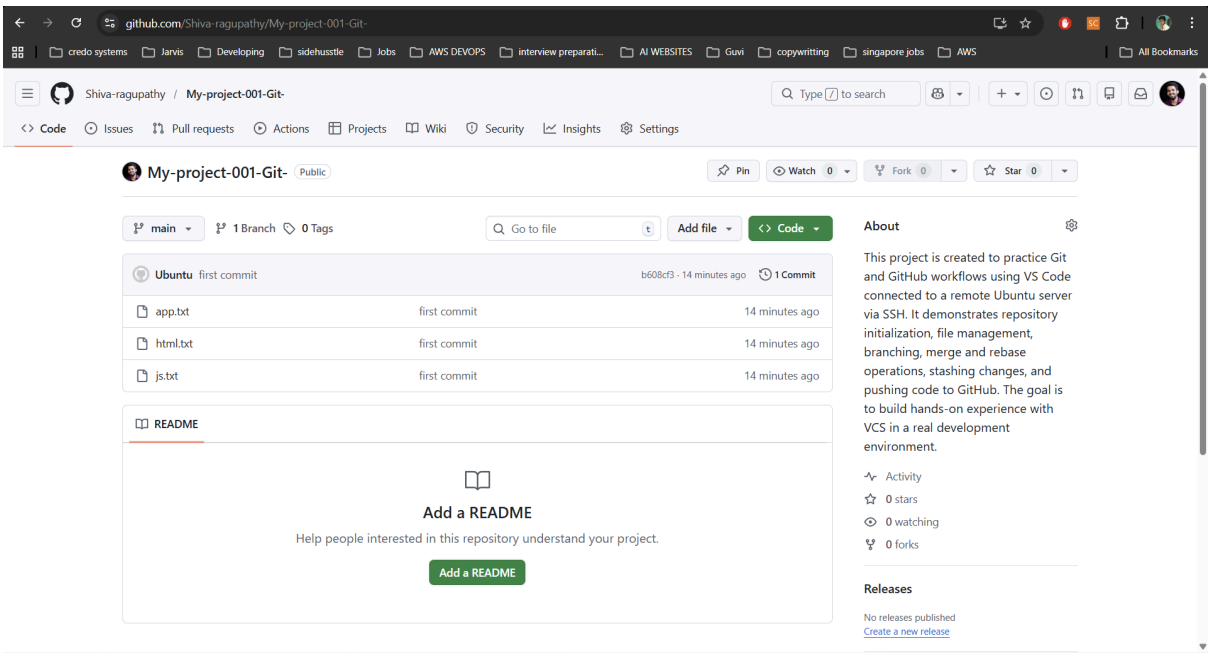

Perform merge, rebase, stash commands in following github repo.

Git merge: By creating a new branch using this command

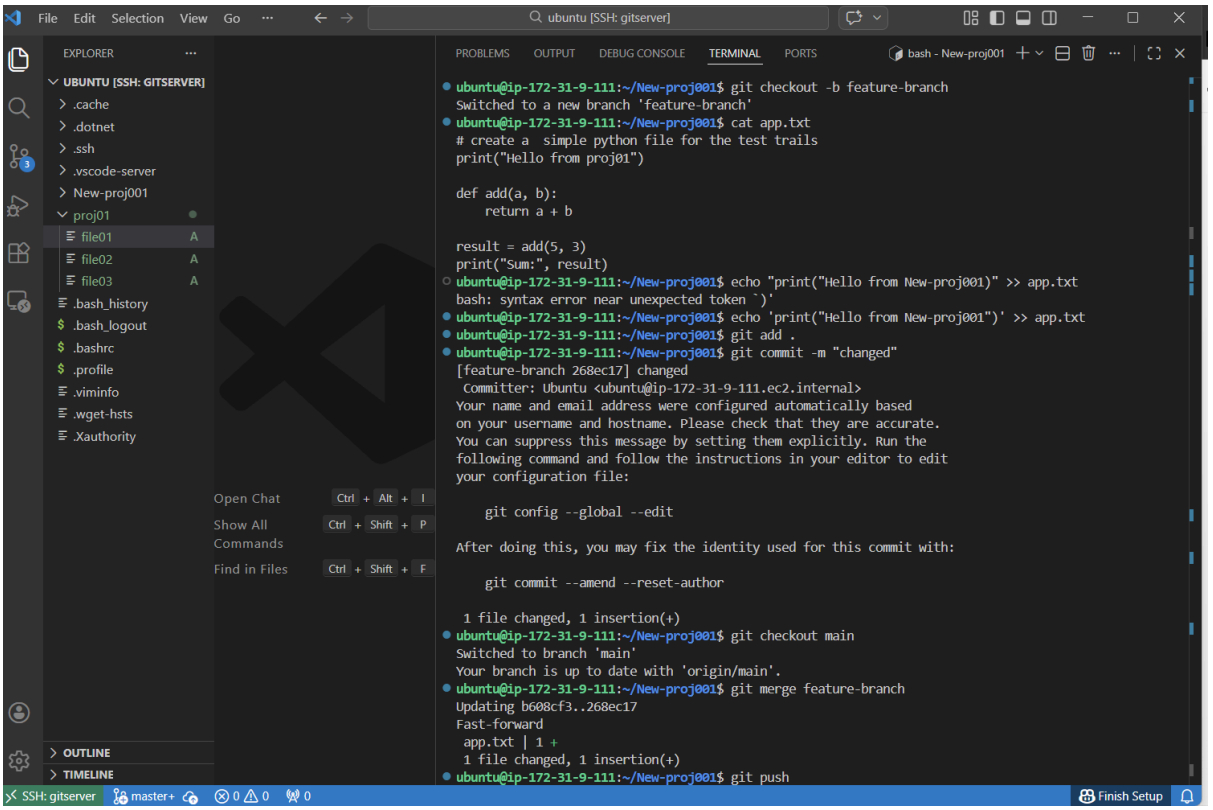

Git re-base

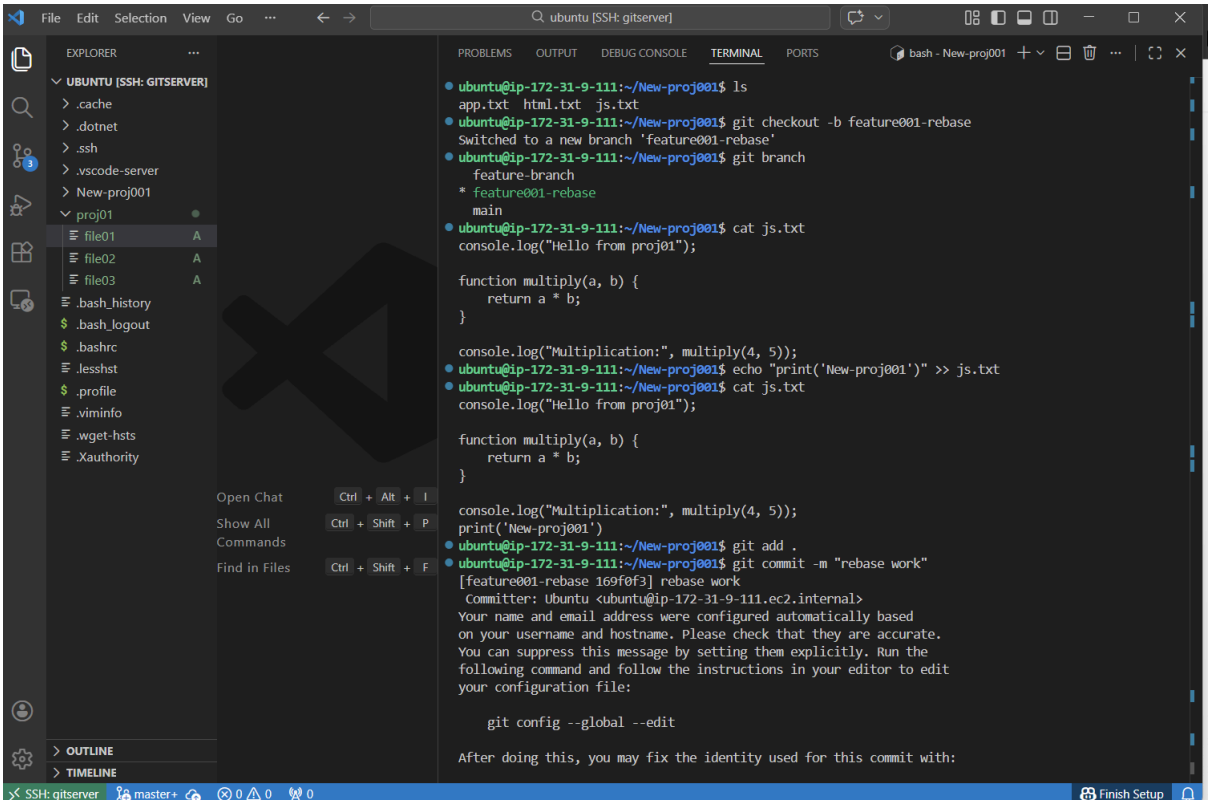
File Edit Selection View Go
ubuntu [SSH: gitserver]
EXPLORER
UBUNTU [SSH: GITSERVER]
.cache
.dotnet
.ssh
.vscode-server
New-proj001
proj01
file01 A
file02 A
file03 A
.bash_history
.bash_logout
.bashrc
.lesshst
.profile
.viminfo
.wget-hsts
.Xauthority
Open Chat Ctrl + Alt + I
Show All Commands Ctrl + Shift + P
Find in Files Ctrl + Shift + F
OUTLINE
TIMELINE
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
bash - New-proj001
ubuntu@ip-172-31-9-111:~/New-proj001$ ls
app.txt html.txt js.txt
ubuntu@ip-172-31-9-111:~/New-proj001$ git checkout -b feature001-rebase
Switched to a new branch 'feature001-rebase'
ubuntu@ip-172-31-9-111:~/New-proj001$ git branch
feature-branch
* feature001-rebase
main
ubuntu@ip-172-31-9-111:~/New-proj001$ cat js.txt
console.log("Hello from proj01");
function multiply(a, b) {
return a * b;
}
console.log("Multiplication:", multiply(4, 5));
ubuntu@ip-172-31-9-111:~/New-proj001$ echo "print('New-proj001')" >> js.txt
ubuntu@ip-172-31-9-111:~/New-proj001$ cat js.txt
console.log("Hello from proj01");
function multiply(a, b) {
return a * b;
}
console.log("Multiplication:", multiply(4, 5));
print('New-proj001')
ubuntu@ip-172-31-9-111:~/New-proj001$ git add .
ubuntu@ip-172-31-9-111:~/New-proj001$ git commit -m "rebase work"
[feature001-rebase 169f0f3] rebase work
Committer: Ubuntu <ubuntu@ip-172-31-9-111.ec2.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:
git config --global --edit
After doing this, you may fix the identity used for this commit with:
SSH: gitserver
master+
Finish Setup

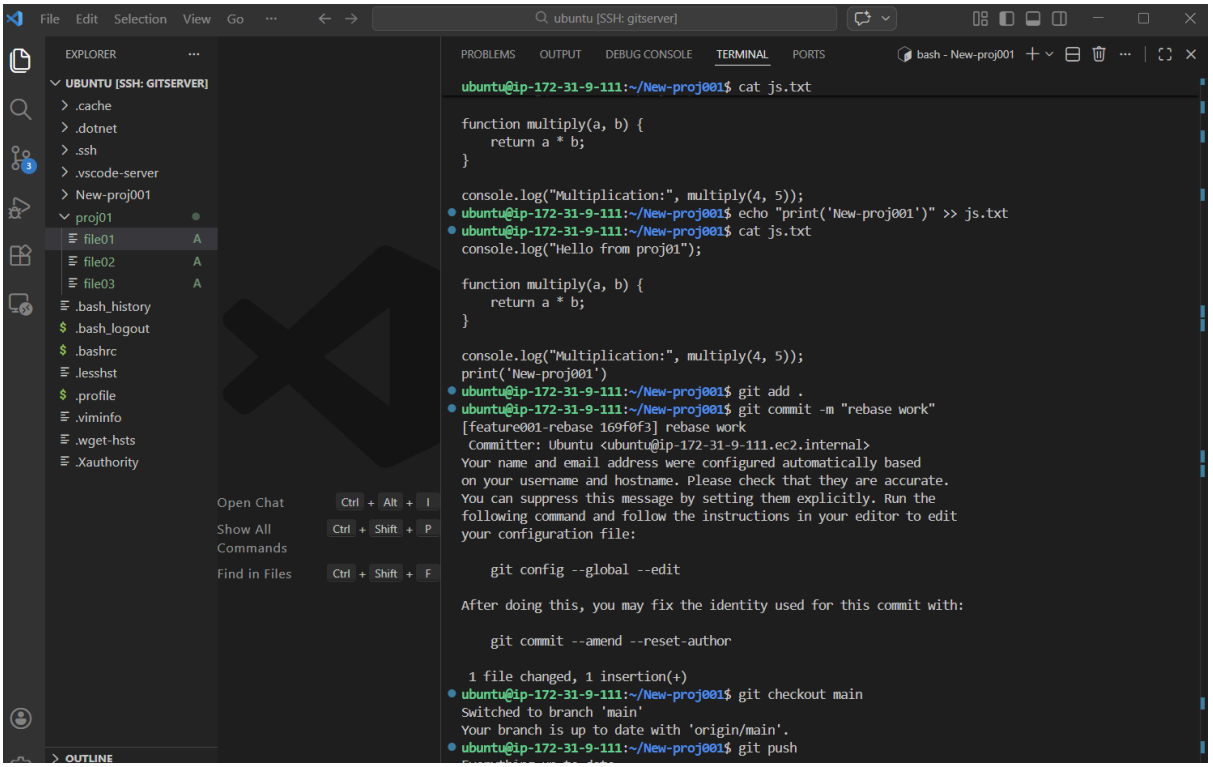
File Edit Selection View Go
ubuntu [SSH: gitserver]
EXPLORER
UBUNTU [SSH: GITSERVER]
.cache
.dotnet
.ssh
.vscode-server
New-proj001
proj01
file01 A
file02 A
file03 A
.bash_history
.bash_logout
.bashrc
.lesshst
.profile
.viminfo
.wget-hsts
.Xauthority
Open Chat Ctrl + Alt + I
Show All Commands Ctrl + Shift + P
Find in Files Ctrl + Shift + F
OUTLINE
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
bash - New-proj001
ubuntu@ip-172-31-9-111:~/New-proj001$ cat js.txt
function multiply(a, b) {
return a * b;
}
console.log("Multiplication:", multiply(4, 5));
ubuntu@ip-172-31-9-111:~/New-proj001$ echo "print('New-proj001')" >> js.txt
ubuntu@ip-172-31-9-111:~/New-proj001$ cat js.txt
console.log("Hello from proj01");
function multiply(a, b) {
return a * b;
}
console.log("Multiplication:", multiply(4, 5));
print('New-proj001')
ubuntu@ip-172-31-9-111:~/New-proj001$ git add .
ubuntu@ip-172-31-9-111:~/New-proj001$ git commit -m "rebase work"
[feature001-rebase 169f0f3] rebase work
Committer: Ubuntu <ubuntu@ip-172-31-9-111.ec2.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:
git config --global --edit
After doing this, you may fix the identity used for this commit with:
git commit --amend --reset-author
1 file changed, 1 insertion(+)
ubuntu@ip-172-31-9-111:~/New-proj001$ git checkout main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
ubuntu@ip-172-31-9-111:~/New-proj001$ git push

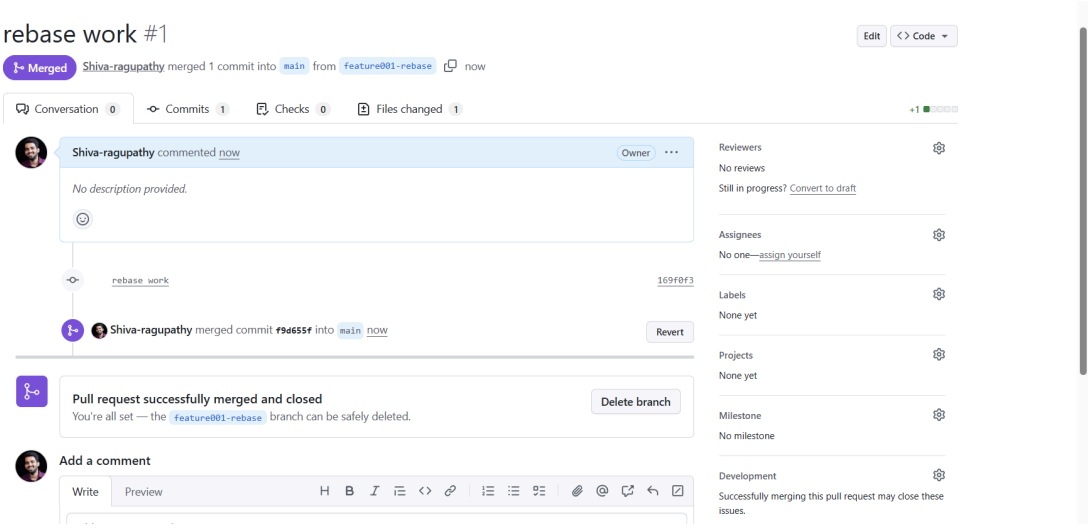
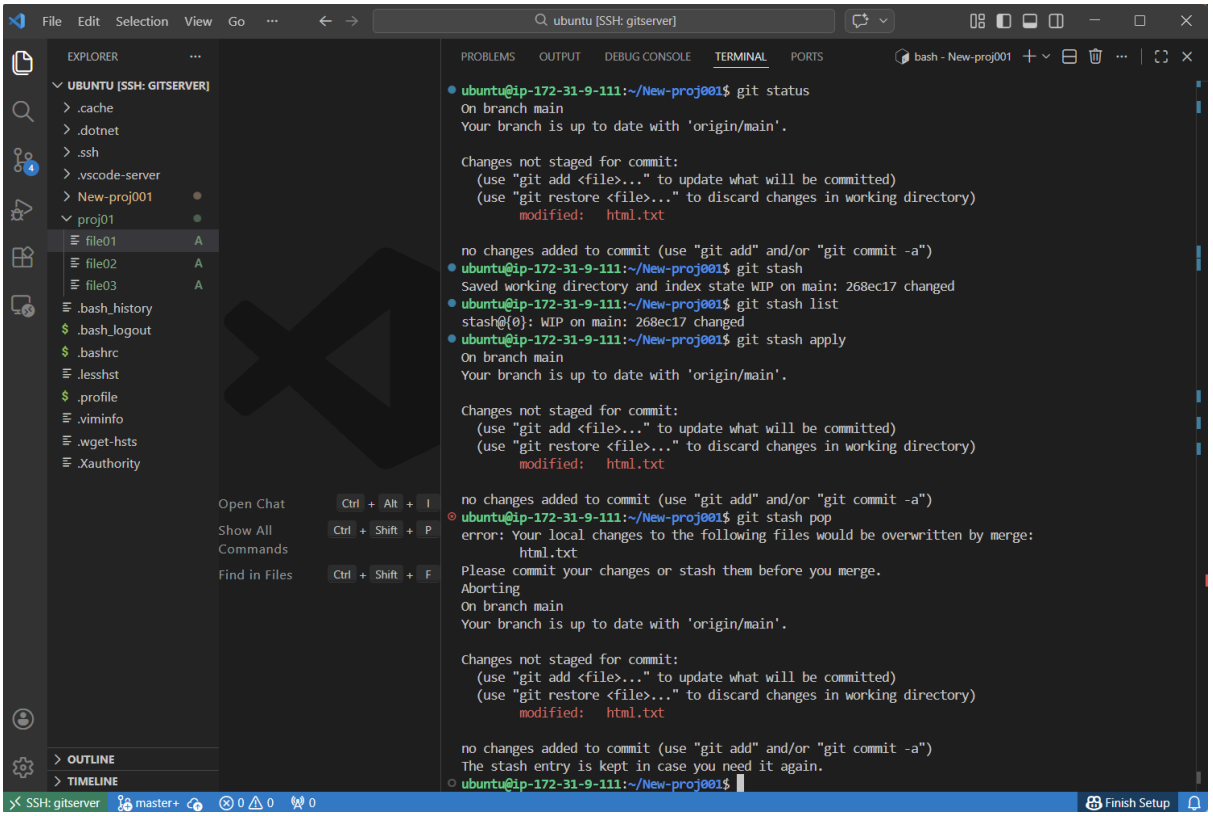
Stash commands: