



Mysql Database tutorials or JDBC

Step 1: Open Mysql database (Mysql command line client)

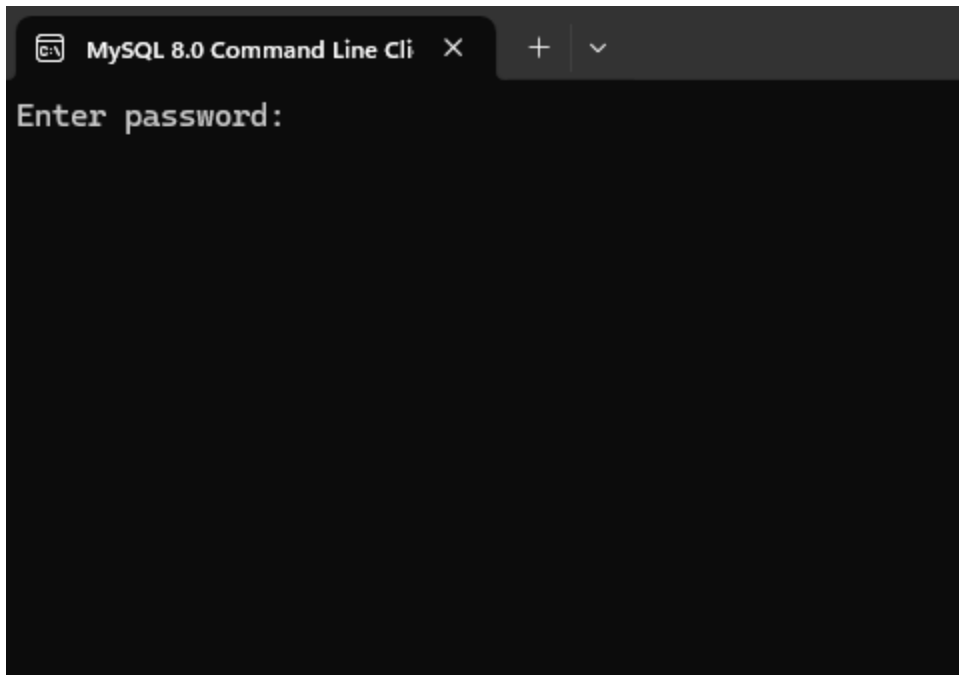


It asks for password, enter password of Mysql database (default password is root)

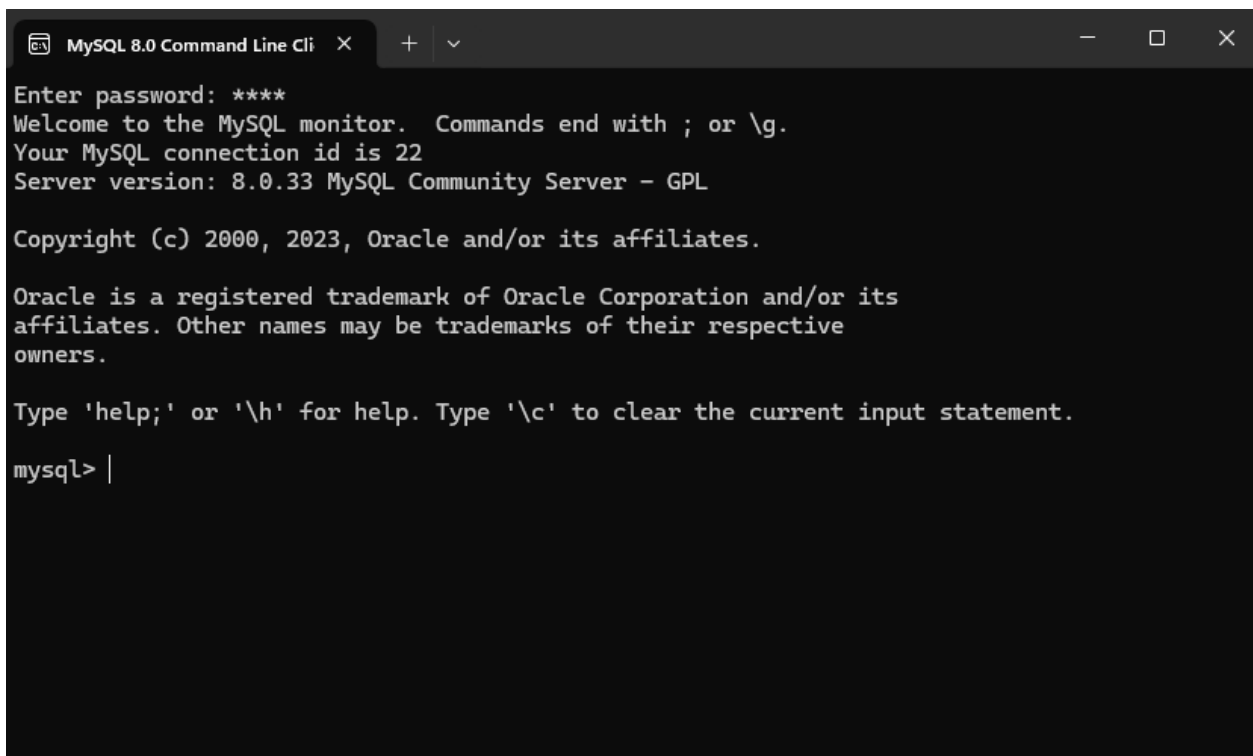

Step 2: If you want to see how many databases are there then write command

Show databases

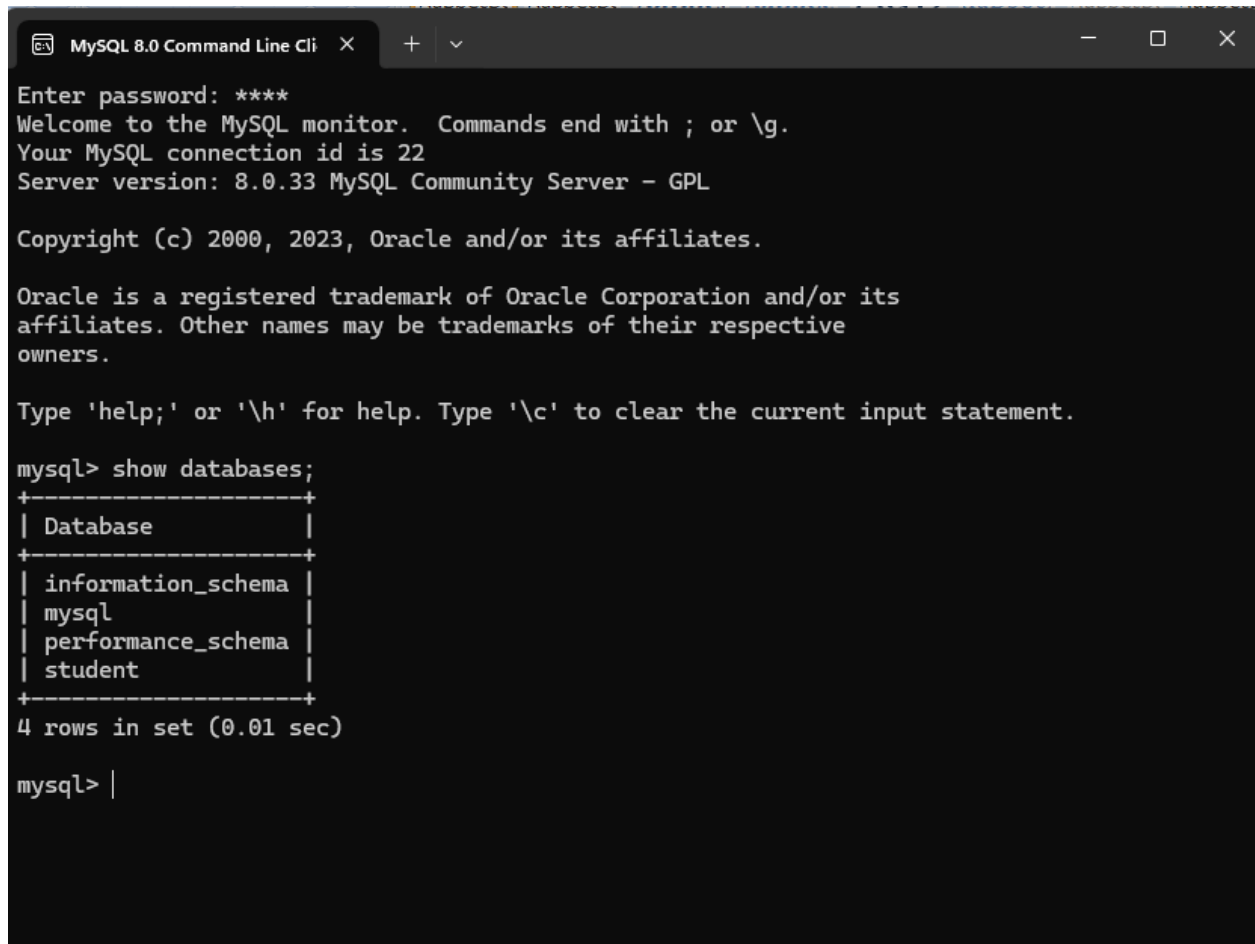

```
MySQL 8.0 Command Line Cli x + v - □ x
Enter password: ****
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 22
Server version: 8.0.33 MySQL Community Server - GPL

Copyright (c) 2000, 2023, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.


Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| student |
+-----+
4 rows in set (0.01 sec)

mysql> |
```

Step 3: If you want to create your own database then you have to write

Command – create database Parul

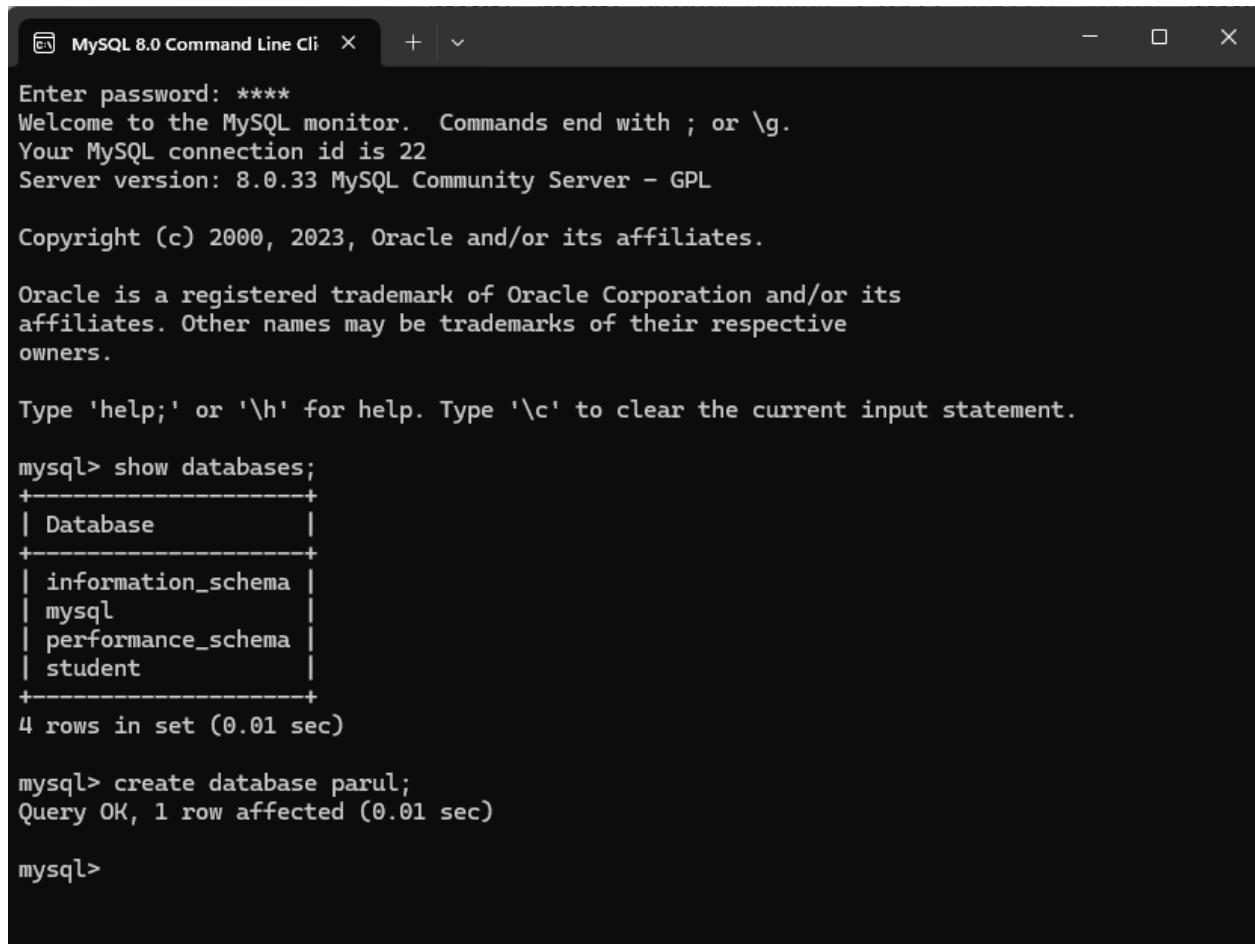

```
MySQL 8.0 Command Line Cli x + v - □ x
Enter password: ****
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 22
Server version: 8.0.33 MySQL Community Server - GPL

Copyright (c) 2000, 2023, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| student |
+-----+
4 rows in set (0.01 sec)

mysql> create database parul;
Query OK, 1 row affected (0.01 sec)

mysql>
```

Again write command show databases for checking that parul database is created or not

```
MySQL 8.0 Command Line Cli x + v - □ x

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| student |
+-----+
4 rows in set (0.01 sec)


mysql> create database parul;
Query OK, 1 row affected (0.01 sec)

mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| parul |
| performance_schema |
| student |
+-----+
5 rows in set (0.00 sec)

mysql>
```

Step 4: If you want to use your created database then write command

Use parul

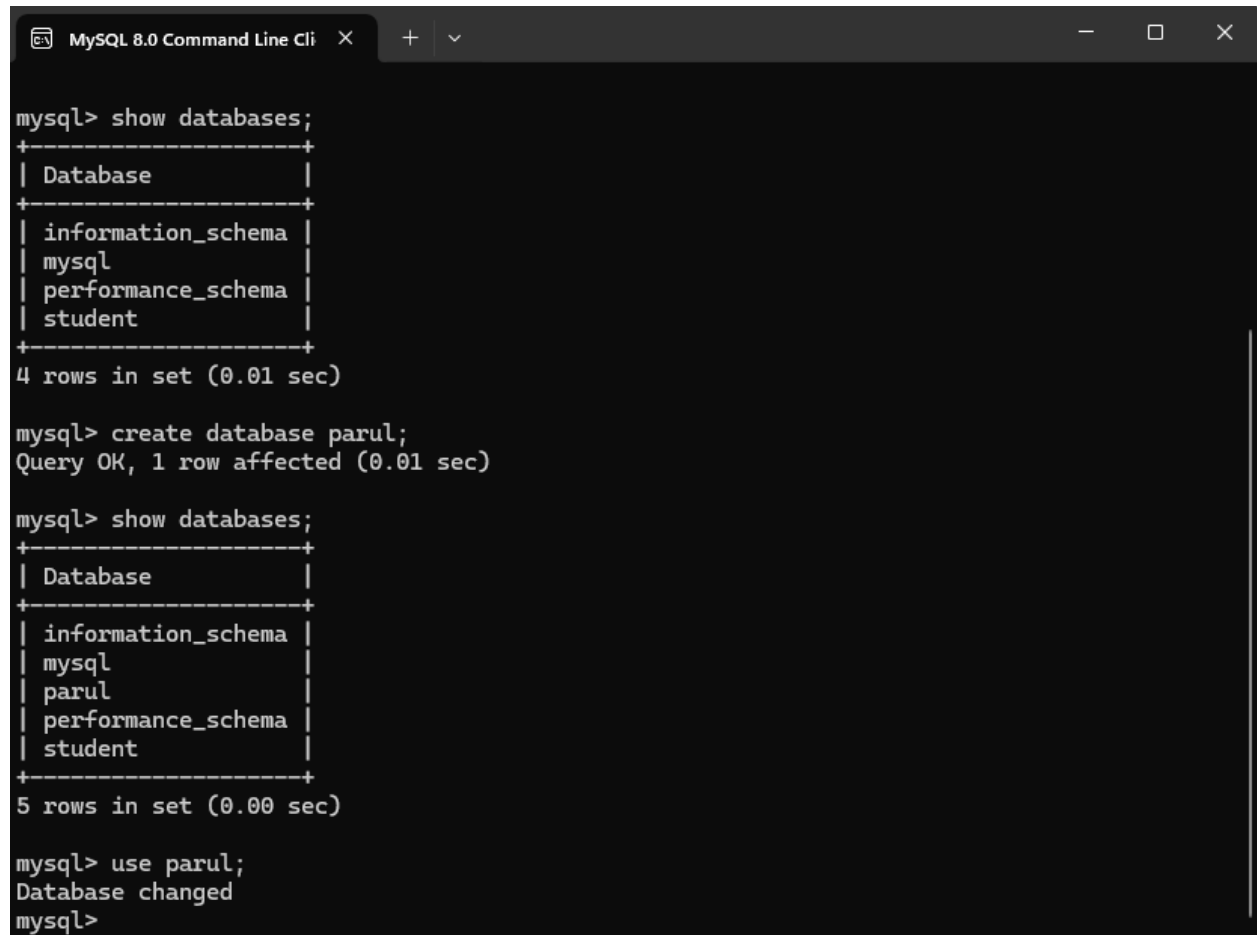

```
mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| student |
+-----+
4 rows in set (0.01 sec)

mysql> create database parul;
Query OK, 1 row affected (0.01 sec)


mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| parul |
| performance_schema |
| student |
+-----+
5 rows in set (0.00 sec)

mysql> use parul;
Database changed
mysql>
```

Step 5: If you want to create table on that database then write query

To create table

create table movies(mno int, mname varchar(25), hero varchar(25), heroine varchar(25));

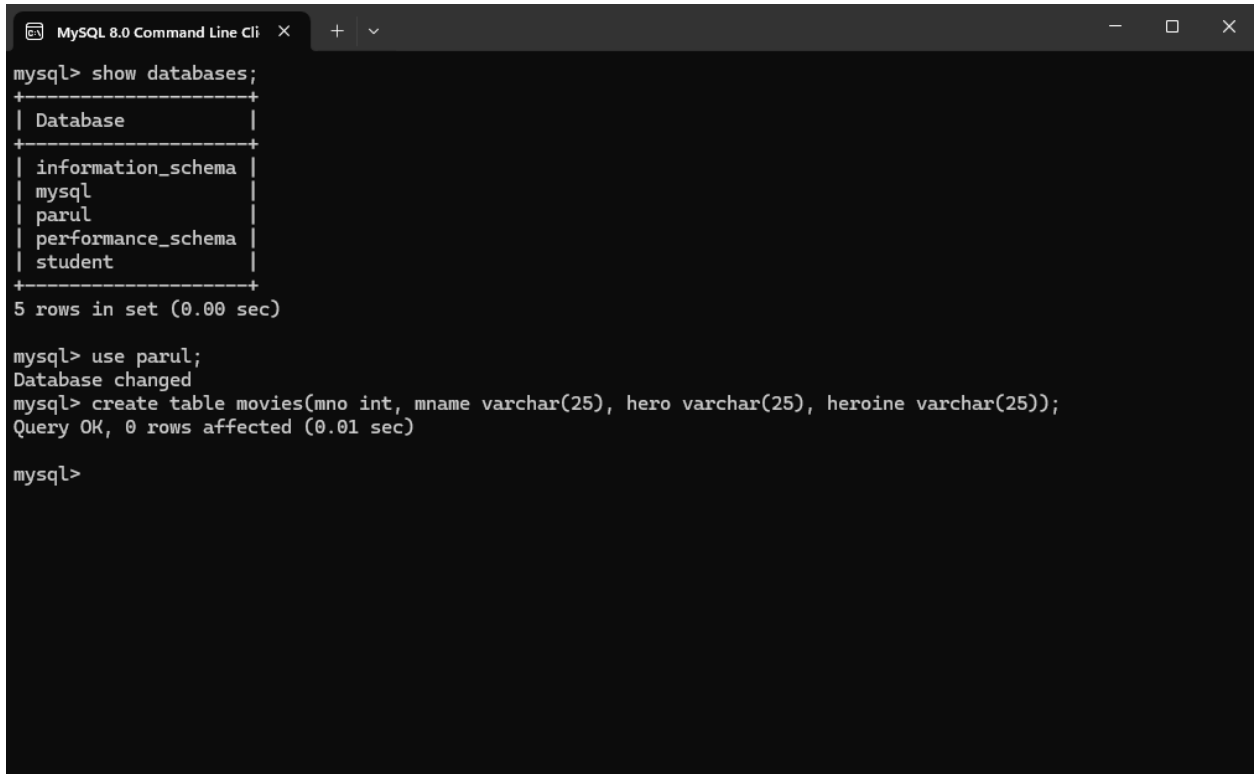A screenshot of the MySQL 8.0 Command Line Client window. The window title is "MySQL 8.0 Command Line Cli". The terminal shows the following commands and output:

```
mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql       |
| parul       |
| performance_schema |
| student     |
+-----+
5 rows in set (0.00 sec)

mysql> use parul;
Database changed
mysql> create table movies(mno int, mname varchar(25), hero varchar(25), heroine varchar(25));
Query OK, 0 rows affected (0.01 sec)


mysql>
```

Step 6: To insert data to movies table

insert into movies values(1,'bahubali','prabhas','anushka');

insert into movies values(2,'rayees','shahrukh','deepika');

insert into movies values(3,'sultan','salman','anushka');

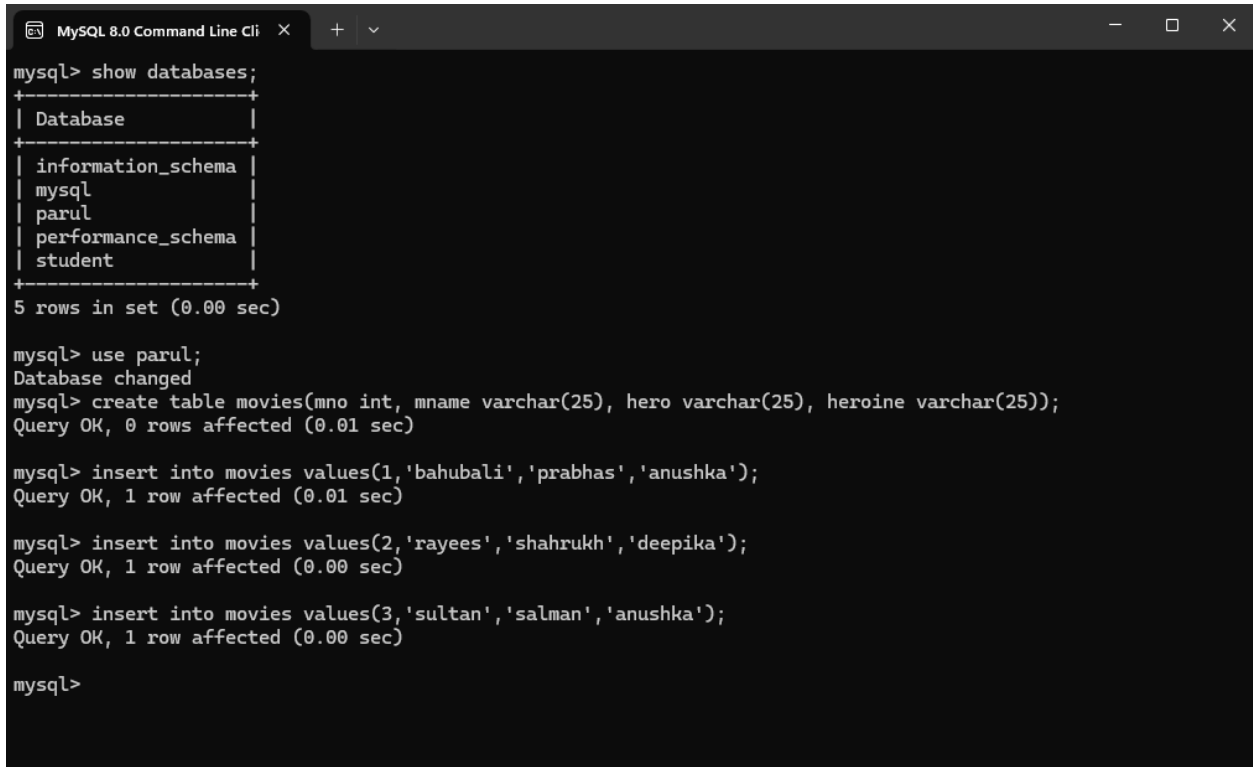A screenshot of the MySQL 8.0 Command Line Client window. The window title is "MySQL 8.0 Command Line Cli". The terminal shows the following commands and output:

```
mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| parul |
| performance_schema |
| student |
+-----+
5 rows in set (0.00 sec)

mysql> use parul;
Database changed
mysql> create table movies(mno int, mname varchar(25), hero varchar(25), heroine varchar(25));
Query OK, 0 rows affected (0.01 sec)

mysql> insert into movies values(1,'bahubali','prabhas','anushka');
Query OK, 1 row affected (0.01 sec)

mysql> insert into movies values(2,'rayees','shahrukh','deepika');
Query OK, 1 row affected (0.00 sec)

mysql> insert into movies values(3,'sultan','salman','anushka');
Query OK, 1 row affected (0.00 sec)

mysql>
```

Step 7: To select data

Select * from movies;

```
MySQL 8.0 Command Line Client
| performance_schema |
| student            |
+-----+
5 rows in set (0.00 sec)

mysql> use parul;
Database changed
mysql> create table movies(mno int, mname varchar(25), hero varchar(25), heroine varchar(25));
Query OK, 0 rows affected (0.01 sec)

mysql> insert into movies values(1,'bahubali','prabhas','anushka');
Query OK, 1 row affected (0.01 sec)

mysql> insert into movies values(2,'rayees','shahrukh','deepika');
Query OK, 1 row affected (0.00 sec)

mysql> insert into movies values(3,'sultan','salman','anushka');
Query OK, 1 row affected (0.00 sec)

mysql> Select * from movies;
+----+-----+-----+-----+
| mno | mname | hero  | heroine |
+----+-----+-----+-----+
| 1   | bahubali | prabhas | anushka |
| 2   | rayees  | shahrukh | deepika |
| 3   | sultan  | salman  | anushka |
+----+-----+-----+-----+
3 rows in set (0.00 sec)

mysql>
```


Step 8: To update data

update movies set heroine='Tamannah' where mno=1;

```
MySQL 8.0 Command Line Cli x + v
mysql> use parul;
Database changed
mysql> create table movies(mno int, mname varchar(25), hero varchar(25), heroine varchar(25));
Query OK, 0 rows affected (0.01 sec)

mysql> insert into movies values(1,'bahubali','prabhas','anushka');
Query OK, 1 row affected (0.01 sec)

mysql> insert into movies values(2,'rayees','shahrukh','deepika');
Query OK, 1 row affected (0.00 sec)

mysql> insert into movies values(3,'sultan','salman','anushka');
Query OK, 1 row affected (0.00 sec)

mysql> Select * from movies;
+-----+-----+-----+-----+
| mno | mname | hero  | heroine |
+-----+-----+-----+-----+
| 1   | bahubali | prabhas | anushka |
| 2   | rayees  | shahrukh | deepika |
| 3   | sultan  | salman  | anushka |
+-----+-----+-----+-----+
3 rows in set (0.00 sec)

mysql> update movies set heroine='Tamannah' where mno=1;
Query OK, 1 row affected (0.01 sec)
Rows matched: 1  Changed: 1  Warnings: 0

mysql>
```

Again check data updated or not

```
MySQL 8.0 Command Line Cli x + v
Query OK, 1 row affected (0.00 sec)

mysql> insert into movies values(3,'sultan','salman','anushka');
Query OK, 1 row affected (0.00 sec)

mysql> Select * from movies;
+-----+-----+-----+-----+
| mno | mname | hero  | heroine |
+-----+-----+-----+-----+
| 1   | bahubali | prabhas | anushka |
| 2   | rayees  | shahrukh | deepika |
| 3   | sultan  | salman  | anushka |
+-----+-----+-----+-----+
3 rows in set (0.00 sec)

mysql> update movies set heroine='Tamannah' where mno=1;
Query OK, 1 row affected (0.01 sec)
Rows matched: 1 Changed: 1 Warnings: 0

mysql> select * from movies;
+-----+-----+-----+-----+
| mno | mname | hero  | heroine |
+-----+-----+-----+-----+
| 1   | bahubali | prabhas | Tamannah |
| 2   | rayees  | shahrukh | deepika |
| 3   | sultan  | salman  | anushka |
+-----+-----+-----+-----+
3 rows in set (0.00 sec)

mysql>
```

Step 9: To delete a row

delete from movies where mno=3;

```
MySQL 8.0 Command Line Cli X + v
Query OK, 1 row affected (0.00 sec)

mysql> Select * from movies;
+-----+-----+-----+-----+
| mno | mname | hero  | heroine |
+-----+-----+-----+-----+
| 1   | bahubali | prabhas | anushka |
| 2   | rayees  | shahrukh | deepika |
| 3   | sultan  | salman  | anushka |
+-----+-----+-----+-----+
3 rows in set (0.00 sec)

mysql> update movies set heroine='Tamannah' where mno=1;
Query OK, 1 row affected (0.01 sec)
Rows matched: 1 Changed: 1 Warnings: 0

mysql> select * from movies;
+-----+-----+-----+-----+
| mno | mname | hero  | heroine |
+-----+-----+-----+-----+
| 1   | bahubali | prabhas | Tamannah |
| 2   | rayees  | shahrukh | deepika |
| 3   | sultan  | salman  | anushka |
+-----+-----+-----+-----+
3 rows in set (0.00 sec)

mysql> delete from movies where mno=3;
Query OK, 1 row affected (0.00 sec)

mysql>
```

Again check data is deleted or not

```
MySQL 8.0 Command Line Cli x + v
+-----+-----+-----+
3 rows in set (0.00 sec)

mysql> update movies set heroine='Tamannah' where mno=1;
Query OK, 1 row affected (0.01 sec)
Rows matched: 1 Changed: 1 Warnings: 0

mysql> select * from movies;
+-----+-----+-----+
| mno | mname | hero | heroine |
+-----+-----+-----+
| 1 | bahubali | prabhas | Tamannah |
| 2 | rayees | shahrukh | deepika |
| 3 | sultan | salman | anushka |
+-----+-----+-----+
3 rows in set (0.00 sec)

mysql> delete from movies where mno=3;
Query OK, 1 row affected (0.00 sec)

mysql> select * from movies;
+-----+-----+-----+
| mno | mname | hero | heroine |
+-----+-----+-----+
| 1 | bahubali | prabhas | Tamannah |
| 2 | rayees | shahrukh | deepika |
+-----+-----+-----+
2 rows in set (0.00 sec)


mysql>
```

Note: Similarly if you created database that is not use

Example – create database abc;

If it is not used, and want to delete that database so need to write query

Drop database abc;

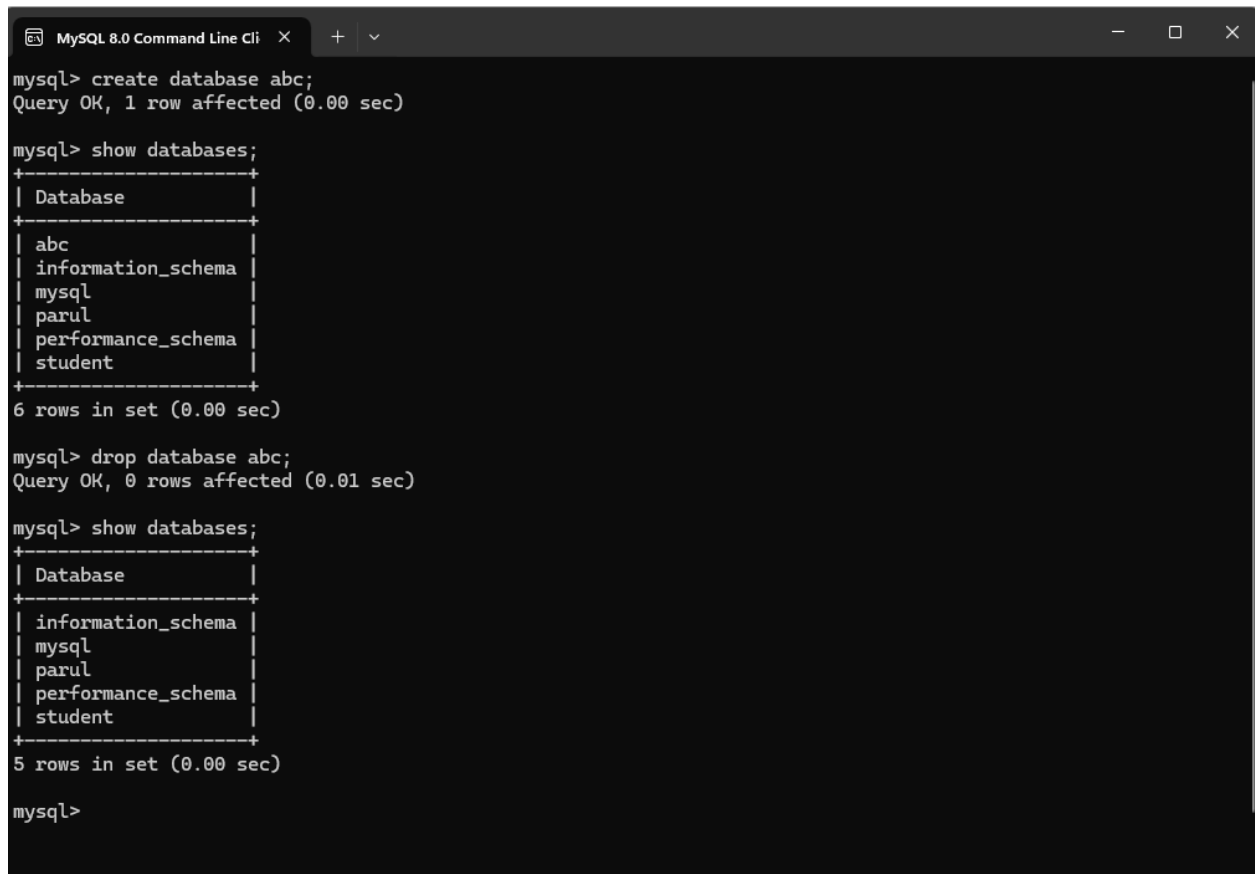

```
mysql> create database abc;
Query OK, 1 row affected (0.00 sec)

mysql> show databases;
+-----+
| Database |
+-----+
| abc      |
| information_schema |
| mysql    |
| parul    |
| performance_schema |
| student  |
+-----+
6 rows in set (0.00 sec)

mysql> drop database abc;
Query OK, 0 rows affected (0.01 sec)

mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql            |
| parul            |
| performance_schema |
| student          |
+-----+
5 rows in set (0.00 sec)

mysql>
```

If you want to clear screen then write query

System cls; (it clear entire screen)

And want to delete any table than command will be

Drop table tablename; (here in place of tablename write table which you want to delete)