
OneClick QA Wireframes

1. Complete product navigation



2. Global application shell
Every authenticated page should use this basic structure.

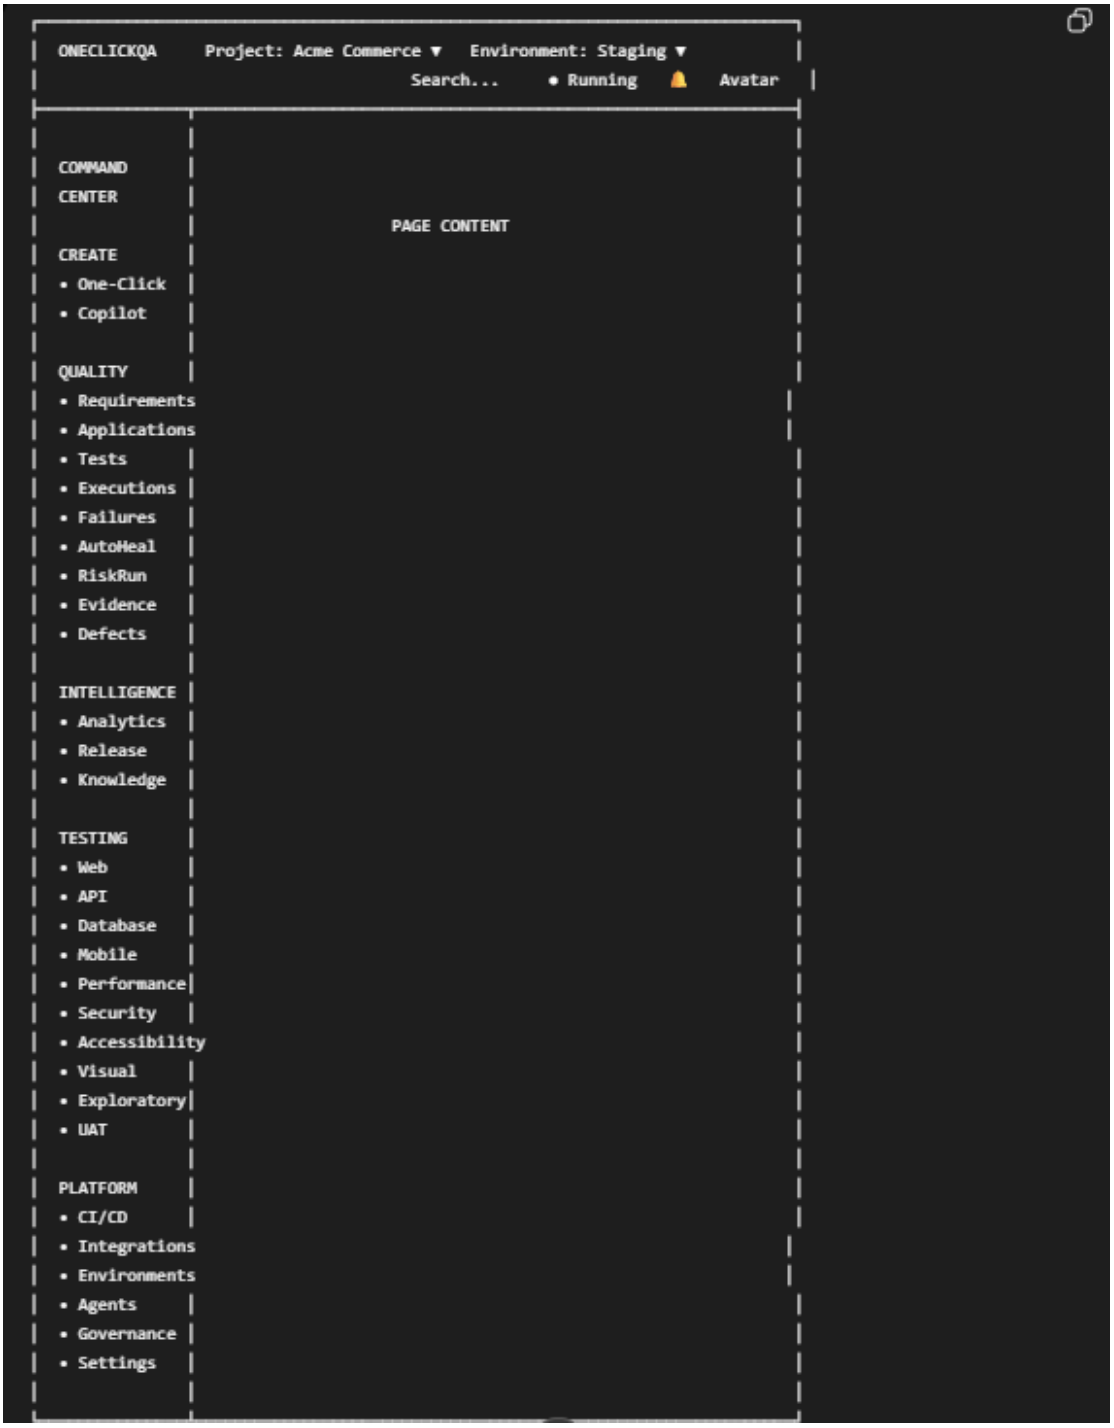


3. Command Center wireframe




4. One-Click Test wireframe




After START TEST

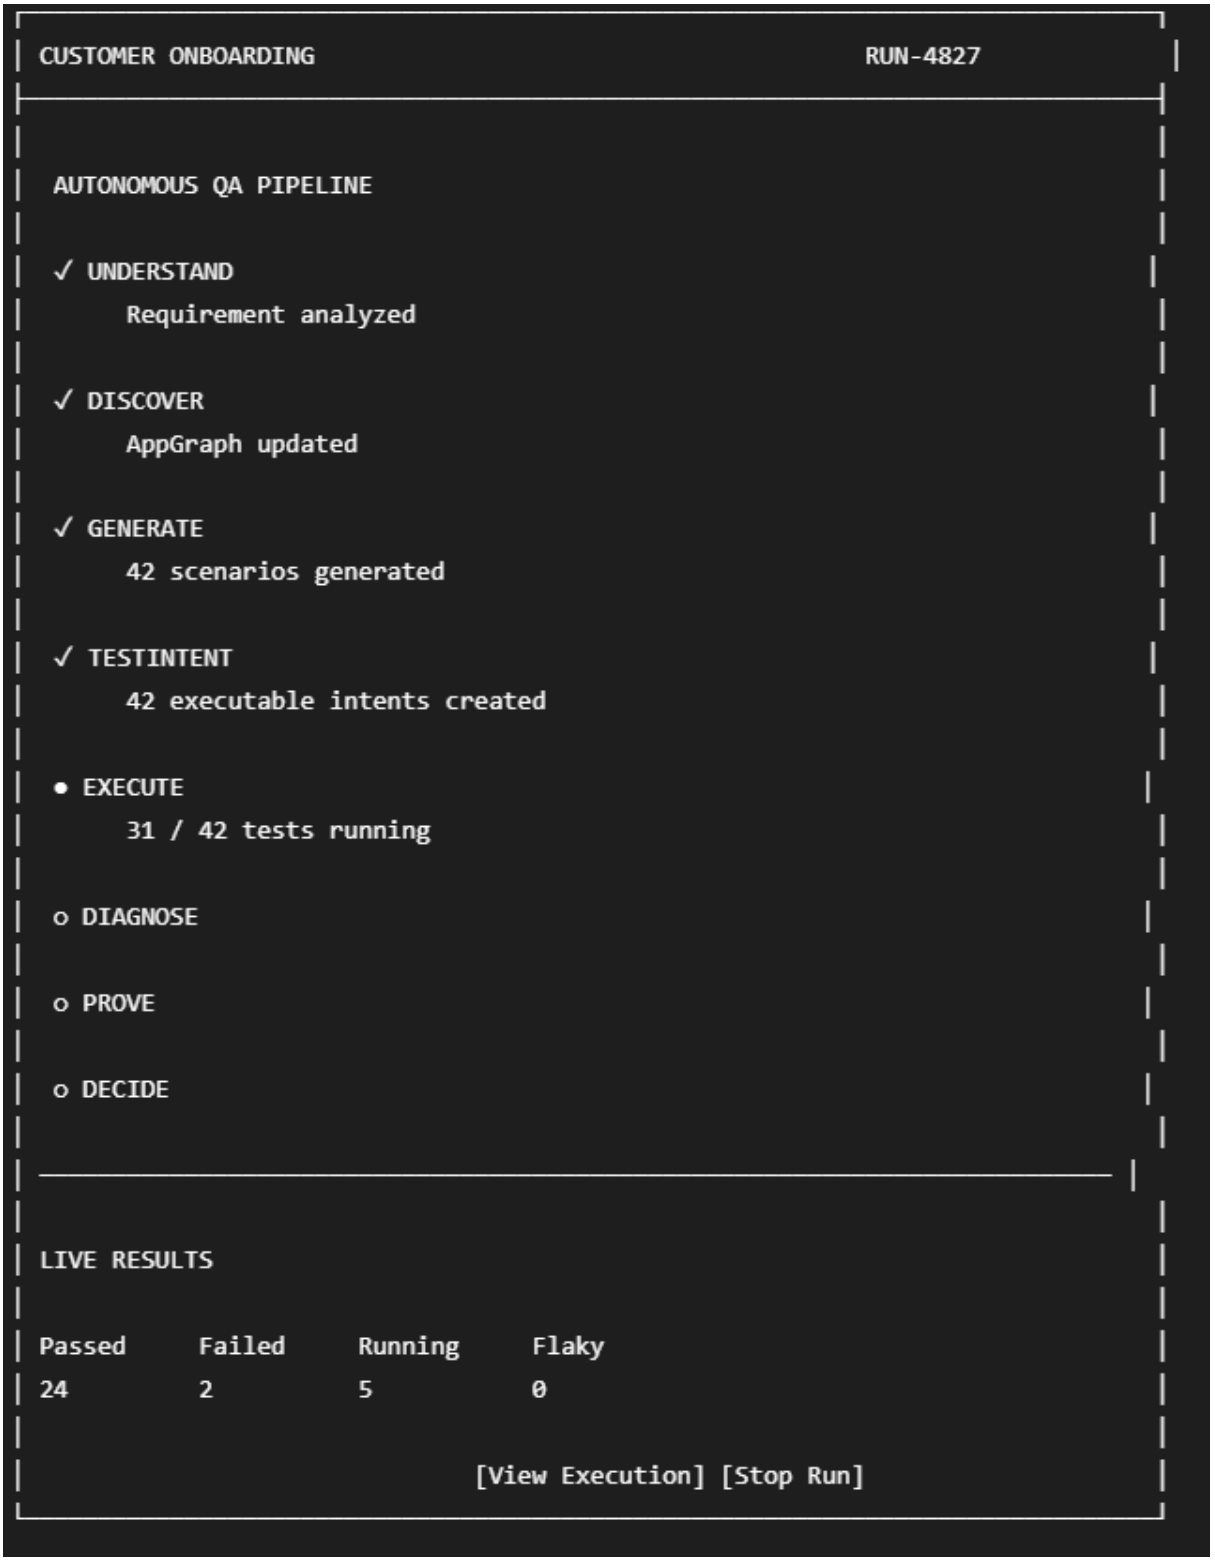


5. Test Explorer wireframe

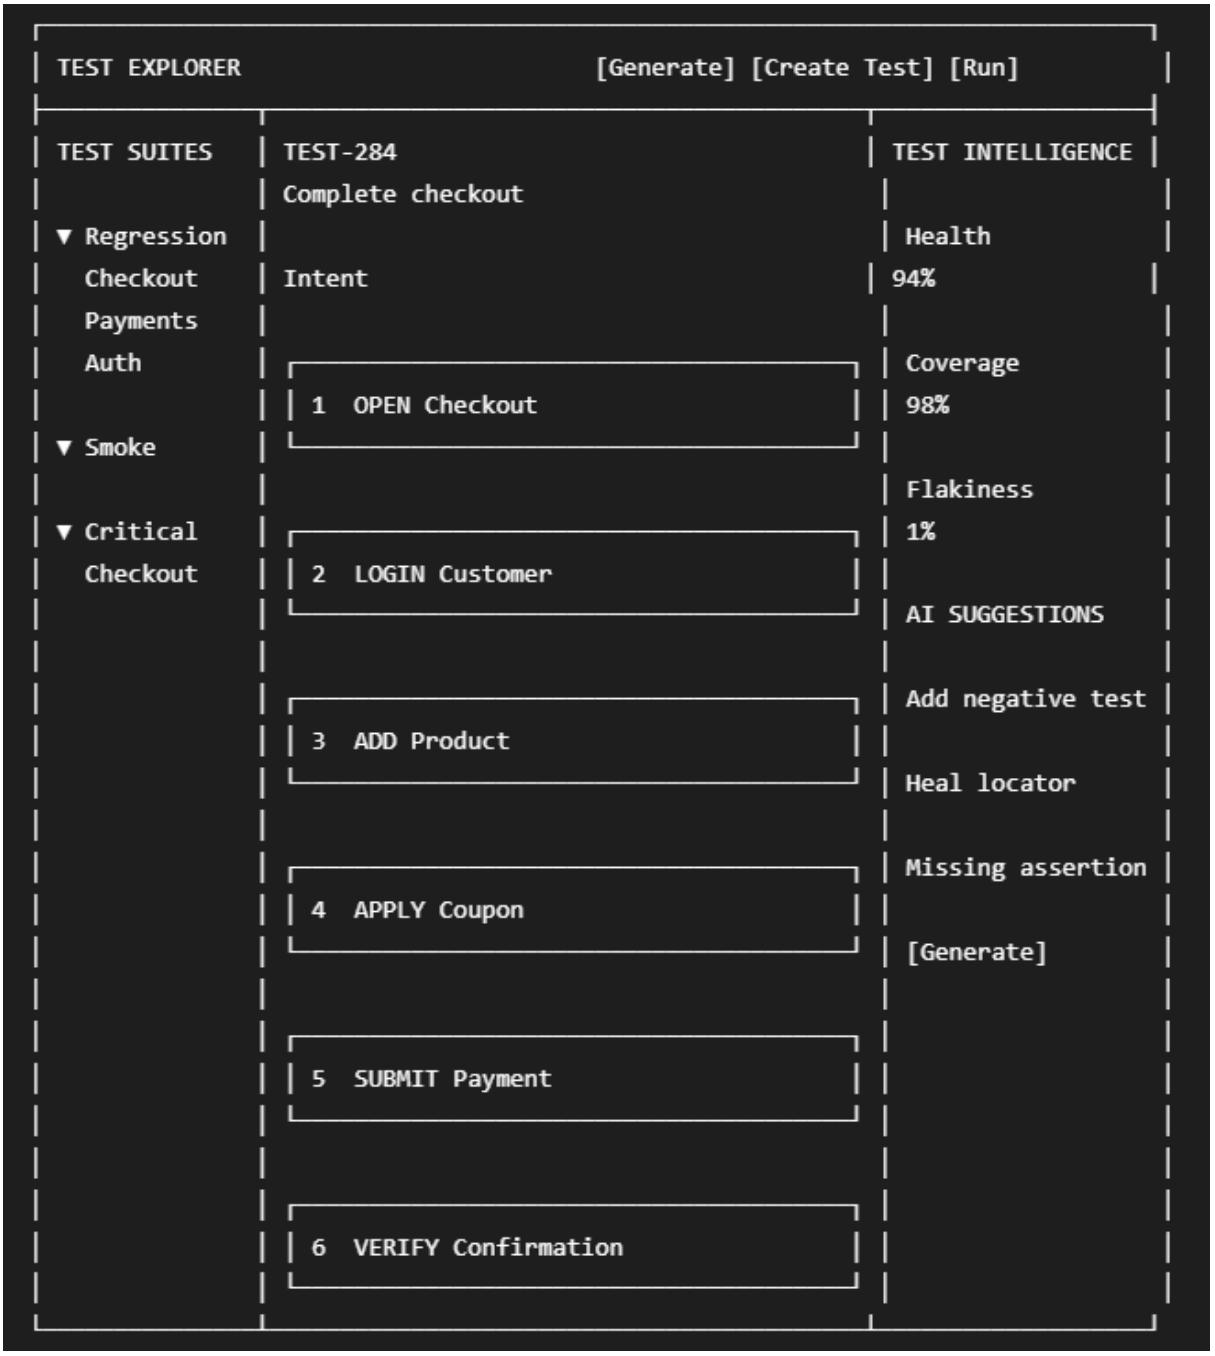


6. FailureIQ wireframe

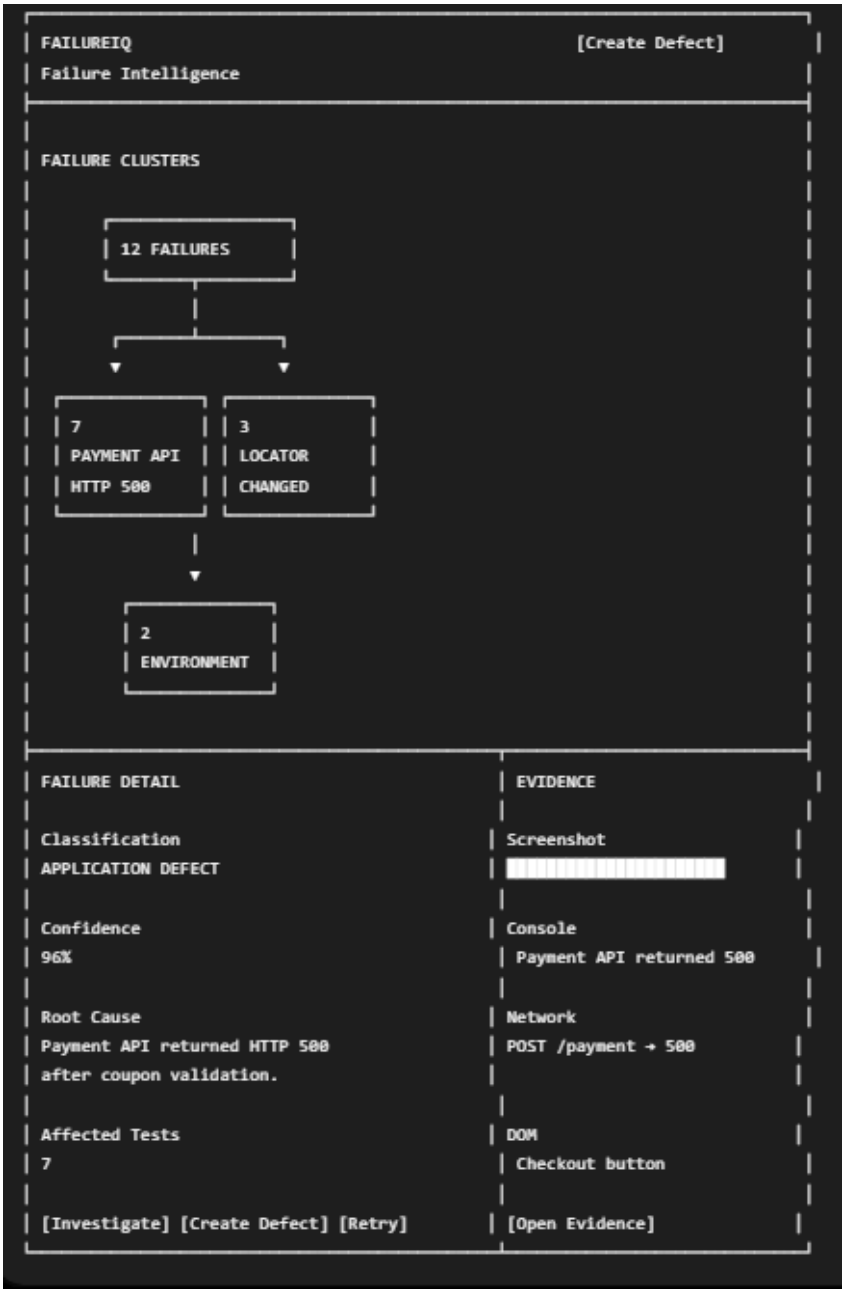


7. AutoHeal wireframe

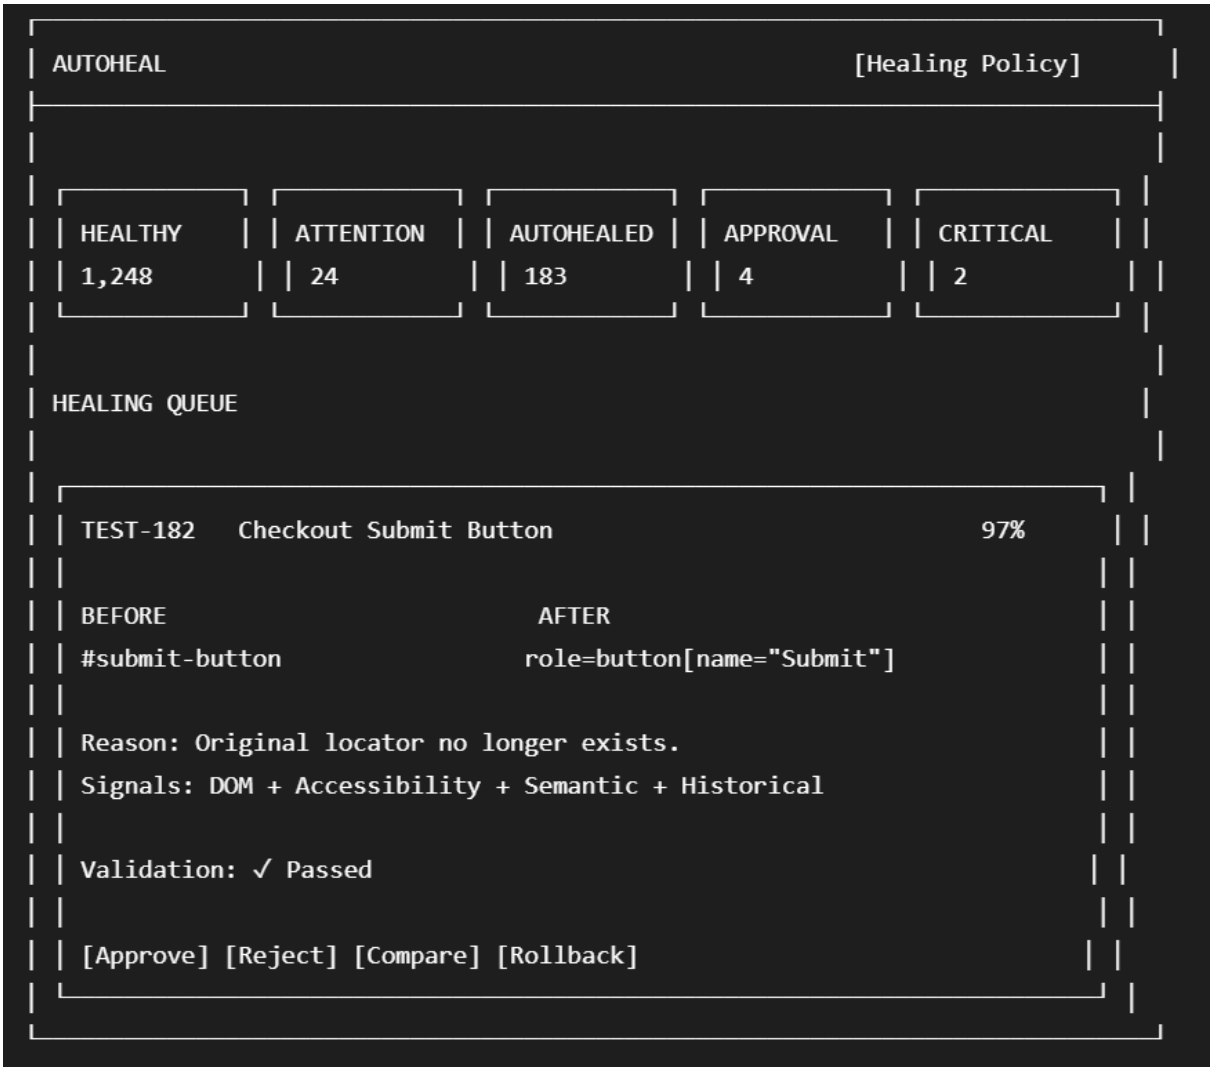


8. RiskRun wireframe

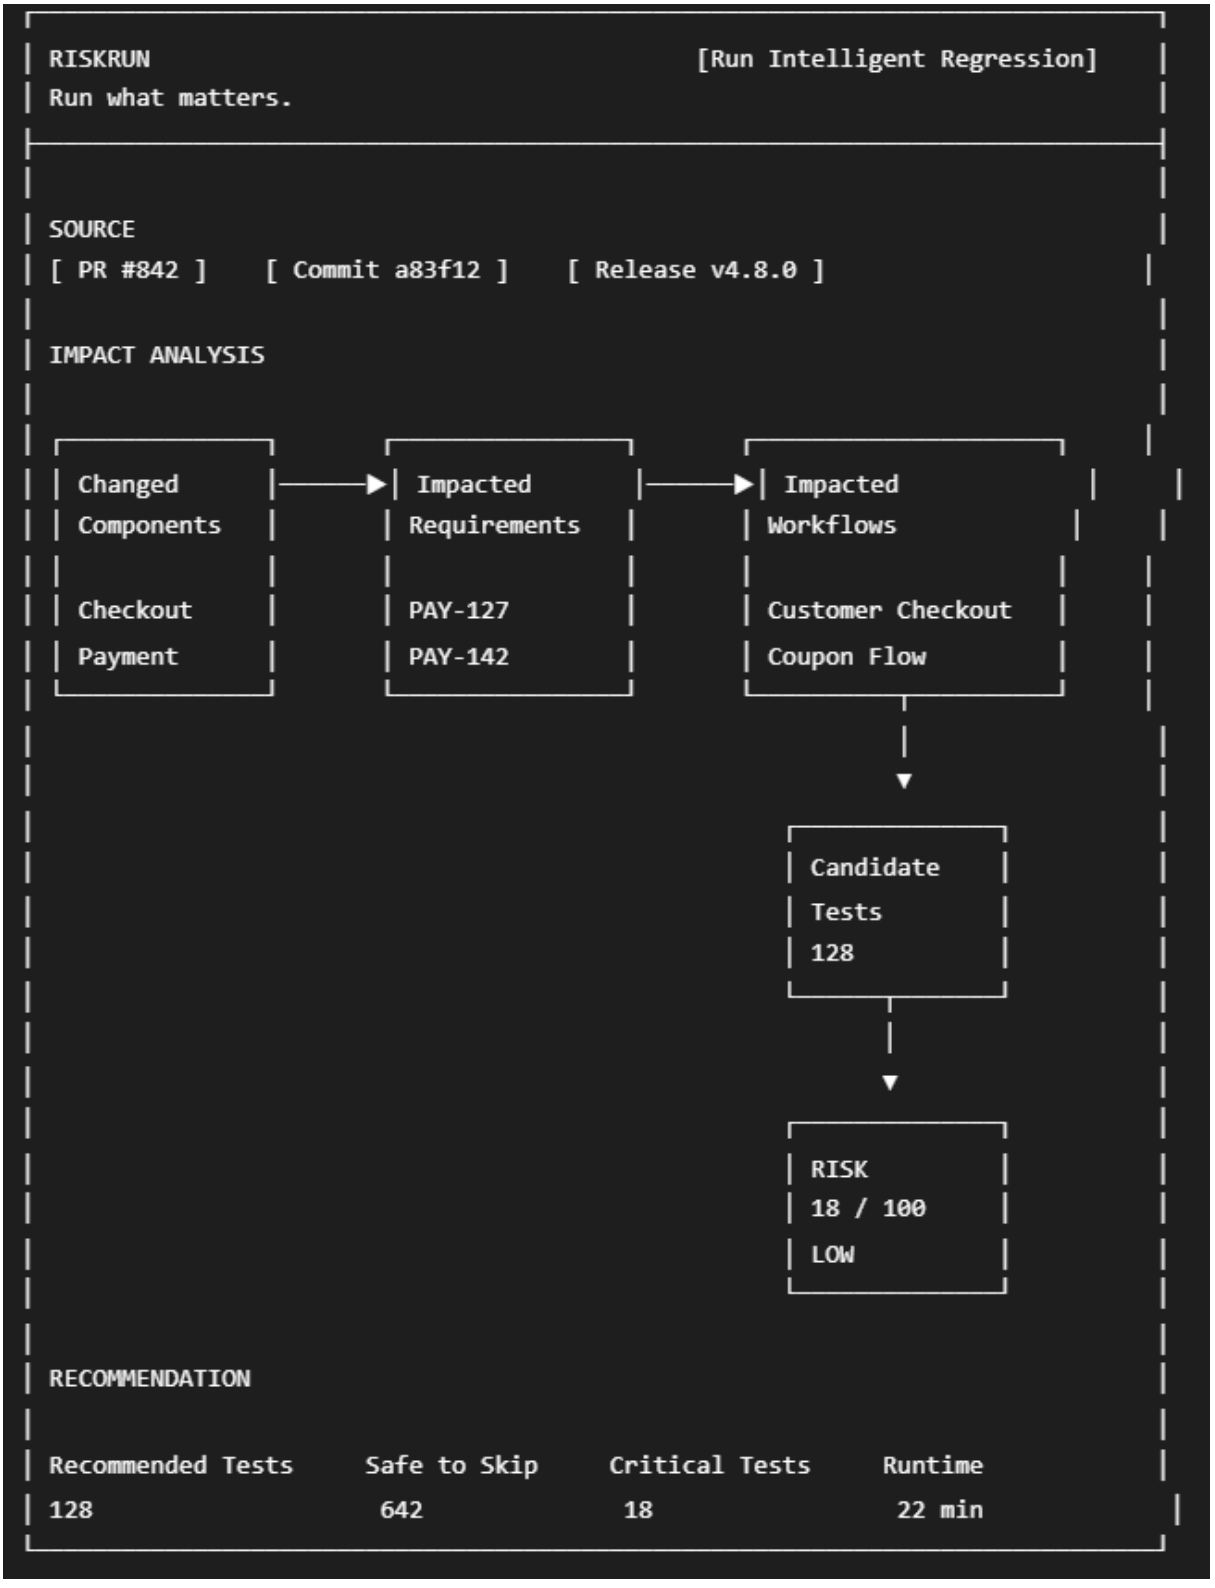


9. EvidenceGraph wireframe

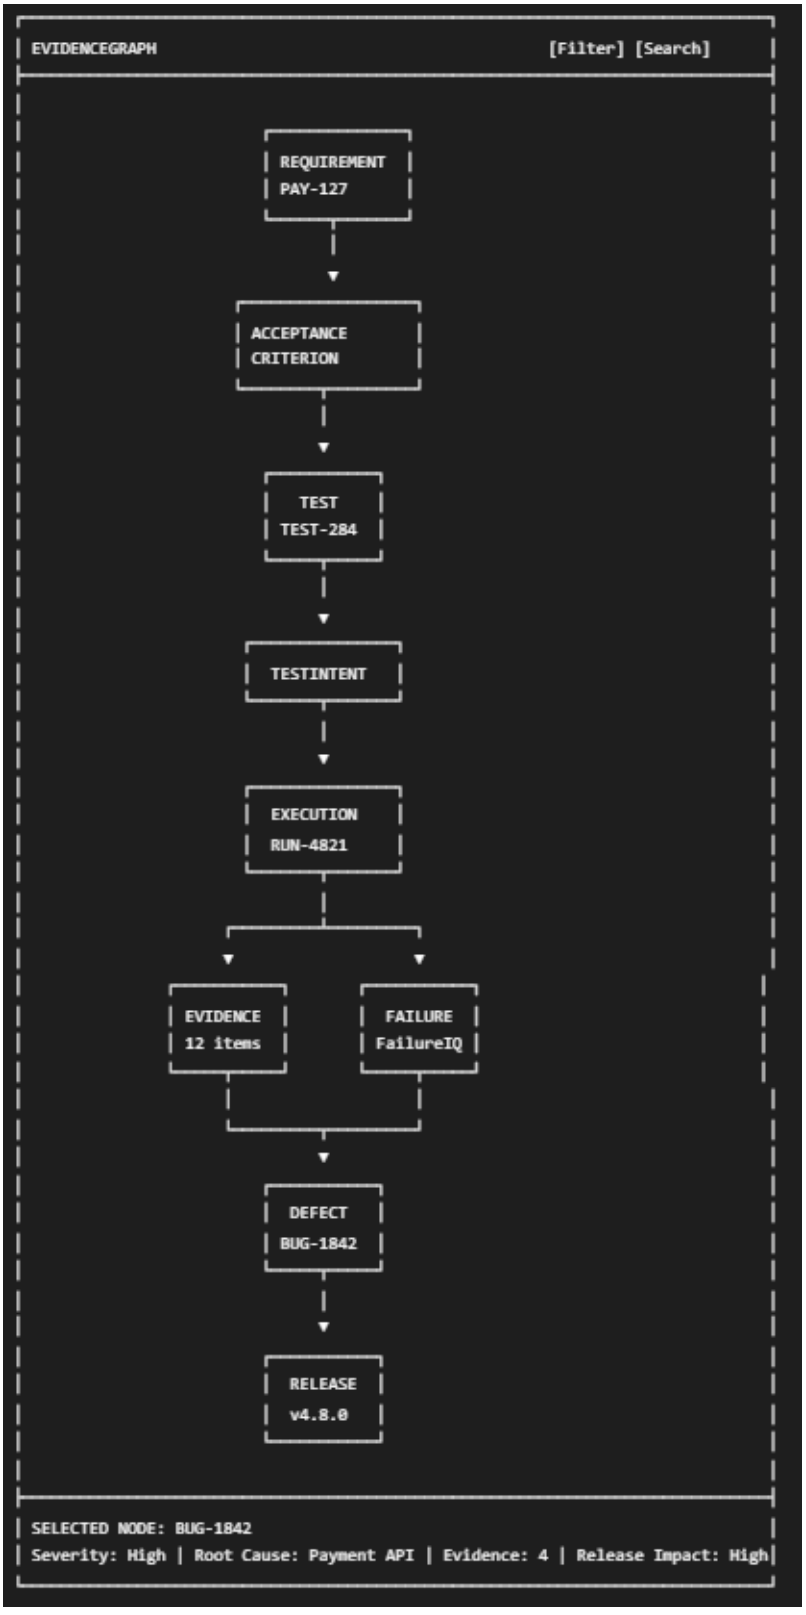

10. Complete requirement-to-release flow

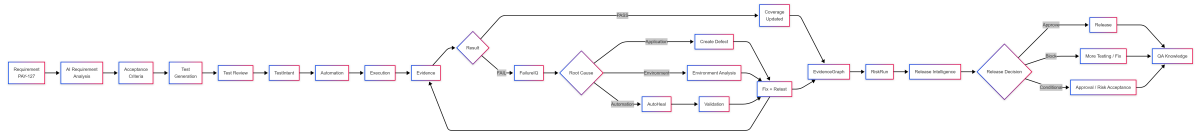

11. Defect lifecycle wireframe

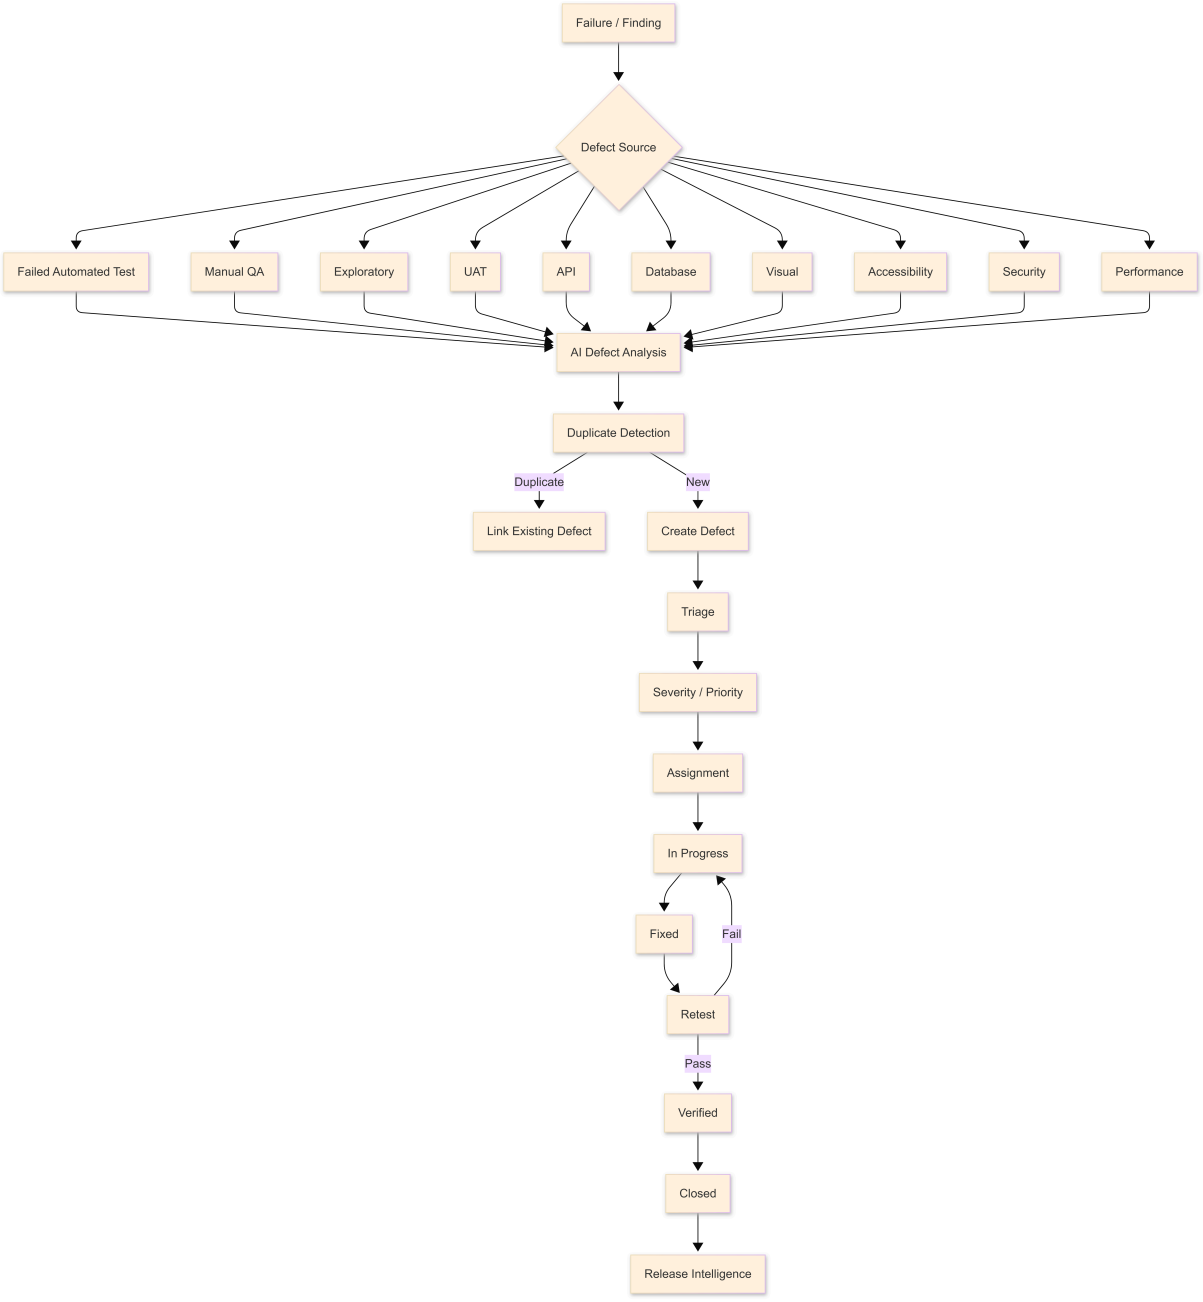

12. AI interaction model

```
✦ FAILUREIQ

Application defect detected


Payment API returned HTTP 500 after coupon validation.

Confidence        Evidence
96%               4 artifacts

WHY?
• API response matches 7 failed tests
• Same failure occurred in previous release
• No locator change detected

[Investigate]   [Create Defect]   [Run Related Tests]
```

13. Testing-domain architecture

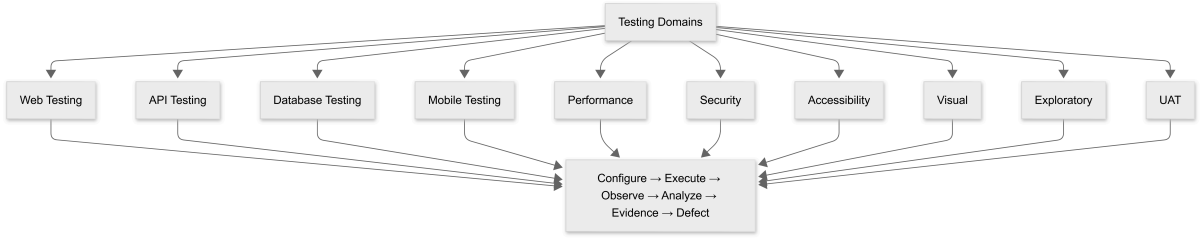

The **workspace itself changes by testing type**.

For example:

API

Collections
↓
Endpoint
↓
Request
↓

Response
↓
Assertions
↓
Contract
↓
Evidence

Database

Connection
↓
Schema
↓
Query
↓
Result
↓
Validation
↓
UI/API/DB Reconciliation
↓
Evidence

Performance


Scenario
↓
Load Model
↓
Virtual Users
↓
Execution
↓
Latency / Throughput / Errors
↓
Threshold

↓
Result

Security

Target
↓
Scan
↓
Finding
↓
Severity
↓
Evidence
↓
Remediation
↓
Defect

14. Global states

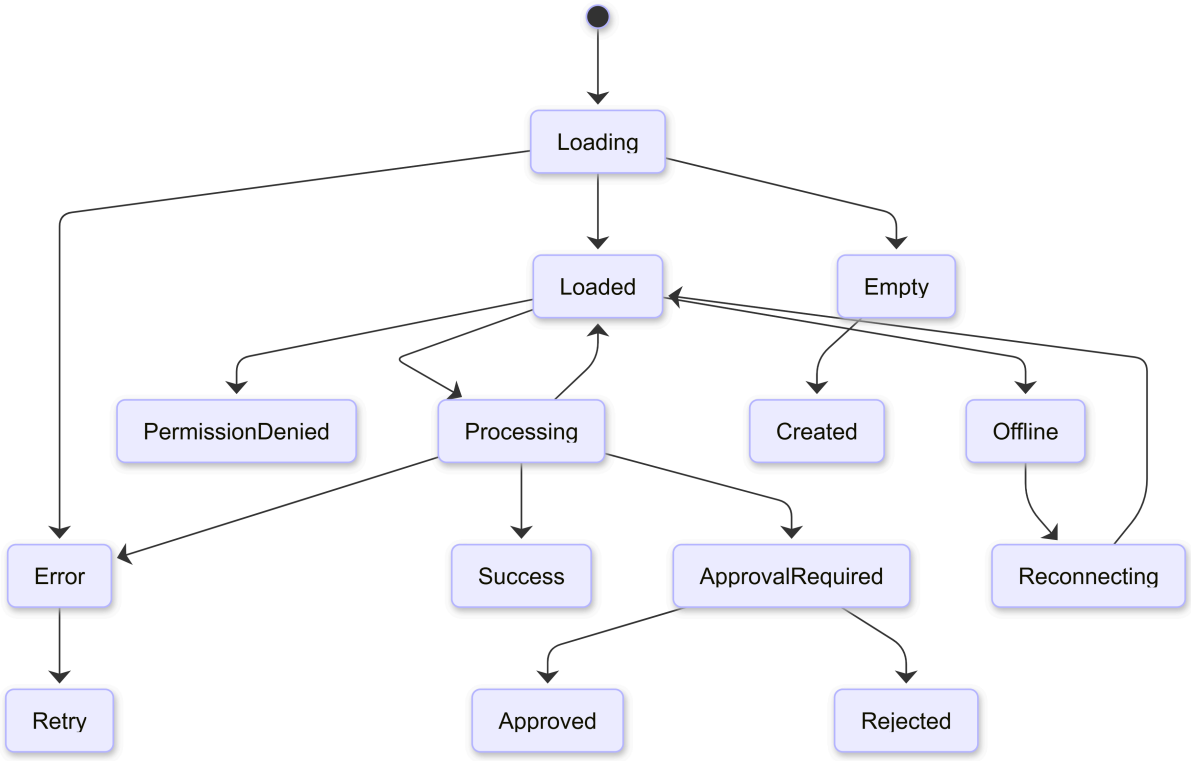

For example, an empty execution page should **not** say:

> No data.

It should say something like:

