1) What will be the output of the following pseudocode?


```
1  Integer p,q,r
2  Set p=4 , q=2 , r= 5
3  p=(q+p)+p
4  If ((q+p)<(r-q) && 3>p)
5  p=(q+r)+p
6  if ((p+r)+(r+q)>(p+r+q))
7  r=q+p
8  Else
9  r=(p+r)+p
10 End if
11 p=(9&6)+q
12 Else
13 q=r&r
14 If
15 ((q-5)< (5-q))
16 r=(6+6)&q
17 q=(q+7)+r
18 End if
19 p=(1^11)+q
20 End if
21 Print p+q+r
```

A) 32
B) 25
C) 24
D) 27

Answer : B

Code Bashers

2) What will be the output of the following pseudocode?

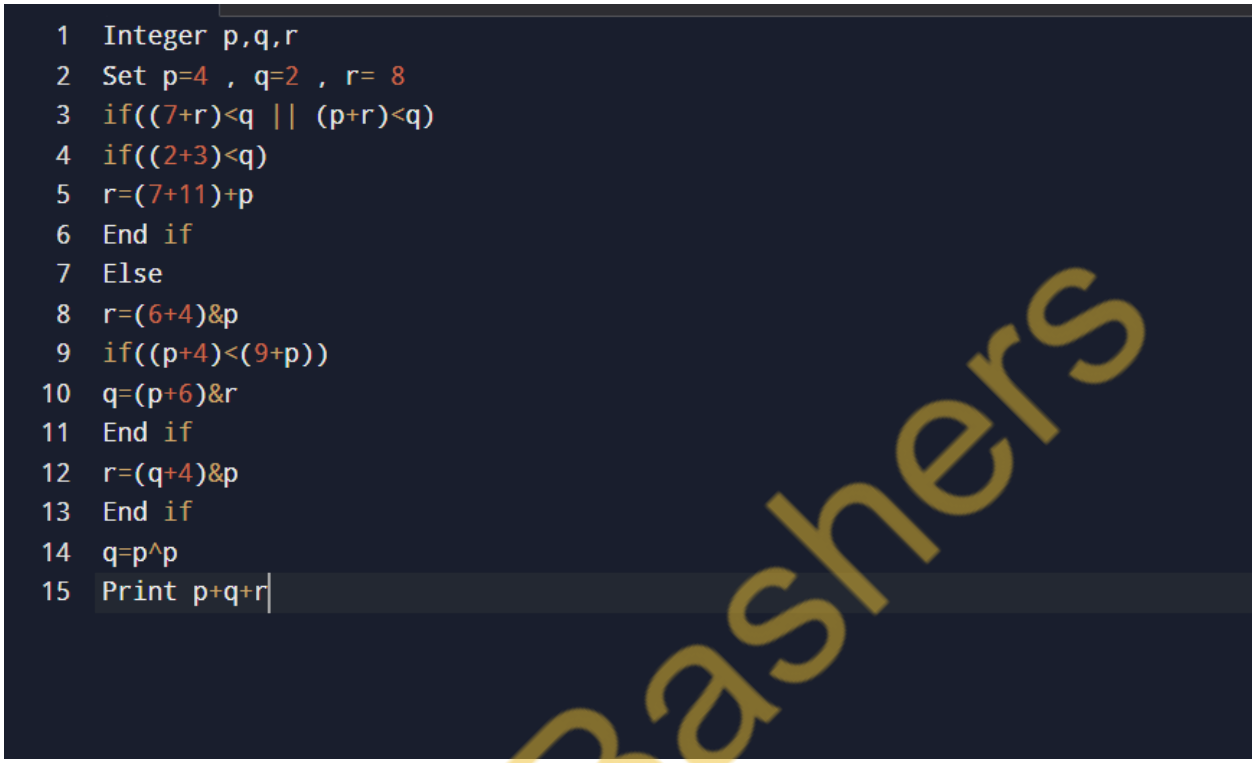

```
1  Integer p,q,r
2  Set p=4 , q=2 , r= 8
3  if((7+r)<q || (p+r)<q)
4  if((2+3)<q)
5  r=(7+11)+p
6  End if
7  Else
8  r=(6+4)&p
9  if((p+4)<(9+p))
10 q=(p+6)&r
11 End if
12 r=(q+4)&p
13 End if
14 q=p^p
15 Print p+q+r
```

A) 21
B) 11
C) 8
D) 2

Answer : C

Code Bashers

3) What will be the output of the following pseudocode?


```
1  Integer a,b,c
2  Set a=2, b=4 , c= 7
3  b=7+a
4  if(c>b)
5  b=b+b
6  End If
7  b=6+a
8  if((a+b)<(b-a) || c<a)
9  b=(c+4)+c
10 Else
11 a=c+b
12 End if
13 c=c+9^a
14 Print a+b+c
```

A) 71
B) 56
C) 47
D) 54

Answer : D

Code Bashers

4) What will be the output of the following pseudocode?

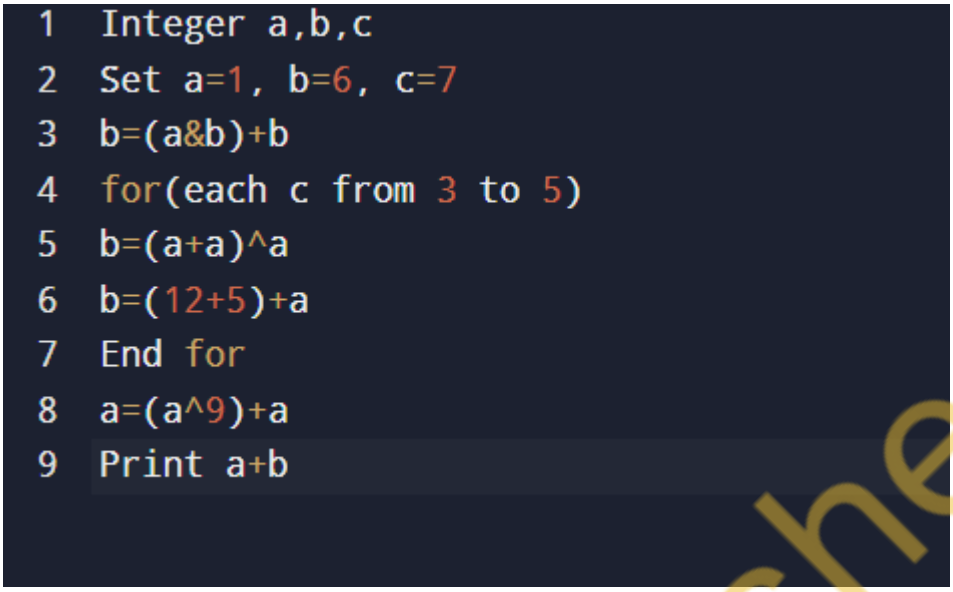

```
1  Integer a,b,c
2  Set a=1, b=6, c=7
3  b=(a&b)+b
4  for(each c from 3 to 5)
5  b=(a+a)^a
6  b=(12+5)+a
7  End for
8  a=(a^9)+a
9  Print a+b
```

A) 22
B) 28
C) 37
D) 36

Answer : C

Code Bashers

5) What will be the output of the following pseudocode for a=7 ,b=8?

```
1  Integer funn(Integer a, Integer b)
2  if((4-a)<(a-b) && a<b)
3  a=2+1+a
4  b=(a+3)+b
5  a=3+1+b
6  return funn(a,b)+funn(a,a)+1
7  End if
8  a=(a+2)+a
9  return a-1
```

A) 105
B) 100
C) 103
D) 112

Answer : C

6) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer p,q,r
2  Set p=6 , q=4 , r= 7
3  p=(r+5)+p
4  if((q&r&p)<(p&6))
5  r=3^r
6  q=q&q
7  End if
8  Print p+q+r
```

A) 44
B) 31
C) 11
D) 26

Answer : D

7) What will be the output of the following pseudocode?

```
1  Integer pp, qq, rr
2  Set pp = 0, qq = 7, rr = 9
3  if((qq + pp) < (pp + qq) && pp < rr)
4  pp=11+qq
5  End if
6  Print pp+ qq + rr
```

Answer: 16

8) What will be the output of the following pseudocode for a=4, b=4,c=7?

Code Bashers

```
1  Integer funn(Integer a, Integer b, Integer c)
2  for(each c from 3 to 5)
3  a=(c+c)^b
4  if((a+c)<(c+a))
5  b=(a+11)+c
6  Else
7  c=b+b
8  a=3+b
9  Continue
10 End if
11 End for
12 return a+b
```

Answer: 11

9) What will be the output of the following pseudocode?

```
1  Integer p,q,r
2  Set p=0 , q=4 , r= 4
3  if((p^q)<r)
4  p=(8&2)+r
5  q=8+p
6  if((p+r)<(r+p))
7  r=(r+q)+p
8  r=(4+11)+p
9  End if
10 End if
11 Print p+q+r
```

Answer: 8

Code Bashers

10) What will be the output of the following pseudocode for a=7,b=4?

```
1  Integer funn(Integer a, Integer b)
2  Integer c
3  Set c = a+a+b+b
4  b=c+c+b+b
5  a=b-a
6  return a + b
7  End function funn()
```

A) 113
B) 100
C) 97
D) 90

Answer : C

11) What will be the output of the following pseudocode?

```
1  Integer a, b, c
2  Set a = 4, b=9, c=9
3  if (b & (c >> 1))
4  a=a+1
5  End if
6  Print a+b+c
```

Answer : 22

Code Bashers

12) What will be the output of the following pseudocode for a=5,b=2?

```
1  Integer funn(Integer a, Integer b)
2  if(a>0 && b>0)
3  return b+funn(a-2,b-1)
4  Else
5  a=a^b
6  return a
7  End if
8  End function funn()
```

Answer : 4

13) What will be the output of the following pseudocode?

```
1  Integer a, b, c
2  Set a=0, b=1, c=2
3  if (b^c || a&b  || a>>1)
4  C = 9
5  a = b + c
6  Else
7  c = 1
8  a = a + c
9  End if
10 Print a + b + c
```

Answer : 20

14) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer p,q,r
2  Set p=2, q=3,r=5
3  q= (q+10)+p
4  p=(p+p) +q
5  if ((p&8&r) < (7&p))
6  q= (r+5)*&r
7  q=q^p
8  End if
9  Print p+q+r
```

Answer : 43

15) What will be the output of the following pseudocode?

```
1  a=7 b=2 c=8
2  If ((b^a)<a && (2^7)<c)
3  a=b+c
4  Else
5  c=(4+12)+a
6  b=11+a
7  print(a+b+c)
```

A) 18
B) 20
C) 23
D) 30

Answer : B

Code Bashers

16) What will be the output of the following pseudocode?
Integer p,q,r

```
1  Set p = 3,q=7,r = 9
2  p=(1+4)+r
3  p = (p + 3) & q
4  p = (q & 3) +q
5  Print p + q +r
```

Answer: 26

17) What will be the output of the following pseudocode?
Integer a,b,c

```
1  Set a=4, b=3, c=10
2  c=(b+12)+b
3  c=(b&c)+c
4  if((c-5)<(5+c))
5  a=(c&c)^a
6  a=(2+7)+b
7  a=(a&2)+c
8  End if
9  Print a+b+c
```

Answer : 43

18) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer a,b,c
2  Set a=8, b=6, c=7
3  for(each c from 2 to 5)
4  a=(2+10)+b
5  if((b+c)>(c-b))
6  Continue
7  Else
8  c=12+c
9  b=c+c
10 End if
11 End for
12 Print a+b
```

Answer: 24

19) What will be the output of the following pseudocode for a2,b=2,c=7?

```
1  Integer funn(Integer a, Integer b, Integer c)
2  for(each c from 4 to 7)
3  b=(6+8)+a
4  if((a^c)<c)
5  Continue
6  Else
7  jump out of the loop
8  End if
9  b=(a+5)+b
10 End for
11 return a+b
```

Answer: 8

Code Bashers

20) What will be the output of the following pseudocode?

```
1  Integer p,q,r
2  Set p=3, q=4, r=4
3  for(each from 5 to 8)
4  if((q+r)<(r-q))
5  Continue
6  End if
7  p=(p+7)+r
8  q=p+p
9  End for
10 Print p+q
```

Answer : 171

21) What will be the output of the following pseudocode?

```
1  Integer a,b,c
2  Set a=7, b=10, c=9
3  for(each c from 3 to 4)
4  a=b
5  if((b-a+c)<(c+b))
6  Continue
7  Else
8  Jump out of the loop
9  End if
10 a=(5+6)^c
11 End for
12 Print a+b
```

Answer : 20

Code Bashers

22) What will be the output of the following pseudocode?

```
1  Integer a,b
2  Set a=2, b=50
3  while(b>0)
4  a = b MOD 2 +a
5  if(a MOD 3 IS EQUAL TO 0)
6  Print (a)
7  else
8  Print(b-1)
9  b=b/5
10 a=a+1
11 end while
```

A) 3,3,3
B) 49,3,1
C) 50,10,2
D) 50,3,2
Answer : B

23) What will be the output of the following pseudocode?

Code Bashers

```
1   Integer p,q,r
2   Set p=0, q=2, r=9
3   r=7+p
4   q=q+r
5   for(each from 4 to 7)
6   p=(p+p)&q
7   if((p+q)<(r-p) || 8<p)
8   p=(p+2)+q
9   Jump out of the loop
10  End if
11  End for
12  Print p+q
```

A) 9
B) 5
C) 19
D) 10

Answer : A

24) What will be the output of the following pseudocode?

```
1   Set x to 0;
2   Set n to 1;
3   while (n <= 100)
4   x = x + n;
5   n = n + 1;
6   end write x
```

a. 5050

Code Bashers

b. 100

c. 4950

d. 5151

Answer : a

25) What will be the output of the following pseudocode?

```
1  Integer a, b, c, d, e
2  Set a=50, b=3, c=3
3  while(c>0)
4  d=a mod b
5  e=e + d + a
6  c=c-1
7  End while
8  Print e
```

a. 52

b. 100

c. 156

d. 153

Answer : c

26) What will be the output of the following pseudocode for i = 140?

Code Bashers

```
1  Integer fun(integer i)
2  if((i MOD 2) NOT EQUALS 0)
3  Return i
4  Else
5  Return fun (fun(i-1))
6  End function fun()
```

a. 139

b. 138

c. 140

d. None of the above

Answer : a

27) What will be the output of the following code?

Code Bashers

```c
#include <stdio.h>

int main()

{

int x=9, y=2, z=6;

int a = x&y|z;

printf("%d",a);

return 0;

}
```

a. Error

b. 2

c. 6

d. 3

Answer : c

28) What will be the output of the following pseudocode?

Code Bashers

```
1  Input f = 6, g = 9 and set sum = 0
2
3  Integer n
4
5  if (g > f)
6
7  for(n=f; n<g; n=n+1)
8
9  sum=sum+n
10
11 End of loop
12
13 else
14
15 print Error messages
16
17 print sum
```

Code Bashers

a. 21

b. 15

c. 12

d. 9

Answer : a

29) What will be the output of the following pseudocode?

```
1  p=6 q=3 r=5
2
3  q=1+r
4
5  q=5+q
6
7  If (5<r or (p+r)>(r-p))
8
9  p=(9&7)+pp
10
11 q=5+qq
12
13 print(p+q+r)
```

a) 28

b) 20

c) 30

d) 38

Answer : a

30) What will be the output of the following pseudocode for arr[] = 1,2,3,4,5

Code Bashers

```
1  Initialize i, n
2
3  Set arr[]= 1, 2, 3, 4, 5 for i = 0 ton 2
4
5  arr[i] = arr[i] + arr[i+1]
6
7  End for
```

Answer : 3 5 7 9 5

31) Predict the output of the following pseudocode.

Code Bashers

```
1  Integer x, y, z
2
3  Set x = 0, y = 3, z = 11
4
5  if(x + (1| 2) && y + (2 | 3))
6
7  x = x-2
8
9  y = x
10
11 Else
12
13 x = z
14
15 y = y ^ 2
16
17 End if
18
19 Print x + y + z
```

A. 15

B. 10

C. 13

D. 7

Answer : D

32) Predict the output of the following pseudocode for x = 10, y = 5

Code Bashers

```
1  Integer solve (Integer x, Integer y)
2
3  if(y > 0)
4
5  if (x > 0)
6
7  return x + y + solve(2, y- 5) + solve(x- 10, 1)
8
9  End if
10
11 End if
12
13 return x + y
14
15 End function solve()
```

Code Bashers

A. 15

B. 18

C. 13

D. 17

Answer : B

33) What will be the output of the following pseudocode for arr[] = 5, 4, 3, 2, 17

```
1  Initialize i, n
2
3  Initialize an array of size n
4
5  Take the values for the array
6
7  for i = 0 to n - 2
8
9  arr[i] = arr[i] - arr[i+1]
10
11 End for
```

A. 3 3 4 9 5
B. 1 1 1 1 1
C. 3 5 7 9 5
D. 2 2 2 2 2

Answer : B

34) Predict the output of the following pseudocode for n = 5, m = 6.

Code Bashers

```
1  Integer solve (Integer n, Integer m )
2
3  if(n > 4 && m < 7)
4
5  return solve(n +1, m + 1)
6
7  Else
8
9  Return n + m
10
11 End if
12
13 End function solve()
```

A.15

B.21

C.13

D.10

Answer : C

35) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer x, y, z
2
3  Set x = 10, y = 16,z = 3
4
5  if(x > y)
6
7  x = 2 * y
8
9  Else
10
11 y = x / 2 End if
12
13 if(z > y)
14
15 z = 2 * y
16
17 Else y = z / 2
18
19 End if
20
21 Print x + y + z
```

Code Bashers

Answer : 14

36) What will be the output of the following pseudocode for arr[] = 5, 4, 3, 2, 1

```
1  Initialize i, n
2
3  Initialize an array of size n
4
5  Take the values for the array
6
7  for i = 0 to n - 2
8
9  arr[i] = arr[i] * arr[i+1]
10
11 End for
```

A. 10 12 8 2 1

B. 20 12 6 2 1

C. 5 10 6 2 0

D. 20 4 6 1 1

Answer : B

37) What will be the output of the following pseudocode?

Code Bashers


```
1  Integer w, x, y, z
2
3  Set w 21, x = 11
4
5  for (each y from 21 to 30 )
6
7  for (each z from 1 to 0) w=w-1
8
9  if (w > y)
10
11 Continue
12
13 End if
14
15 w=1
16
17 if(w > z)
18
19 Jump out of the loop
20 End if
21
22 End for
23
24 End for
25 Print w + x
```

Code Bashers

A) 8
B) 12
C) 13
D) 2

Answer : B

38) What will be the output of the following pseudocode?

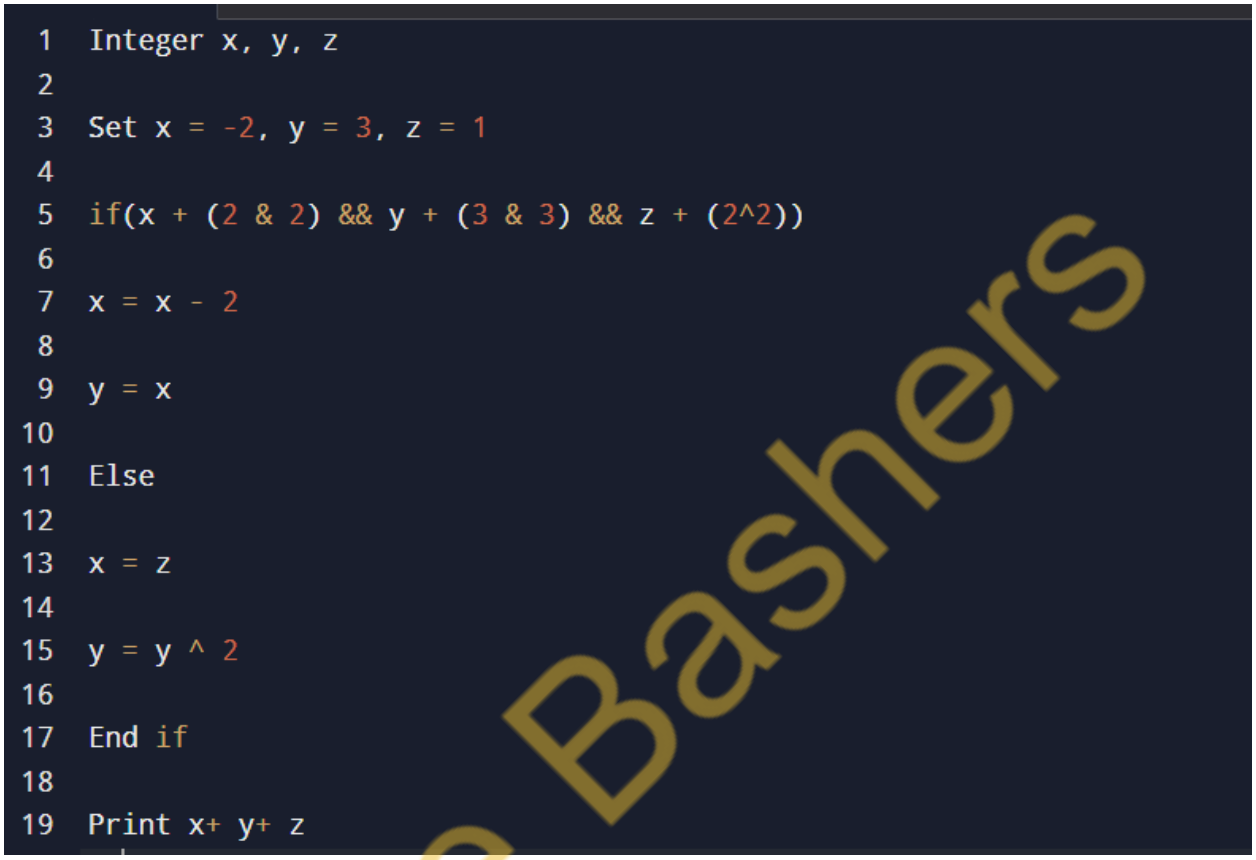

```
1  Integer x, y, z
2
3  Set x = -2, y = 3, z = 1
4
5  if(x + (2 & 2) && y + (3 & 3) && z + (2^2))
6
7  x = x - 2
8
9  y = x
10
11 Else
12
13 x = z
14
15 y = y ^ 2
16
17 End if
18
19 Print x+ y+ z
```

A) 2
B) 11
C) 13
D) 0

Answer : c

39) Print the output of the following pseudocode for x = 9, y = 7.

Code Bashers

```
1  Integer funn (Integer x, Integer y)
2
3  Integer z
4
5  Set z = 2
6
7  y = y mod z
8
9  x = x mod z
10
11 return x + y
12
13 End function funn()
```

A.2
B.3
C.17
D.5

Answer: A

40) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer x, y, z
2
3  Set x = 8, y = 6, z= 4
4
5  if(x > y)
6
7  x = y
8
9  Else
10
11 y = x
12
13 End if
14
15 if(z > y)
16
17 z = y
18
19 Else
20
21 y = z
22
23 End if
24
25 Print x + y + z
```

Code Bashers

a.13

b.17

c.14

d.23

Answer : c

41) Calculate the output of the following pseudocode for input p = 3, q = 8, r = 1.

```
1  Integer p, q, r, sum
2
3  Read p, q, r
4
5  Set sum=p+q+r
6
7  if ((p NOT EQUALS 0) and (sum EQUALS 11) and (q EQUALS 4) and (r NOT
       EQUALS 0))
8
9  Print "Success"
10
11 Otherwise
12
13 Print "Fail"
14
15 End if
```

a.Success

b.Fail

c.Error

d.None of the above

Answer : b

42) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer x, y, z
2
3  Set x = 10, y = 16, z= 3
4
5  if(x > y)
6
7  x = y
8
9  Else y = x
10
11 End if
12
13 if(z > y)
14
15 z = y
16
17 Else
18
19 y = z
20
21 End if
22
23 Print x + y + z
```

Code Bashers

a.13


b.12

c.16

d.20

Answer : c

43) Predict the output of the following pseudocode for a = 11, b = 12.

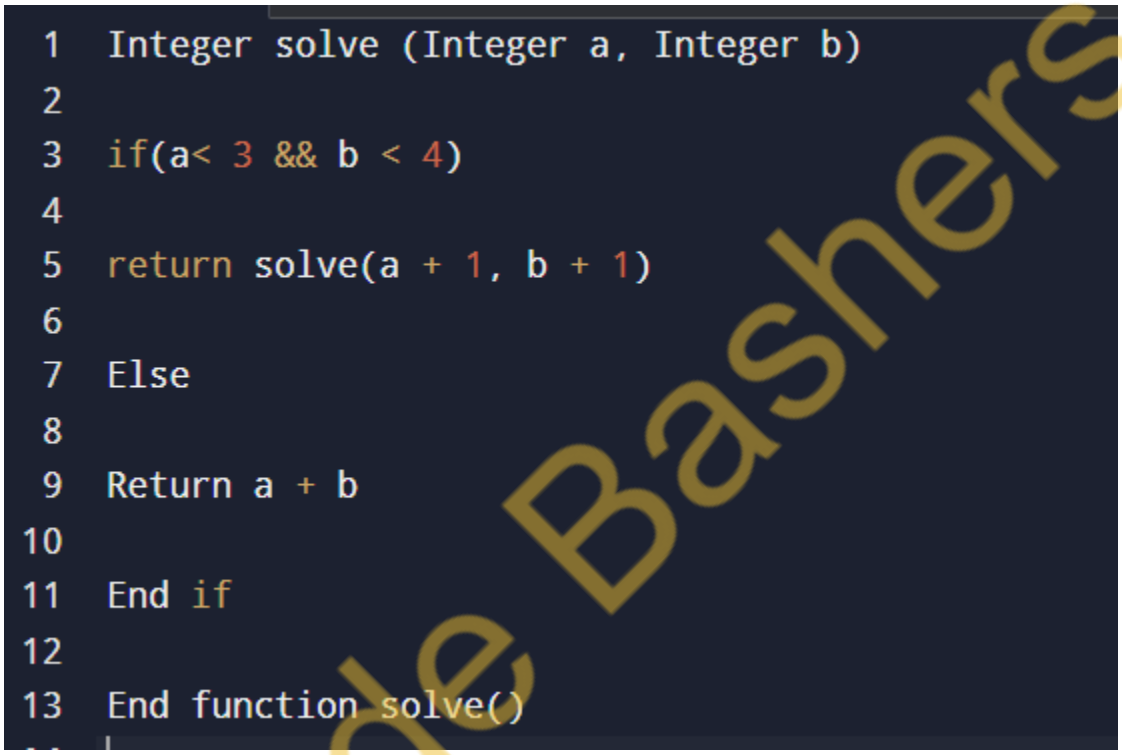

```
1  Integer solve (Integer a, Integer b)
2
3  if(a< 3 && b < 4)
4
5  return solve(a + 1, b + 1)
6
7  Else
8
9  Return a + b
10
11 End if
12
13 End function solve()
```

a.13

b.12

c.22

d.23

Answer : d

Code Bashers

44) What will be the output of the following pseudocode?

```
1  Integer pp, qq, rr
2  Set pp=0, qq=6, rr=7
3  pp=rr+pp
4  pp=(rr&4)^rr
5  if((qq&pp&rr)<(rr&qq))
6  if((qq^pp)<(rr+qq))
7  rr=(3+1)^pp
8  End if
9  End if
10 Print pp+qq+rr
```

A) 29
B) 18
C) 10
D) 16

Answer : D

45) What will be the output of the following pseudo code?

```
1  Integer p,q,r
2  Set p=9, q=6, r=10
3  if((q^p^r)>(r^q))
4  r=(11&12)+q
5  End if
6  if((q^6^8)>(p^4))
7  p=(r+3)&r
8  End if
9  Print p+q+r
```

Code Bashers

a.20

B.27

c.25

d.36

Answer : c

46) What will be the output of the following pseudo code?

```
1  Integer p,q,r
2  Set p=8, q=4, r=5
3  if((r+q) < (q-r) || p>q)
4  q=(q&8) &r
5  End if
6  Print p+q+r
```

a.17

b.10

c.23

d.13

Answer : d

47) What will be the output of the following pseudocode?

Code Bashers

```
1   Integer pp,qq,rr 2
2   Set pp=1, qq=2, rr=8
3   if((5+8)<(7+qq))
4   if((qq+pp)<(pp=qq))
5   rr=(rr+6)+rr
6   rr=(qq+pp)+pp
7   End if
8   rr=rr+pp
9   Else
10  if((pp+qq-rr)<(rr+pp))
11  pp=pp+rr
12  End if
13  rr=(pp&rr)+pp
14  End if
15  Print pp+qq+rr
```

A.35
B.49
C.19
D.28

Answer : D

48) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer a,b,c
2
3  Set a=1, b=2, c=9
4
5  if((b+c)>(c-b))
6
7  c=a+a
8
9  End if
10
11 if((7+3)<(6+a))
12
13 b=12+a
14
15 End if
16
17 Print a+b+c
```

A.5
B.1
C.9
D.20

Answer : A

49)

Code Bashers

```
1  Create a stack
2  Push 1 on to the stack
3  Push 2 on to the stack
4  Push 3 on to the stack
5  pop from the stack
6  pop from the stack
7  Push 4 on to the stack
8  Push 5 on to the stack
9  Push 6 on to the stack
10 pop from the stack
11 Push 7 on to the stack
12 pop from the stack
13 pop from the stack
14 pop from the stack
```

A.1
B.1,7
C.7
D.1,6,7

Answer : A

50) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer pp, qq, rr
2  Set pp=3, qq=5, rr=10
3  for (each rr from 4 to 5)
4  if((5-rr+pp)>(pp+qq))
5  End if
6  Jump out of the loop
7  pp=qq+rr qq=rr+pp
8  End for
9  Print pp+qq
```

A.41
B.45
C.37
D.55

Answer : A

51) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer a,b,c
2  Set a-3, b-2, c-4
3  c=(c&3)+b
4  if((9&a)<(c^9)) 5
5  c=(a+c)+b
6  a=3+b
7  Else
8  a=(11+1)+c
9  if((c-a+b)<(b-c))
10 b=(7+1)+b
11 End if b=(b^a)+b
12 b=10+c
13 End if
14 Print a+b+c
```

A.28
B.3
C.21
D.12

Answer : D

52) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer a,b,c
2  Set a=8, b=4, C=4
3  for(each c from 2 to 3)
4  b=c+b
5  if((a+9)<(9-a))
6  Continue
7  Else
8  Jump out of the loop
9  End if
10 b=(2+8)+a
11 End for
12 Print a+b
```

A.14
B.7
C.19
D.25

Answer : A

53) What will be the output of the following pseudocode?

```
1  Integer a,b,c
2  Set a=1, b=7, c=10
3  3 if(b>a)
4  c=2&a
5  if((a&c&b)<(c+b-a))
6  End if
7  c=(a^6)^c
8  End if
9  Print a+b+c
```

Code Bashers

A.29
B.20
C.15
D.12

Answer : C

54) What will be the output of the following pseudocode at a=5,b=5,c=5?

```
Integer funn(Integer a, Integer b, Integer c)
if((c&a)<a && (a^b)<b)
c=(a^2)+b
End if
return a+b+c
```

A.14
B.27
C.22
D.15

Answer : D

55) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer a,b,c
2  Set a=7, b=2, c=8
3  if((b^a)<a && (2^7)c)
4  Else
5  c=(4+12)+a
6  a=b+c
7  b-11+a
8  End if
9  Print a+b+c
```

A.18
B.20
C.23
D.30

Answer : C

56) What will be the output of the following pseudocode?

```
1  Integer a, b, c
2  Set a=2, b=6, c=8
3  a=(10+9)+c
4  if((c+b)>(a-c))
5  a=b+c
6  b=b+b
7  End if
8  Print a+b+c
```

A.23
B.41

Code Bashers

C.48
D.58

Answer : B

57) What will be the output of the following pseudocode for a=0, b=2, c=10?

```
1  Integer funn (Integer a, Integer b, Integer c)
2  b=7+a
3  a=(a+c)+a
4  b=(b+b)+c
5  c=1+b
6  return a+b+c
7  End function funn()
```

A.59
B.68
C.70
D.39

Answer : A

58) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer a,b,c
2  Set a =2, b=2, c=6
3  b=(c+9)+c
4  if((a-c)<(c-a))
5  c=a^a
6  Else
7  if((c+b)<(a-c))
8  a=(a^b)+b
9  b=a+a
10 Else
11 b=10+a
12 End if
13 b=4+a
14 End if
15 b=4+a
16 Print a+b+c
```

Answer : 8

59) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer p,q,r
2  Set p=9, q=5, r=4
3  if((q+p)<(6-q))
4  p=12+p
5  if(5<q)
6  if((p+9)<(9-p))
7  p=2+p
8  End if
9  End if
10 r=(p+8)^q
11 End if
12 Print p+q+r
```

Answer : 18

60) What will be the output of the following pseudocode for a=2 , b=3?

```
1  Integer funn(Integer a, Integer b)
2  if((a+b)>(3&a) && a<3)
3  a=2+1+a
4  b=3+b+b
5  return funn(a,b+a)+a+funn(a,b)
6  End if
7  return b-a+1
```


A.31
B.22

Code Bashers

C.20
D.16

Answer : C

61) What will be the output of the following pseudocode?

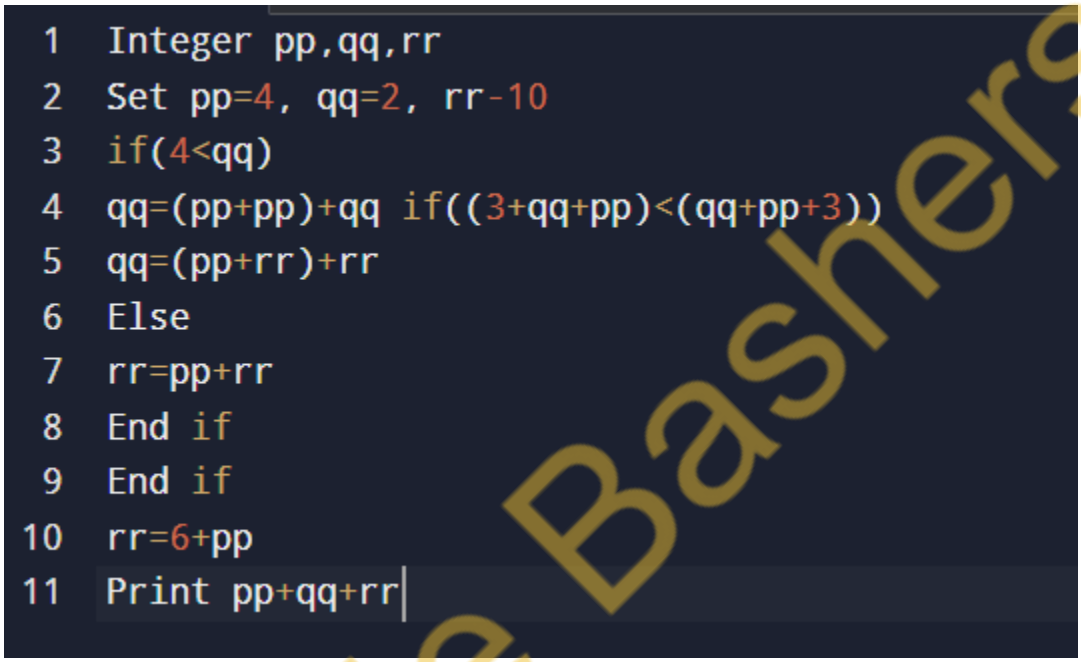

```
1  Integer pp,qq,rr
2  Set pp=4, qq=2, rr-10
3  if(4<qq)
4  qq=(pp+pp)+qq if((3+qq+pp)<(qq+pp+3))
5  qq=(pp+rr)+rr
6  Else
7  rr=pp+rr
8  End if
9  End if
10 rr=6+pp
11 Print pp+qq+rr
```

Answer : 16

62) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer a,b,c
2  Set a=5, b=5, c=5
3  if(axb && (a&c)<b)
4  b=c+a
5  End if
6  if((c+a)<(a-c)) c=(12+2)+b
7  End if
8  Print a+b+c
```

A.21
B.15
C.14
D.19

Answer : B

63) What will be the output of the following pseudocode?

```
1  Integer a,b,c
2  Set a=0, b=4, c=7
3  if(acc || (a+b)<c)
4  b=4&c
5  if((a+b)>(c-a)) a=(b+2)&a
6  End if
7  c=(1+5)^c
8  End if
9  c=(a+b)^c
10 Print a+b+c
```

Answer : 9

Code Bashers

64) What will be the output of the following pseudocode?

```
1  Integer a,b,c
2  Set a=2, b=8, c=6
3  if((c+a)<(b-c))
4  b=c+c
5  Else
6  b=(9+9)&c
7  if((c+b+a)<(b&a&c))
8  a=(c+c)^b
9  Else b=(12&3)+a
10 End if
11 End if
12 a=(b+a)^c
13 Print a+b+c
```

Answer : 10

65) What will be the output of the following pseudo code for a=4, b=8, c=57

Code Bashers

```
Integer funn(Integer a, Integer b, Integer c)
b=(a^11)&b
for(each c from 3 to 6)
b=3+c
if(1<b || (a&c)<(5-a))
a(c+2)+c
b=c+c
Jump out of the loop
End if
End for
return a+b
```

Answer : 14

66) What will be the output of the following pseudocode?

```
Integer p,q,r
Set p=0, q=2, r=9
r=7+p
q=q+r
for(each r from 4 to 7)
p=(p+p)&q
if((p+q)<(r-p) || 8<p)
p=(p+2)+q
Jump out of the loop
End if
End for
Print p+q
```

Answer : 9

Code Bashers

67) What will be the output of the following pseudocode?

```
1  Integer p,q,r
2  Set p = 6, q = 4, r = 7
3  p = (r + 5) + p
4  if((q&r&p)<(p&6))
5  r = 3 ^ r
6  q=q&q
7  End if
8  Print p + q + r
```

Answer : 26

68) What will be the output of the following pseudocode?

```
1  Integer pp,qq,rr
2  Set pp=4, qq=3, rr=9
3  pp=3^rr
4  if((pp&qq&rr)<(qq+rr-pp))
5  pp=(11810)^pp
6  rr=(10+3)&pp
7  End if
8  Print pp+qq+rr
```

Code Bashers

Answer : 3

69) What will be the output of the following pseudocode?

```
1  Integer p,q,r
2  Set p=4, q=2, r=9
3  for (each rfrom 5 to 8)
4  if(3<q && 6<q)
5  p=(q^r)^q
6  End if
7  if((p+8)<(8+p))
8  p=(6&1)+q
9  End if
10 q=(p+1)+r
11 End for
12 Print p+q+r
```

Answer : 34

70) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer p,q,r
2  Set pass p=0, q=5, r=6
3  q=(q&2)+r
4  if((p^3)<3 && 5>r)
5  q=1+r
6  Else
7  q=5^r
8  for(each r from 2 to 6)
9  q=10+p
10 End for
11 End if
12 q=r+r
13 Print p+q+r
```

Answer : 27

71) What will be the output of the following pseudo code for a=3, b=3?

```
1  Integer funn(Integer a, Integer b)
2  if((a+b)>(b^a) && a<4)
3  b=b+1
4  b=2+b+b
5  a=b+3
6  return funn(b+2,b+1)+funn(b,b)+b
7  End if
8  a=a+1
9  return b-a+1
```

A.9

Code Bashers

B.15
C.4
D.19

Answer : A

72) What will be the output of the following pseudocode?

```
1  Integer p,q,r
2  Set p = 5 ,q=8,r=5
3  if((9&p)<r||q>r)
4  q=5&q
5  End if
6  q=11+p
7  if ((q + p) > (p - q))
8  r= (p + p) +q
9  End if
10 p  = (p + r) + q
11 Print p + q + r
```

A.90
B.87
C.89
D.96

Answer : C

73) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer pp,qq,rr
2  set pp=5, qq=6, rr=4
3  qq=(pp+qq)+qq
4  for(each rr from 3 to 6)
5  qq=(qq^qq)^qq
6  qq=(rr+pp)+rr
7  End for
8  pp=(1^7)^rr
9  Print pp+qq
```

A.16
B.24
C.18
D.19

Answer : C

74) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer a,b,c
2  Set a=8, b=4, C=4
3  for(each c from 2 to 3)
4  b=c+b
5  if((a+9)<(9-a))
6  Continue
7  Else
8  Jump out of the loop
9  End if
10 b=(2+8)+a
11 End for
12 Print a+b
```

A.28
B.3
C.21
D.12

Answer : D

75) What will be the output of the following pseudocode for a=7, b=4?

```
1  Integer funn(Integer a, Integer b)
2  if(b<6 && (b&a)<(a+b))
3  b=1+b+a
4  b=3+1+a
5  return b-funn(b,b)
6  End if
7  b=1+b+b
8  return b
```

Code Bashers

A.-19
B.-7
C.-12
D.7

Answer : C

76) What will be the output of the following pseudocode?

```
1  Num=11
2
3  if((num&1)==1)
4
5  print HeyAnshika
6
7  else
8
9  printHeySubscribers
```

Answer : HeyAnshika

77) What will be the output of the following pseudocode?

Code Bashers

```
integer a,b,c

set a=6, b=5, c=4

if((a^9)<(9+a))

a=b+b

else if

((a&b&c)>(c&a))
b=(1+3)^c
end if
end if
print a+b+c
```

Answer : 15

78) What will be the output of the following pseudocode?

Code Bashers

```
integer a,b,c

set a=3, b=5, c=4

c=(6^2)+b

for(each c from 3 to 5)

b=(b+2)&c

a=3&b

b=(c^a)+c

a= (5+2)&a

end for

print a+b
```

Answer : 10

79) What will be the output of the following pseudocode?

Code Bashers

```
int HeyThere (int n, int r){

if(n>0)

return (n%r + HeyThere (n/r, r));

else

return 0;

int ans =HeyThere(257,2);

print ans;
```

Answer : 2

80) What will be the output of the following pseudocode?

Code Bashers

```
1  int fun(int n){ if(n==1)
2
3  else
4
5  return 1;
6
7  return 1 + fun(n-1);
8
9  }
10
11 int main(){
12
13 n=3;
14
15 printf("%d", fun(n));
16
17 }
18
19 return 0;
```

Code Bashers

Answer : 2

81) What will be the output of the following pseudocode?

```
1  Integer p,q,r
2  Set p=5, q=8,r=4
3  if((p^9)<(10p))
4  p=q+q
5  Else
6  if((p&q&r)>(r&p))
7  q=(1+))^r
8  End if
9  End if
10 Print p+q+r
```

A.19
B.25
C.36
D.28

Answer : D

82) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer p,q,r
2  Set p=8, q=7, r=8
3  r=11+q
4  if((r+p+q)<(p-q-r))
5  q=r+p
6  if((r+9)<(8+r)) p=(r+9)+r
7  Else
8  p=(p+12)+p
9  End if
10 Else
11 q=(1+7)+r
12 ((q+p+5)<(p+r+q))
13 q=(q+p)+r
14 End if
15 End if
16 p=(r+r) r
17 Print p+q+r
```

Code Bashers

A.108
B.114
C.104
D.124

Answer : D

83) What will be the output of the following pseudocode?

```
1  Set a=3, b=5, c=4
2  if((1+c+8)<(8+1))
3  if((1-7)>(b+1))
4  a=a+b
5  Else
6  a=(b+3)+c
7  End if
8  a=5+b
9  Else
10 if((c+9)+(9+3)>(c+a+b))
11 a=(4+4)+b
12 Else
13 c=(4+8)+a
14 End if
15 a=3+c
16 End if
17 c=(8+7)+c
18 print a+b+c
```

A.31
B.11
C.14
D.24

Answer : A

84) What will be the output of the following program?

Code Bashers

```c
#include <stdio.h>
void main()
{
printf("10!=9: %5d",10!=9);
```

A.1
B.0
C.error
D.none of these

Answer : A

85) What will be the output of the following program?

```c
#include <stdio.h>
int main()
{
int y = 10000;
int y = 34;
printf("Hello World! %d\n", y);
return 0;
}
```

A.Compile time error
B.Hello World!34
C.Hello World!1000
D.Hello World! Followed by a junk value

Answer : A

86) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer pp, qq, rr
2  Set pp = 6, qq = 3, rr = 5
3   qq = 1 +rr
4   qq = 5 + qq
5   if(5<rr OR (pp+rr) > (rr-pp))
6   pp = (9 & 7) + pp
7   qq = 5 + qq
8   End if
9   Print pp + qq + rr
```

A.28
B.20
C.30
D.38

Answer : A

87) What will be the output of the following pseudocode?

Code Bashers

```
 1   Integer p, q, r
 2  Set p=2, q=5
 3  q=p+q
 4  for (each r from q to 8)
 5  q=p
 6  End for
 7  if (p > q)
 8  q=0
 9  Else
10  q=1
11  End if
12  Print p+q+r
```

A.12
B.20
C.7
D.15

Answer : A

88) What will be the output of the following pseudocode?

```
1   Integer pp,qq,rr
2   Set pp = 1, qq = 2, rr= 7
3   rr = (rr + 9) + qq
4   pp=pp
5   qq = (pp + 7) & rr
6   rr = 1 + rr
7   Print pp + qq + rr
```

A. 17

Code Bashers

B.25
C.20
D.28

Answer : C

89) What will be the output of the following pseudocode?

```
1  Integer p, q, r
2  Set p=5, q=8,r=4
3  if((p^9)<10+p))
4  p=q+q
5  Else
6  if((p&q&r)>(r&p))
7  q=(1+3)^r
8  End if
9  End if
10 Print p+q+r
```

A. 17
B.25
C.20
D.28

Answer D

90) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer p=1, q=2
2
3  for(Integer i=0;i<=6;i=i+2)
4
5  p=p+q+i
6
7  p=p+q
8
9  q=p-q
10
11 print q
12
13 End for
```

Answer : 3 10 27 70

91) What will be the output of the following pseudocode?

```
1  Integer m
2
3  for(m=3;m!=0;m--)
4
5  print m
6
7  m=m-1
8
9  End for
```

Answer : Infinite

Code Bashers

92) What will be the output of the following pseudocode?

```
Integer a,b,c

set a=24, b=8

c= b<<a

print c
```

Answer : 8 * 2^24

93) What will be the output of the following pseudocode?

```
int main(){

int p=10, q=20, r=30;

if(r>q>p)

print("True")

else

print("false")

return 0;

}
```

Code Bashers

Answer : False

94) What will be the output of the following pseudocode?

```
1  Initialize Integer x, y, z
2
3  Set y = 1, x = 2
4
5  z = x^y
6
7  Print z
```

A.1
B.2
C.4
D.3

Answer D

95) What will be the output of the following pseudocode?


```
1  Integer value, n
2
3  Set value = 1, n = 45
4  while(value less than equal to n) value value << 1
5
6  end loop
7
8  Print value
```

Code Bashers

A.16
B.32
C.64
D.36

Answer: C

96) What will be the output of the following pseudocode?

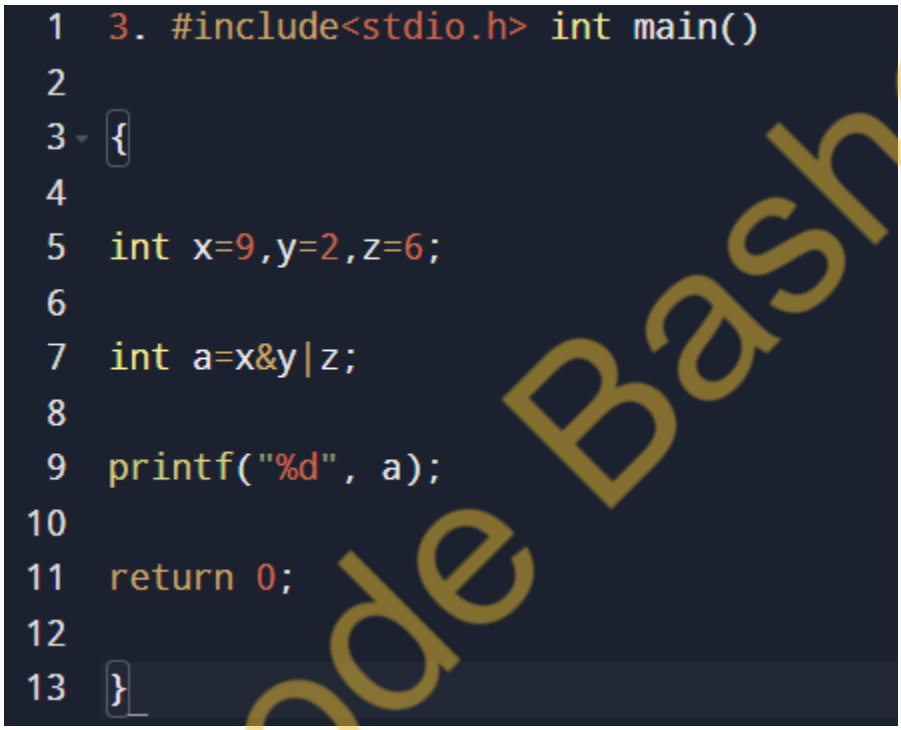

```
3. #include<stdio.h> int main()

{

int x=9,y=2,z=6;

int a=x&y|z;

printf("%d", a);

return 0;

}
```

A.Error
B.2
C.6
D.3

Answer: C

97) What will be the output of the following pseudocode?

Code Bashers

```
1  Set Character m='a
2  Set Integer count=0
3
4  while(m>'a')
5
6  count++
7
8  m-
9
10 end-while
11
12 display count
```

Answer : 0

98) What will be the output of the following pseudocode?


```
1  Integer x, y Set x 15, y = 12
2
3  y=x-1
4
5  do {
6
7  Print x
8
9  x= y+(x-2)
10 }
11
12 while(x < 40) end do while
```

Code Bashers

A.14 26
B.15 27 39
C.27 39
D.15

Answer: B

99) What will be the output of the following pseudocode?

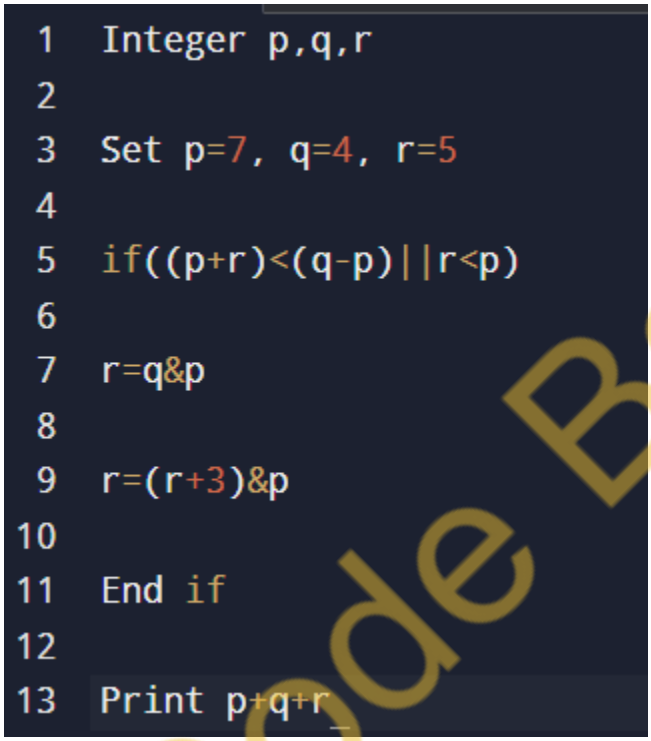

```
1  Integer p,q,r
2
3  Set p=7, q=4, r=5
4
5  if((p+r)<(q-p)||r<p)
6
7  r=q&p
8
9  r=(r+3)&p
10
11 End if
12
13 Print p+q+r
```

Answer : 18

100) What will be the output of the following pseudocode?

Code Bashers

```c
#include<stdio.h>

int main()

{

int x=11, y=4, z=3;

y = !x;

z= !!x;

printf("%d %d", y,z);
return 0;
}
```

Answer : 0,1

101) What will be the output of the following pseudocode?

Code Bashers

```c
#include<stdio.h>

int main ()

{

char c,a,b;

c='f';

a='s';

b='x';

int sum= c+a+b;

printf ("%d", sum);

}
```

Answer : 337

102) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer funn (Integer a, Integer b)
2
3  a=a<<(a-2)
4
5  b=b>>(b-5)
6
7  a=a+1
8
9  b=b+1
10
11 return a+b
12
13 End function funn()
```

Answer : 21

103) Predict the output of the following pseudo-code if x= 1 and y=2?

```
1  Integer solve(int x, int y)
2
3  if(x > 1)
4
5  solve(x1, y + 3)
6
7  end if
8
9  print y
10
11 End function solve()
```

Code Bashers

A.2
B.3
C.6
D.4

Answer: A


104) What will be the output of the following pseudocode?



```
#include<stdio.h>
int main()
{
   char c= 'Z';
   printf("%d",c);
}
```

Answer : 90

105) What will be the value of the following pseudocode?

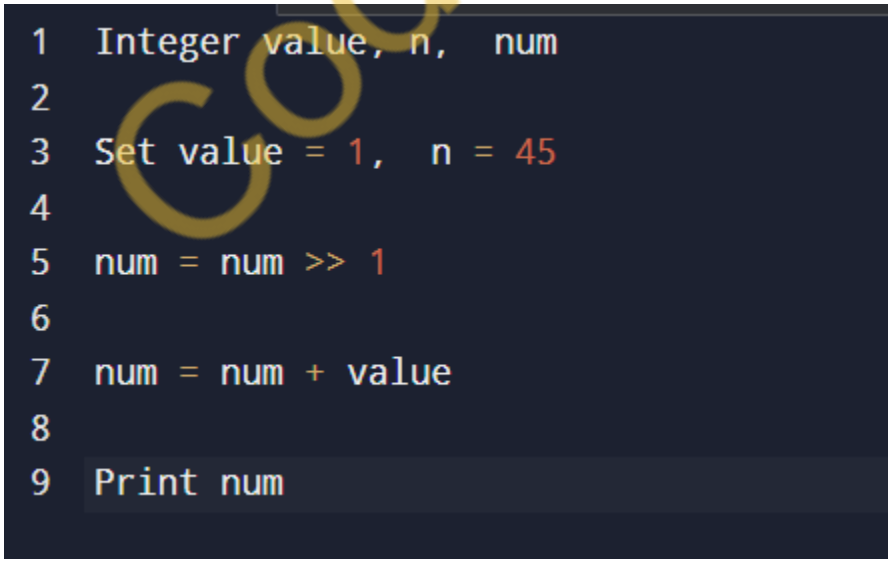

```
1  Integer value, n,  num
2
3  Set value = 1,  n = 45
4
5  num = num >> 1
6
7  num = num + value
8
9  Print num
```

Code Bashers

A.44


B.0

C.1

D.12

Answer - Option C

106) What will be the value of the following pseudocode?

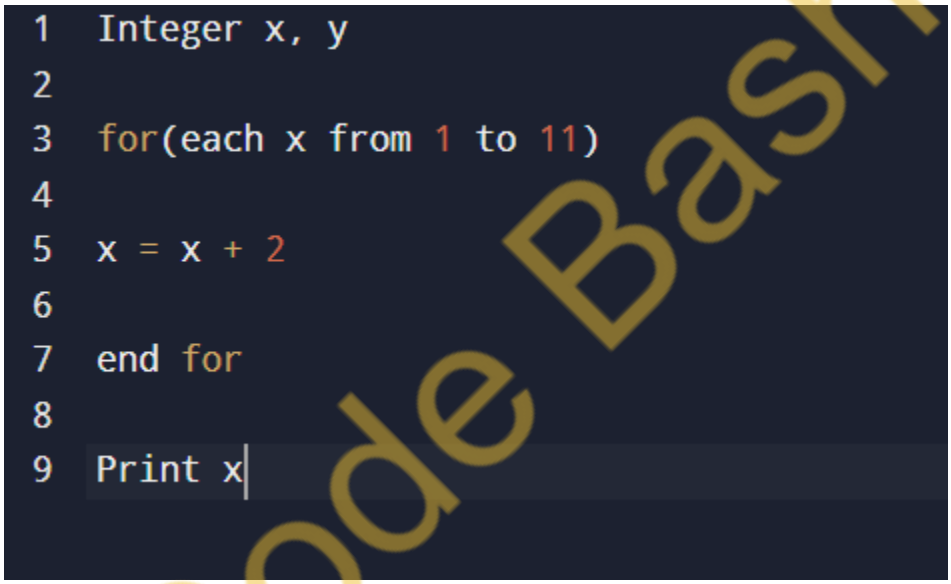

A.11

B.10


C.12

D.13

Code Bashers

Answer - Option D

107) What will be the value of the following pseudocode?

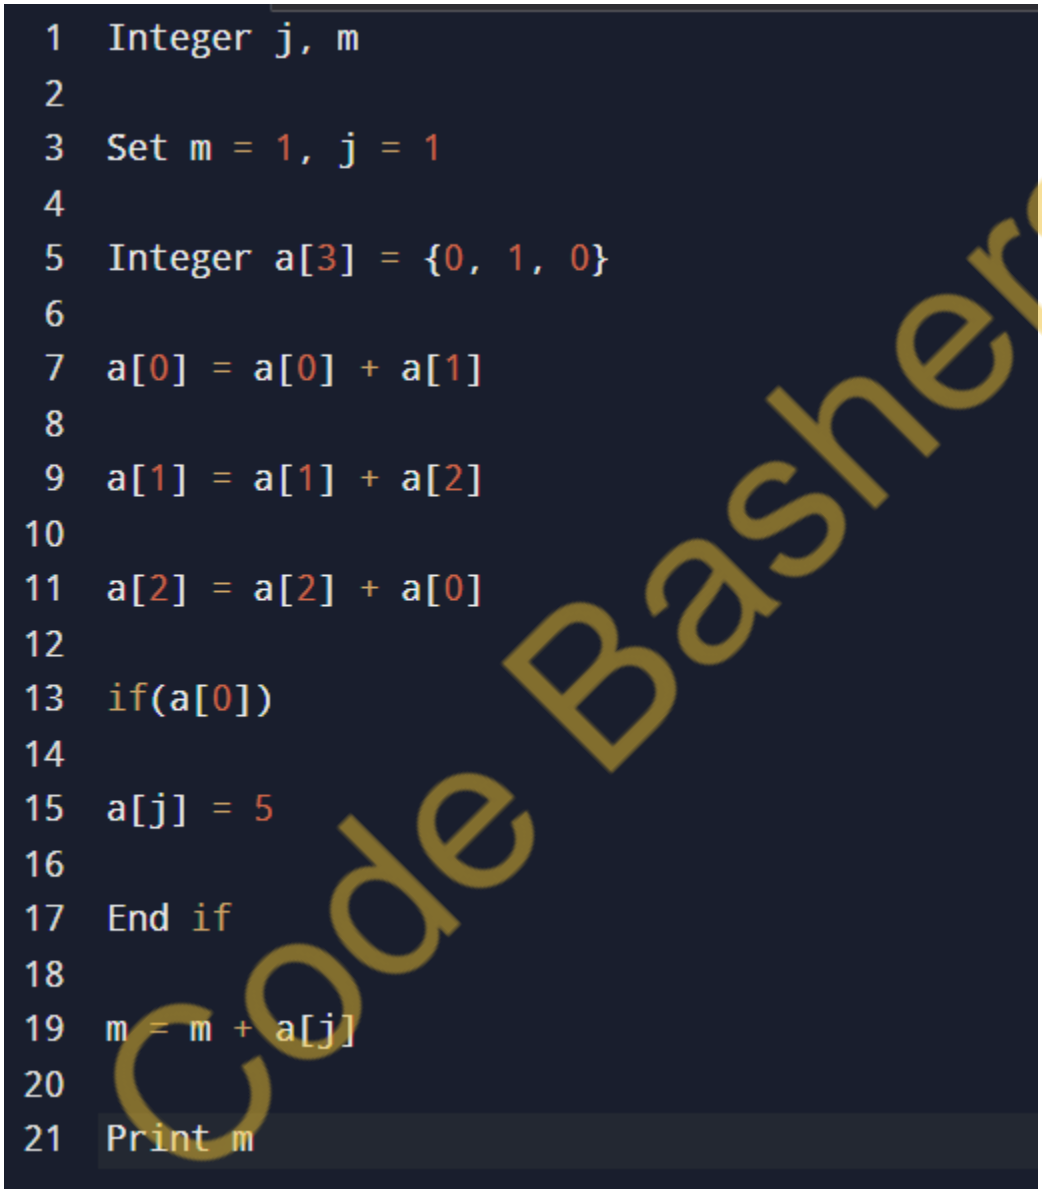

```
1  Integer j, m
2
3  Set m = 1, j = 1
4
5  Integer a[3] = {0, 1, 0}
6
7  a[0] = a[0] + a[1]
8
9  a[1] = a[1] + a[2]
10
11 a[2] = a[2] + a[0]
12
13 if(a[0])
14
15 a[j] = 5
16
17 End if
18
19 m = m + a[j]
20
21 Print m
```

Code Bashers

A.3


B.2

C.6

D.4

Answer - Option C

108) What will be the value of the following pseudocode for k=150?

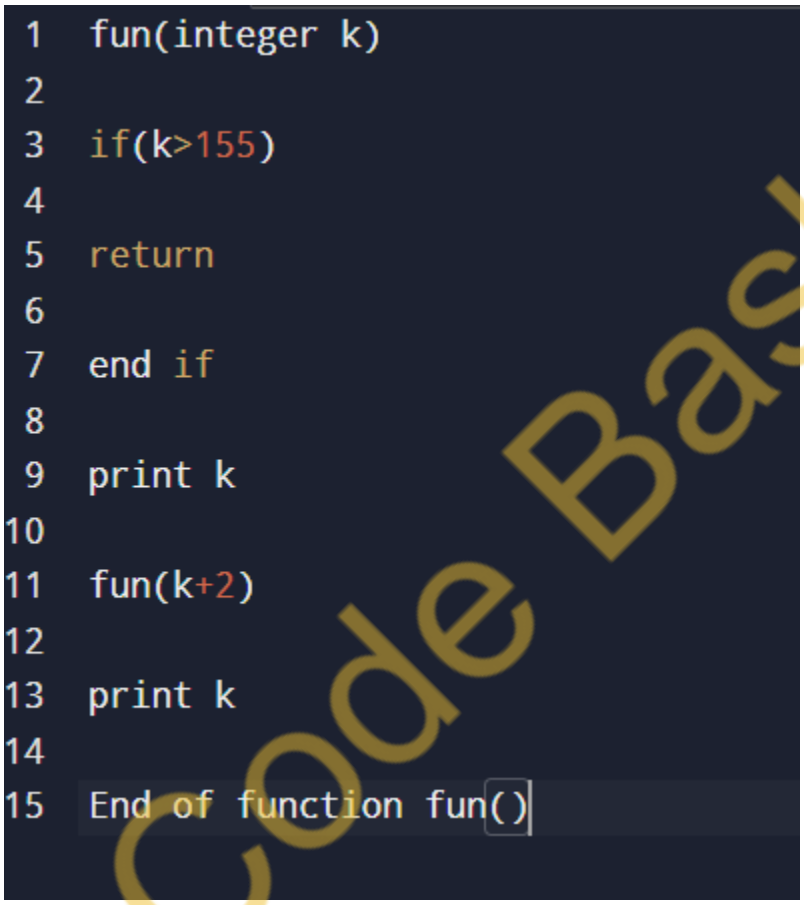

```
1  fun(integer k)
2
3  if(k>155)
4
5  return
6
7  end if
8
9  print k
10
11 fun(k+2)
12
13 print k
14
15 End of function fun()
```

Code Bashers

A. 150 152 154


B. 150 152 154 154 152 150

C. 150

D. None of the mentioned

Answer - Option B

109) What will be the output of the following pseudocode?

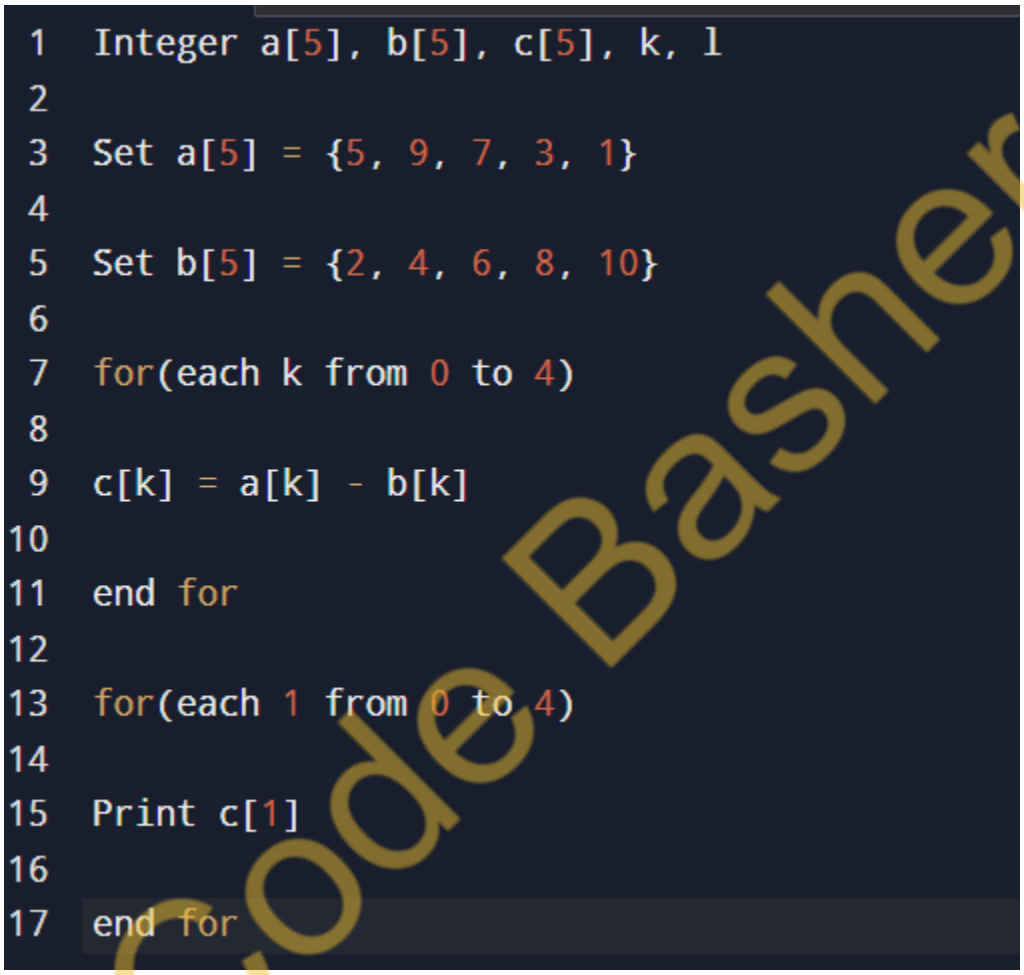

```
1  Integer a[5], b[5], c[5], k, l
2
3  Set a[5] = {5, 9, 7, 3, 1}
4
5  Set b[5] = {2, 4, 6, 8, 10}
6
7  for(each k from 0 to 4)
8
9  c[k] = a[k] - b[k]
10
11 end for
12
13 for(each 1 from 0 to 4)
14
15 Print c[1]
16
17 end for
```

Code Bashers

A. 7 13 13 11 11


B. 3 5 1 -5 -9

C. -3 -5 -1 5 9

D. None

Answer - Option B

110) How many times “A” will be printed in the following pseudocode?

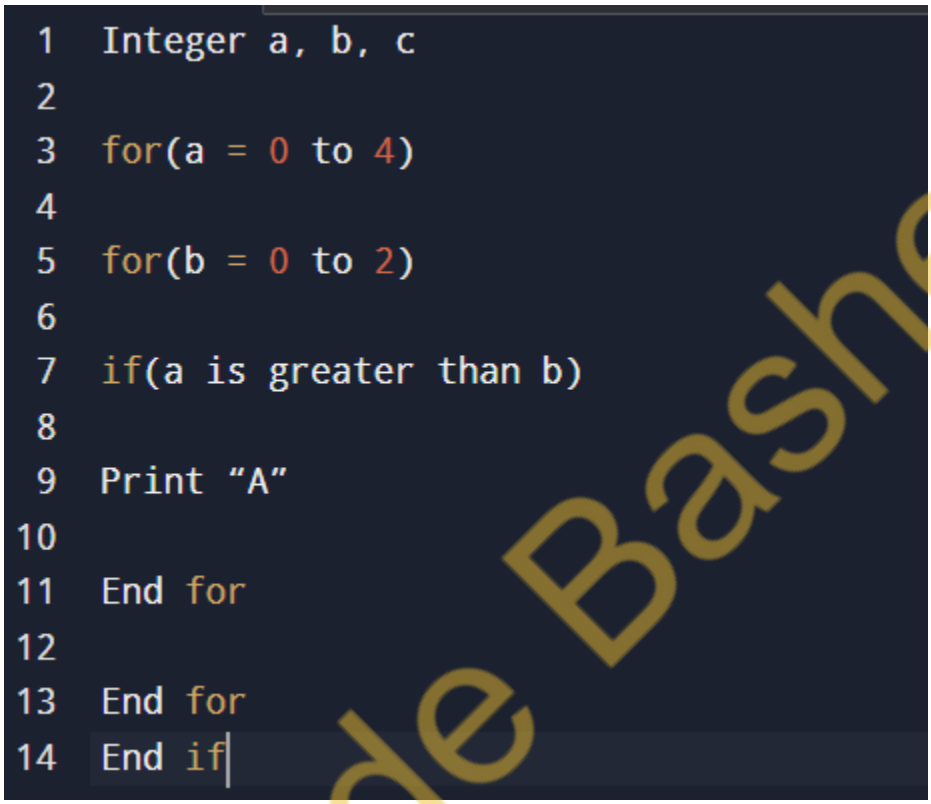

```
1  Integer a, b, c
2
3  for(a = 0 to 4)
4
5  for(b = 0 to 2)
6
7  if(a is greater than b)
8
9  Print “A”
10
11 End for
12
13 End for
14 End if
```

A.8

B.7


C.9

D.10

Answer - Option C

Code Bashers

111) What will be the output of the following pseudocode?

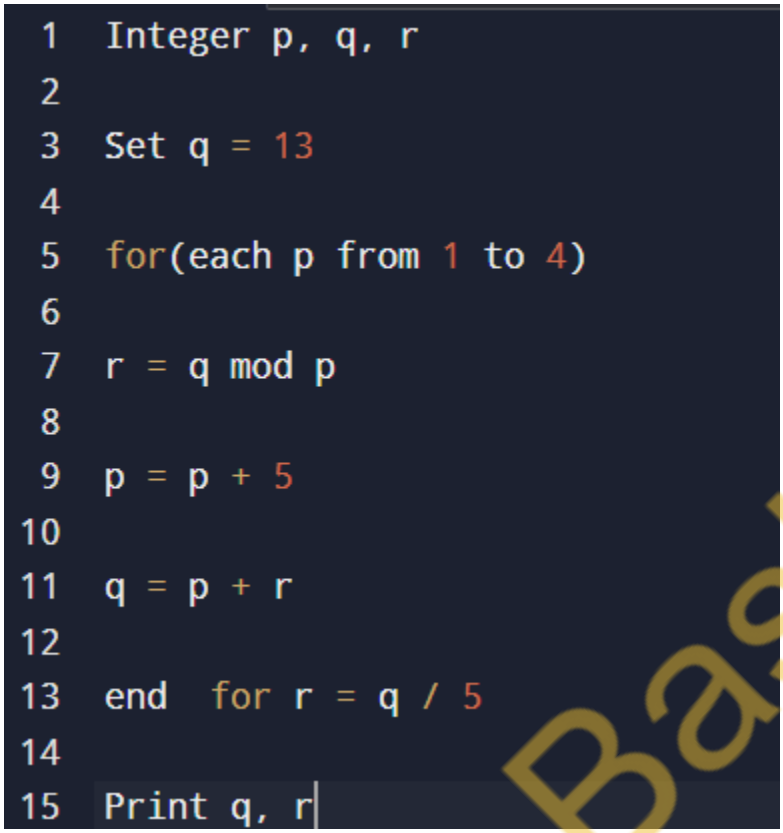

```
Integer p, q, r

Set q = 13

for(each p from 1 to 4)

r = q mod p

p = p + 5

q = p + r

end  for r = q / 5

Print q, r
```

A.6 4

B.1 3

C.7 2

D.6 1

Answer - Option D

112) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer x
2
3  Set x = 259 if(x EQUALS 0)
4
5  Print “0”
6
7  otherwise if(x MOD 9 EQUALS 0)
8
9  Print “9”
10
11 otherwise
12
13 Print x MOD 9
14
15 end if
```

A. 8

B. 16

C. 7

D. None

Answer - Option C

113) What will be the output of the following pseudocode?

Code Bashers

```
1  Integer a, b
2
3  Set a = 12, b = 25
4
5  a = (a + b) MOD 2
6
7  b = b = a
8
9  a = a + b - 13
10
11 Print a, b
```

A. -11 1

B. -12 00

C. 11 22

D. 37 24

Answer - Option A

114) What will be the output of the following pseudocode?

Code Bashers

```
1  Set a = 4, b = 4, c = 4
2
3  if (a & (b ^ b) & c)
4
5  a = a >> 1
6
7  End if
8
9  Print a + b + c
```

A.16

B.24

C.8

D.12

Answer - Option D

115) What will be the output of the following pseudocode for a = 10, b = 11?

Code Bashers

```
1  Integer funn(Integer a, Integer b)
2
3  if(0)
4
5  return a - b - funn(-7, -1)
6
7  End if
8
9  a = a + a + a + a
10
11 return a
12
13 End function funn()
```

A.40

B.30

C.44

D.0

Answer - Option A

Code Bashers