






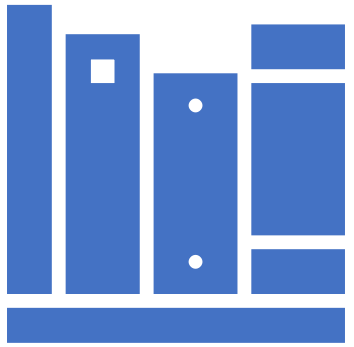

# HOW TO PREPARE FOR TCS NQT

# TCS NQT Pattern

# TCS NQT Overview

- They hire for 3 different roles –
  - Ninja (3.3 – 3.5 LPA)
  - Digital (7.0 – 7.3 LPA)
  - Prime (9.0 – 11.5 LPA)

# TCS NQT Overview

- **TCS NQT Pattern –**
  1. **Part A**: Foundation Section
     - Numerical Ability
     - Logical Reasoning
     - Verbal Ability
  2. **Part B**: Advance Section
     - Advanced Quantitative + Reasoning Ability
     - Advanced Coding

# TCS NQT Overview

**Part A – Foundation Section**

| Section | Total Questions | Duration |
|---|---|---|
| Numerical Ability | 20 | 25 min |
| Logical Reasoning | 20 | 25 min |
| Verbal Ability | 25 | 25 min |

# TCS NQT Overview

**Part B – Advanced Section**

| Section | Total Questions | Duration |
|---|---|---|
| Advanced Quantitative + Reasoning | 15 | 25 min |
| Logical Reasoning | 2 | 90 min |

# Inputs in TCS NQT

# How to take input?

1. **Size of array is given**

```
# n = 5

n = int(input("Enter size: "))
arr = []
for i in range(n):
    num = int(input())
    arr.append(num)

print("Array:", arr)
```

# How to take input?

**2. Space separated array is given**

```
# Input: 10 20 30 40

arr = list(map(int, input().split()))

print("Array:", arr)
```

# How to take input?

**3. Comma separated array is given**

```
# Input: 10 20 30 40

arr = list(map(int, input().split(‘,’)))

print("Array:", arr)
```

# How to take input?

## 4. Space separated values input

```
# Input: 2 3 (may be represents no. of rows and columns)

r, c = map(int, input().split())

print("No. of rows:", r)
print("No. of columns:", c)
```

# How to take input?

## 5. Comma separated values input

```
# Input: 2,3 (may be represents no. of rows and columns)

r, c = map(int, input().split(‘,’))

print(“No. of rows:", r)
print(“No. of columns:", c)
```