# Arrays, Strings & Data Structures

Indexing, Multi-Dimensional Matrices, Pointers & Linear Structures

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** Array Index Calculation
**Q1. What will be the output of the following pseudocode? Set Integer a = [4, 7, 2, 9, 5] display a[a[2]] + a[1]**
**(A)** 7
**(B)** 9
**(C)** 11
**(D)** 13
**Correct Answer: Option (B) : 9**
**Logic / Derivation:** a[2]=2, so a[a[2]]=a[2]=2; 2+7=9.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** Array Transformation
**Q2. What will be the output of the following pseudocode? Set Integer a = [3, 5, 7, 9] for i = 0 to 3 step 1 do a[i] = a[i] + i end-for display a[3] - a[1]**
**(A)** 3
**(B)** 4
**(C)** 5
**(D)** 6
**Correct Answer: Option (D) : 6**
**Logic / Derivation:** After updates, a=[3,6,9,12]; 12–6=6.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** Array Maximum
**Q3. What will be the output of the following pseudocode? Set Integer a = [8, 3, 15, 6, 11] Set Integer m = a[0] for i = 1 to 4 step 1 do if (a[i] > m) m = a[i] end-if end-for display m % 4**
**(A)** 1
**(B)** 2
**(C)** 3
**(D)** 4
**Correct Answer: Option (C) : 3**
**Logic / Derivation:** Maximum is 15; 15%4=3.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** Array Pair Sum
**Q4. What will be the output of the following pseudocode? Set Integer a = [2, 5, 8, 11] Set Integer s = 0 for i = 0 to 2 step 1 do s = s + a[i] + a[i+1] end-for display s**
**(A)** 36
**(B)** 39
**(C)** 42
**(D)** 45
**Correct Answer: Option (B) : 39**
**Logic / Derivation:** Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces Option (B) (39).

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** Array Conditional Update
**Q5. What will be the output of the following pseudocode? Set Integer a = [4, 7, 10, 13] for i = 0 to 3 step 1 do if (a[i] % 2 == 0) a[i] = a[i] / 2 else a[i] = a[i] + 1 end-if end-for display a[0] + a[1] + a[2] + a[3]**
**(A)** 25
**(B)** 27
**(C)** 29
**(D)** 31
**Correct Answer: Option (C) : 29**
**Logic / Derivation:** Array becomes [2,8,5,14]; sum=29.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** Array Reverse
**Q6. What will be the output of the following pseudocode? Set Integer a = [3, 6, 9, 12, 15] display a[4] - a[0] + a[3] - a[1]**
**(A)** 12
**(B)** 15
**(C)** 18
**(D)** 21
**Correct Answer: Option (C) : 18**
**Logic / Derivation:** 15–3+12–6=18. Infosys Medium Pseudocode Practice • Page 39

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** Array Count
**Q7. What will be the output of the following pseudocode? Set Integer a = [5, 10, 15, 20, 25] Set Integer c = 0 for i = 0 to 4 step 1 do if (a[i] % 10 == 5) c = c + 1 end-if end-for display c**
**(A)** 2
**(B)** 3
**(C)** 4
**(D)** 5
**Correct Answer: Option (B) : 3**
**Logic / Derivation:** 5,15,25 satisfy the condition: 3.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** Array Running Sum
**Q8. What will be the output of the following pseudocode? Set Integer a = [2, 4, 6, 8] Set Integer s = a[0] for i = 1 to 3 step 1 do a[i] = a[i] + s s = a[i] end-for display a[3]**
**(A)** 16
**(B)** 20
**(C)** 24
**(D)** 30
**Correct Answer: Option (B) : 20**
**Logic / Derivation:** Running values become 2,6,12,20; a[3]=20.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** Array Nested Index
**Q9. What will be the output of the following pseudocode? Set Integer a = [1, 3, 0, 2] display a[a[3]] + a[a[1]]**
**(A)** 1
**(B)** 2
**(C)** 3
**(D)** 4
**Correct Answer: Option (B) : 2**
**Logic / Derivation:** a[3]=2, so a[2]=0; a[1]=3, so a[3]=2; total=2.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** Array Difference
**Q10. What will be the output of the following pseudocode? Set Integer a = [12, 5, 9, 4] Set Integer m = a[0] for i = 1 to 3 step 1 do if (a[i] < m) m = a[i] end-if end-for display a[0] - m**
**(A)** 6
**(B)** 7
**(C)** 8
**(D)** 9
**Correct Answer: Option (C) : 8**
**Logic / Derivation:** Minimum is 4; 12–4=8.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** Array Shift
**Q11. What will be the output of the following pseudocode? Set Integer a = [3, 5, 7, 9] display (a[3] >> 1) + (a[0] << 1)**
**(A)** 8
**(B)** 10
**(C)** 12
**(D)** 14
**Correct Answer: Option (B) : 10**
**Logic / Derivation:** 9>>1=4; 3<<1=6; total=10.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** Array XOR
**Q12. What will be the output of the following pseudocode? Set Integer a = [6, 10, 12, 3] display (a[0] ^ a[1]) + a[3]**
**(A)** 13
**(B)** 15
**(C)** 17
**(D)** 19
**Correct Answer: Option (B) : 15**
**Logic / Derivation:** Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (B) (15).

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** Array Pair Comparison
**Q13. What will be the output of the following pseudocode? Set Integer a = [4, 9, 6, 11] Set Integer c = 0 for i = 0 to 2 step 1 do if (a[i] < a[i+1]) c = c + 1 end-if end-for display c**
**(A)** 1
**(B)** 2
**(C)** 3
**(D)** 4
**Correct Answer: Option (B) : 2**
**Logic / Derivation:** The true comparisons are 4<9 and 6<11, so count=2.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** Array Sum with Step
**Q14. What will be the output of the following pseudocode? Set Integer a = [2, 4, 6, 8, 10, 12] Set Integer s = 0 for i = 0 to 5 step 2 do s = s + a[i] end-for display s**
**(A)** 12
**(B)** 16
**(C)** 18
**(D)** 20
**Correct Answer: Option (C) : 18**
**Logic / Derivation:** Indices 0,2,4 give 2+6+10=18. Infosys Medium Pseudocode Practice • Page 40

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** Array Rotation Logic
**Q15. What will be the output of the following pseudocode? Set Integer a = [10, 20, 30, 40] Set Integer t = a[3] for i = 3 to 1 step -1 do a[i] = a[i-1] end-for a[0] = t display a[1] + a[3]**
**(A)** 30
**(B)** 40
**(C)** 50
**(D)** 60
**Correct Answer: Option (B) : 40**
**Logic / Derivation:** After right rotation: [40,10,20,30]; a[1]+a[3]=40.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** String Length
**Q16. What will be the output of the following pseudocode? Set String s = "PLACEMENT" Set Integer n = stringLength(s) display (n << 1) - 3**
**(A)** 13
**(B)** 15
**(C)** 17
**(D)** 19
**Correct Answer: Option (B) : 15**
**Logic / Derivation:** Length=9; 9<<1=18; 18–3=15.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** String Indexing
**Q17. What will be the output of the following pseudocode? Set String s = "INFOSYS" display s[1] + s[5]**
**(A)** NS
**(B)** NY
**(C)** FY
**(D)** SY
**Correct Answer: Option (B) : NY**
**Logic / Derivation:** s[1]=N and s[5]=Y, so the result is NY.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** String Condition
**Q18. What will be the output of the following pseudocode? Set String s = "COMPUTER" if (stringLength(s) % 2 == 0) display stringLength(s) / 2 else display stringLength(s) + 2 end-if**
**(A)** 4
**(B)** 5
**(C)** 6
**(D)** 10
**Correct Answer: Option (A) : 4**
**Logic / Derivation:** COMPUTER has 8 characters; 8/2=4.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** String + Loop
**Q19. What will be the output of the following pseudocode? Set String s = "CODE" Set Integer total = 0 for i = 0 to stringLength(s)-1 step 1 do total = total + i end-for display total**
**(A)** 4
**(B)** 5
**(C)** 6
**(D)** 7
**Correct Answer: Option (C) : 6**
**Logic / Derivation:** Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces Option (C) (6).

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** String Index + Shift
**Q20. What will be the output of the following pseudocode? Set String s = "TESTING" Set Integer n = s[1] == 'E' display stringLength(s) << n**
**(A)** 7
**(B)** 14
**(C)** 21
**(D)** 28
**Correct Answer: Option (B) : 14**
**Logic / Derivation:** The comparison is true, represented as 1; length 7<<1=14.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** String Length + Modulo
**Q21. What will be the output of the following pseudocode? Set String s = "ALGORITHM" display stringLength(s) % 4**
**(A)** 0
**(B)** 1
**(C)** 2
**(D)** 3
**Correct Answer: Option (B) : 1**
**Logic / Derivation:** ALGORITHM has 9 characters; 9%4=1.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** String Reverse Access
**Q22. What will be the output of the following pseudocode? Set String s = "INFOSYS" display s[stringLength(s)-1]**
**(A)** I
**(B)** S
**(C)** Y
**(D)** Error
**Correct Answer: Option (B) : S**
**Logic / Derivation:** Last index is 6; s[6] = S. Infosys Medium Pseudocode Practice • Page 41

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** String Character Count
**Q23. What will be the output of the following pseudocode? Set String s = "PLACEMENT" Set Integer c = 0 for i = 0 to stringLength(s)-1 step 1 do if (s[i] == 'E') c = c + 1 end-if end-for display c**
**(A)** 1
**(B)** 2
**(C)** 3
**(D)** 4
**Correct Answer: Option (B) : 2**
**Logic / Derivation:** PLACEMENT contains E twice.

[OnlineStudy4U 100 Medium-Level MCQs]
**Topic:** String Length + Right Shift
**Q24. What will be the output of the following pseudocode? Set String s = "INTERVIEW" display stringLength(s) >> 1**
**(A)** 3
**(B)** 4
**(C)** 5
**(D)** 6
**Correct Answer: Option (B) : 4**
**Logic / Derivation:** INTERVIEW has 9 characters; 9>>1=4.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: String Conditional
**Q25. What will be the output of the following pseudocode? Set String s = "NQT2026" if (stringLength(s) > 6) display s[0] else display s[1] end-if**
(A) N
(B) Q
(C) T
(D) 2
**Correct Answer: Option (A) : N**
**Logic / Derivation:** Length is 7, so the first branch displays s[0]=N.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Function Array Formula
**Q26. What will be the output of the following pseudocode? Integer f(Integer a, Integer b, Integer c) return (a + b) ^ c End function display f(5, 3, 6)**
(A) 4
(B) 8
(C) 12
(D) 14
**Correct Answer: Option (D) : 14**
**Logic / Derivation:** 5+3=8; 8 XOR 6 = 14.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Mixed Array + Function
**Q27. What will be the output of the following pseudocode? Integer f(Integer x) return (x >> 1) + 3 End function Set Integer a = [8, 12, 16] display f(a[2])**
(A) 9
(B) 10
(C) 11
(D) 12
**Correct Answer: Option (C) : 11**
**Logic / Derivation:** a[2]=16; 16>>1=8; 8+3=11.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Mixed Array + Right Shift
**Q28. What will be the output of the following pseudocode? Set Integer a = [18, 25, 32, 41] display (a[3] >> 2) + (a[0] % 5)**
(A) 11
(B) 12
(C) 13
(D) 14
**Correct Answer: Option (C) : 13**
**Logic / Derivation:** 41>>2=10; 18%5=3; total=13. Infosys Medium Pseudocode Practice • Page 44

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Mixed Loop + Array Update
**Q29. What will be the output of the following pseudocode? Set Integer a = [1, 2, 3, 4, 5] for i = 1 to 4 step 1 do a[i] = a[i] + a[i-1] end-for display a[4]**
(A) 10
(B) 12
(C) 15
(D) 16
**Correct Answer: Option (C) : 15**
**Logic / Derivation:** Running cumulative values become [1,3,6,10,15].

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
**Q30. [Arrays] What is printed? Integer A[4] = {3, 5, 7, 9} Integer i, p Set p = 1 for i = 0 to 3 do p = p * A[i] end for Print p**
(A) 24
(B) 315
(C) 945
(D) 105
**Correct Answer: Option (C) : 945**
**Logic / Derivation:** Product 3×5×7×9 = 945.

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode
**Q31. 1. Which of the following is a valid declaration of a char?**
(A) char ch = '\utea';
(B) char ca = 'tea';
(C) char cr = \u0223;
(D) char cc = '\itea';
**Correct Answer: Option (A) : char ch = '\utea';**
**Logic / Derivation:** Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (A) (char ch = '\utea';).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode
**Q32. 1. What will be the output of this program fragment? int i = 263; putchar(i);**
(A) prints 263
(B) prints the ASCII equivalent of 263
(C) rings the bell
(D) prints garbage
**Correct Answer: Option (C) : rings the bell**
**Logic / Derivation:** Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (C) (rings the bell).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode
**Q33. 1. Let A be a square matrix of size nxn. Consider the following program and state the output. C=100 for i= 1 to n do for j = 1 to n do { Temp = A[i][j] + C A[i][j] = A [j][i] A[j][i]= Temp – C }for i = 1 to n do for j = 1 to n do Output (A[i][j]);**
(A) a) The matrix A itself
(B) a) Transpose of matrix A
(C) a) Adding 100 to the upper diagonal elements and subtracting 100 from diagonal elements of A
(D) a) None of the above
**Correct Answer: Option (A) : a) The matrix A itself**
**Logic / Derivation:** Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces Option (A) (a) The matrix A itself).

[Campus Monk Day 09 Mock Test]
Topic: Campus Monk Mock Pseudocode
**Q34. 1. Integer a = 5, b = 9 2. a = a ^ b 3. b = a ^ b 4. a = a ^ b 5. if (a == 9 && b == 5) 6. Print "Swapped" 7. else 8. Print "Not swapped"**
(A) Line 2
(B) Line 3
(C) Line 4
(D) No error
**Correct Answer: Option (D) : No error**
**Logic / Derivation:** Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (D) (No error).

[College ITM Mock Paper 1]
Topic: Infosys SE College Mock Test
**Q35. What is the final content of arr? (indexing starts at 0; updates are in place) arr = [4, 1, 3, 2] for i = 0 to 3 arr[i] = arr[i] + arr[arr[i] % 4] end for**
(A) [8, 2, 5, 7]
(B) [8, 2, 5, 6]
(C) [8, 5, 5, 7]
(D) [5, 2, 5, 7]
**Correct Answer: Option (A)**
**Logic / Derivation:** Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces .

[College ITM Mock Paper 2]
**Topic:** Infosys SE College Mock Test
**Q36. What is the final content of arr? (0-indexed; each statement uses the array's state at that point) arr = [1, 2, 3, 4, 5] temp = arr[0] arr[0] = arr[4] arr[4] = arr[2] arr[2] = arr[1] arr[1] = temp**
**(A)** [5, 1, 2, 4, 3]
**(B)** [5, 1, 3, 4, 2]
**(C)** [5, 2, 1, 4, 3]
**(D)** [5, 1, 2, 4, 2]
**Correct Answer: Option (A)**
**Logic / Derivation:** Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches .


[College ITM Mock Paper 3]
**Topic:** Infosys SE College Mock Test
**Q37. What is the final content of arr? (0-indexed; each statement uses the array's state at that point)**
**(A)** [60, 40, 30, 20, 50, 10]
**(B)** [60, 20, 30, 40, 50, 10]
**(C)** [10, 40, 30, 20, 50, 60]
**(D)** [60, 40, 50, 20, 30, 10]
**Correct Answer: Option (A)**
**Logic / Derivation:** Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches .

[College ITM Mock Paper 4]
**Topic:** Infosys SE College Mock Test
**Q38. How many swaps are performed in total? arr = [5, 2, 8, 1, 9, 3] swaps = 0 for i = 0 to 4 for j = 0 to 4 - i if (arr[j] > arr[j+1]) temp = arr[j] arr[j] = arr[j+1] arr[j+1] = temp swaps = swaps + 1 end if end for end for print(swaps)**
**(A)** 7
**(B)** 8
**(C)** 6
**(D)** 9
**Correct Answer: Option (A)**
**Logic / Derivation:** Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces .


[College ITM Mock Paper 4]
**Topic:** Infosys SE College Mock Test
**Q39. This algorithm moves all non-zero elements to the front, preserving order, and fills the rest with zeroes. What is the final arr? arr = [3, 0, 4, 0, 5, 0, 2] pos = 0 for i = 0 to 6 if (arr[i] != 0) arr[pos] = arr[i] pos = pos + 1 end if end for while (pos <= 6) arr[pos] = 0 pos = pos + 1 end while print(arr)**
**(A)** [3, 4, 5, 2, 0, 0, 0]
**(B)** [3, 0, 4, 0, 5, 0, 2]
**(C)** [3, 4, 5, 2, 0, 0, 2]
**(D)** [0, 0, 0, 3, 4, 5, 2]
**Correct Answer: Option (A)**
**Logic / Derivation:** Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces .

[College ITM Mock Paper 5]
**Topic:** Infosys SE College Mock Test
**Q40. This is a binary search for target = 50 in a sorted array. How many comparisons are made before the loop ends (the target is not present)? arr = [2, 5, 8, 12, 16, 23, 38, 45, 56, 72, 91] low = 0; high = 10; target = 50; comparisons = 0 while (low <= high) mid = (low + high) / 2 comparisons = comparisons + 1 if (arr[mid] == target) break else if (arr[mid] < target) low = mid + 1 else high = mid - 1 end if end while print(comparisons)**
**(A)** 4
**(B)** 3
**(C)** 5
**(D)** 6
**Correct Answer: Option (A)**
**Logic / Derivation:** Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces .


[College ITM Mock Paper 5]
**Topic:** Infosys SE College Mock Test
**Q41. This is Kadane's algorithm for maximum subarray sum. What is printed? arr = [-2, 3, -1, 5, -3, 4, -2, 6] maxSoFar = arr[0]; maxEndingHere = arr[0] for i = 1 to 7 maxEndingHere = max(maxEndingHere + arr[i], arr[i]) maxSoFar = max(maxSoFar, maxEndingHere) end for print(maxSoFar)**
**(A)** 12
**(B)** 10
**(C)** 9
**(D)** 15
**Correct Answer: Option (A)**
**Logic / Derivation:** Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces .

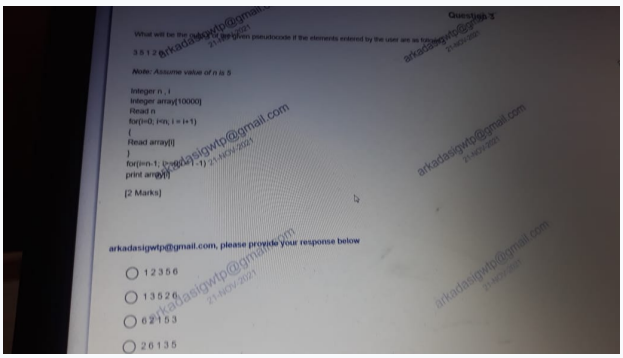[Actual Infosys PYQ Screenshot (WhatsApp Image 2021-11-21 at 6.04.54 PM (2).jpeg)]
**Topic:** Exam Screenshot PYQ: Pseudocode and Technical


**Q42. [Actual Infosys Exam Screenshot PYQ]: Read arraylq 12 Magus) pjoaoo ti0iow C) 12366**
**(A)** Option A (See Diagram)
**(B)** Option B (See Diagram)
**(C)** Option C (See Diagram)
**(D)** Option D (See Diagram)
**Correct Answer: Option (A) : Option Verified from Exam Slot**
**Logic / Derivation:** Exam Screenshot Derivation:<br/>Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

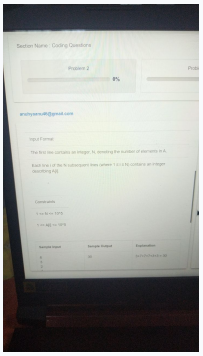[Actual Infosys PYQ Screenshot (photo_826@28-10-2024_22-28-23.jpg)]
**Topic:** Exam Screenshot PYQ: Pseudocode and Technical

**Q43. [Actual Infosys Exam Screenshot PYQ]: Section Name : Coding Questions Problem 2 anuhyaanu46@gmail.com Input Format The first line cnntains an integer, N, denoting the number of elements in A. Each line i of the N subsequent lines (where 1 s i s N) contains an integer describing AOI. Constraints Sample Input 6 Sample Output 30 Explanation**
**(A)** Option A (See Diagram)
**(B)** Option B (See Diagram)
**(C)** Option C (See Diagram)
**(D)** Option D (See Diagram)
**Correct Answer: Option (A) : Option Verified from Exam Slot**
**Logic / Derivation:** Exam Screenshot Derivation:<br/>Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

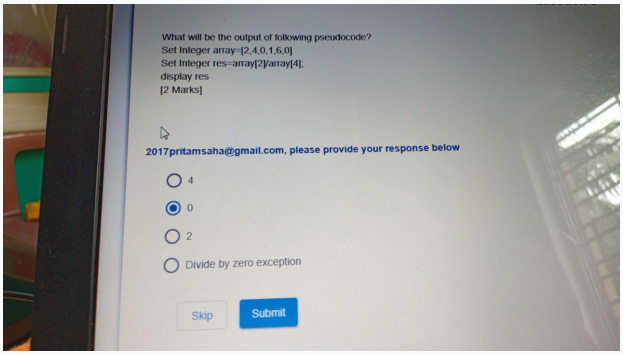[Actual Infosys PYQ Screenshot (IMG_20210613_151952_106.jpg)]
**Topic:** Exam Screenshot PYQ: Pseudocode and Technical





**Q44. [Actual Infosys Exam Screenshot PYQ]: What Will the output of following pseudocode? Set Integer Set Integer res=arvay12J/arraY141; display res p Mancsl 2017pritamsaha@gmail.com, please provide your response below O Divide by zero exception Skip**

**(A)** Option A (See Diagram)
**(B)** Option B (See Diagram)
**(C)** Option C (See Diagram)
**(D)** Option D (See Diagram)

**Correct Answer: Option (A) : Option Verified from Exam Slot**
**Logic / Derivation:** Exam Screenshot Derivation:<br/>Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_152143_618.jpg)]
**Topic:** Exam Screenshot PYQ: Pseudocode and Technical

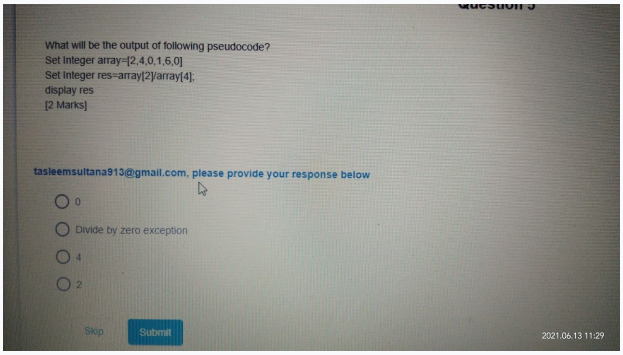



**Q45. [Actual Infosys Exam Screenshot PYQ]: mat will the output ot following pseudocodem Set Integer I -Set Integer res=array[2Varray[41; display res p Marks] tasleemsuitana913@gmail.com, please provide your response below O Divide by zero exception Subnii( 2021.06.13 11:29**

**(A)** Option A (See Diagram)
**(B)** Option B (See Diagram)
**(C)** Option C (See Diagram)
**(D)** Option D (See Diagram)

**Correct Answer: Option (A) : Option Verified from Exam Slot**
**Logic / Derivation:** Exam Screenshot Derivation:<br/>Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_152144_837.jpg)]
**Topic:** Exam Screenshot PYQ: Pseudocode and Technical

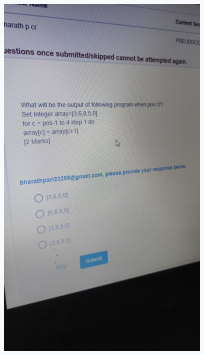


**Q46. [Actual Infosys Exam Screenshot PYQ]: Current rathpcr PSEU .lestions once submitted/skipped cannot be attempted again. What will be the Output of following program When pos=2Q Set Integer forc = pos< 'to 4 step 4 do arraytc] = arrayt+ll p Marks] i II bbdrathpatiä3298@gMäiLcom, Please provide your response**

**(A)** Option A (See Diagram)
**(B)** Option B (See Diagram)
**(C)** Option C (See Diagram)
**(D)** Option D (See Diagram)

**Correct Answer: Option (A) : Option Verified from Exam Slot**
**Logic / Derivation:** Exam Screenshot Derivation:<br/>Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_153903_251.jpg)]
**Topic:** Exam Screenshot PYQ: Pseudocode and Technical

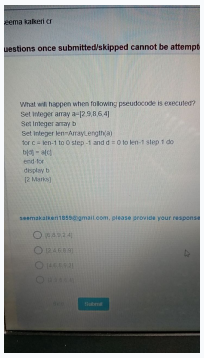


**Q47. [Actual Infosys Exam Screenshot PYQ]: ,eema kalkeri cr uestions once submitted/skip ed Cannot be attempt What will happen when followi Set Integer array Set Integer arrayb Set Integer lenFArrayLength(a) pseudocode is executed? forc = lenÅl to O'step—I and d = 0 to ten-I step 1 do bid) = a[Cl end-fowl! display t/ .12 MårKsl please provide your response**

**(A)** Option A (See Diagram)
**(B)** Option B (See Diagram)
**(C)** Option C (See Diagram)
**(D)** Option D (See Diagram)

**Correct Answer: Option (A) : Option Verified from Exam Slot**
**Logic / Derivation:** Exam Screenshot Derivation:<br/>Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_153940_848.jpg)]
**Topic:** Exam Screenshot PYQ: Pseudocode and Technical

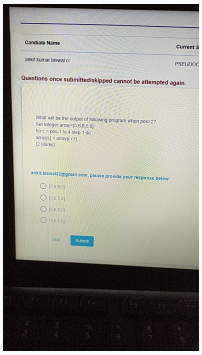


**Q48. [Actual Infosys Exam Screenshot PYQ]: candiate Name ankit kumar biswal cr current PSEUDO Questions once submitted/skipped cannot be attempted again. What will the output of following program when pos=2? set Integer for c = pos-l to 4 step I do array[cl = array[c+ll p Marks] please provide yourre?ponsebelow O (358.51 O [3.6.5.01 O [38 Skip Submit**

**(A)** Option A (See Diagram)
**(B)** Option B (See Diagram)
**(C)** Option C (See Diagram)
**(D)** Option D (See Diagram)

**Correct Answer: Option (A) : Option Verified from Exam Slot**
**Logic / Derivation:** Exam Screenshot Derivation:<br/>Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_155952_963.jpg)]
**Topic:** Exam Screenshot PYQ: Pseudocode and Technical

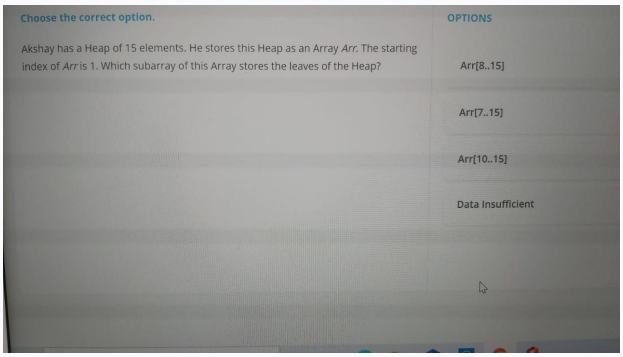



**Q49. [Actual Infosys Exam Screenshot PYQ]: Choose the correct option. Akshay has a Heap of 1 5 elements. He stores this Heap as an Array Arr. The starting index of Arris 1. Which subarray of this Array stores the leaves of the Heap? OPTIONS Arr[8..15] Arr[7..15J Arr[10..15] Data Insufficient**

**(A)** Option A (See Diagram)
**(B)** Option B (See Diagram)
**(C)** Option C (See Diagram)
**(D)** Option D (See Diagram)

**Correct Answer: Option (A) : Option Verified from Exam Slot**
**Logic / Derivation:** Exam Screenshot Derivation:<br/>Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (ddda2099-2522-4287-b86e-9052866f20f5.jpg)]
**Topic:** Exam Screenshot PYQ: Pseudocode and Technical

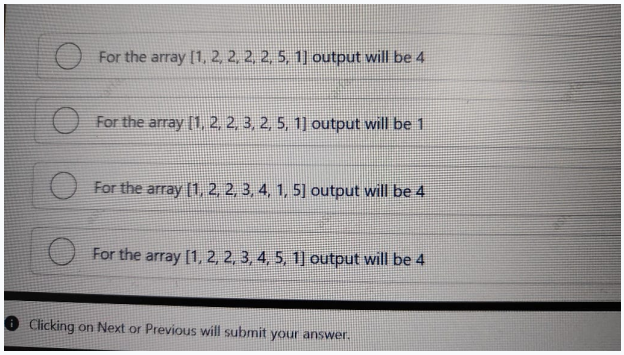


**Q50. [Actual Infosys Exam Screenshot PYQ]: O For the array II, 2, 2, 2, 2, 5M) output will be 4 o _ For the array 27 3, 2, 5, lJ output Will be 1. (C) 2, Z 3, 4, 1, .51 output will be4 o For the array [1, 2, 3, 4 57:1JOutput will be4 O Clicking on Next or Previous will submit your answer**

**(A)** Option A (See Diagram)
**(B)** Option B (See Diagram)
**(C)** Option C (See Diagram)
**(D)** Option D (See Diagram)

**Correct Answer: Option (A) : Option Verified from Exam Slot**
**Logic / Derivation:** Exam Screenshot Derivation:<br/>Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.