


Logical model contents

- **Entities** represent business concepts:
 - They are composed of **attributes**, which use built-in or custom data types (**user-defined types**, **complex types** and **list of values**)
 - They are related with **reference relationships**
- **Rules** apply to these entities
 - **Enrichers** to transform and standardize data
 - **Validations** to enforce data quality
 - **Matcher** to match and merge duplicate records
 - **Survivorship rules** to consolidate golden values
 - **Model privilege grants** to secure data access
- **Applications** for business-users and data stewards

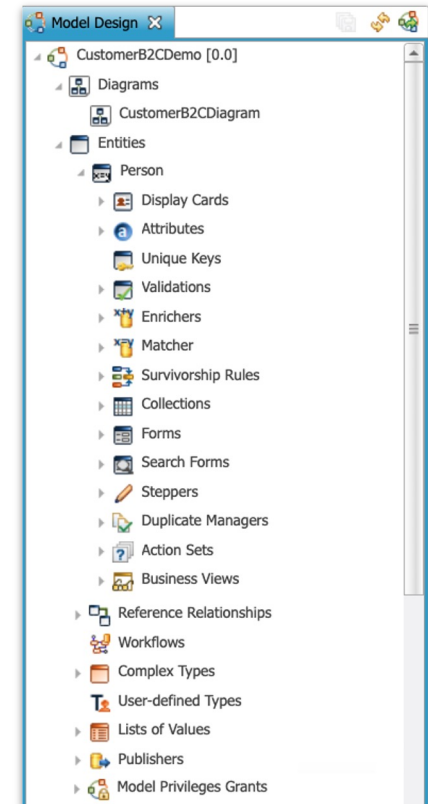

Application components **business views, actions, steppers, duplicate managers, workflows**, etc are covered later in the training

Naming convention

- Use a single naming convention for object **Names**
- Use CamelCase + InitCap
 - E.g. CustomerName, ProductPartNumber
 - Not Customer_Name, Product_Part_Number
 - Not customer_name, product_part_number
 - Not customer name, Product Part Number
- Suffix object names with the object type (except for entities & attributes)
 - E.g. *SimpleAddressType*, *GenderLOV*, *CountryLOV*, *ZipcodeType*
- Why?
 - The application builder auto-generates labels from camel-cased names
 - Simplify object identification: *CountryLOV* vs. *Country* attribute.
 - Names appear in error and validation messages: good naming means easy troubleshooting



Modeling


Data types



Built-in types

Built-in types are provided out of the box in the platform and include:

- Numeric
 - BigInteger, ShortInteger, Integer, LongInteger, Decimal
- Text
 - String, LongText
- Date
 - Date, Timestamp
- Binary
 - Binary: Store any type of binary content
- Misc.
 - UUID, Boolean

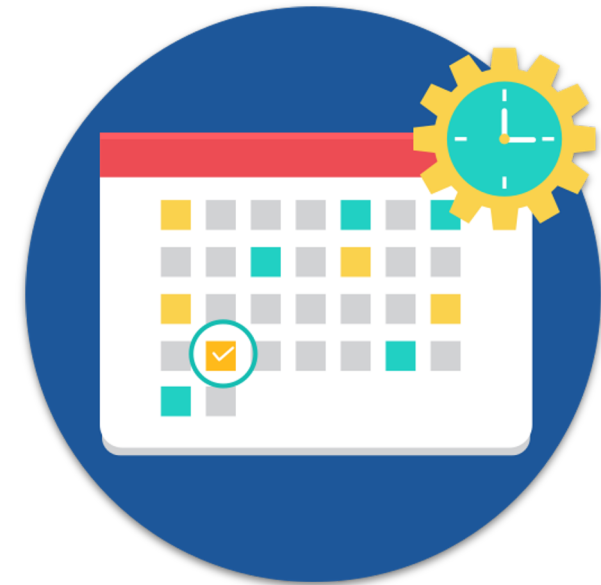

Custom data types

- **List of values (LOVs)**

- User-defined list of codes with associated labels and pictures
- Supports value range validation and multi-value LOVs
- Limited to 1,000 entries, importable from Excel
- E.g.: *GenderLOV* (M:Male, F:Female), *VendorStatusLOV* (OK:Active, KO:Inactive)

- **User-defined types**

- Specialization of a built-in type
- E.g.: *ZipcodeType* = String(5), *URLType* = String(2000)

List of Values: CommunicationType

CustomerB2CDemo CommunicationType

Details

Auto Fill: ☐

Name: CommunicationType

Label: Communication Type

Description:

Details

Length: 128

Values

Code	Label	Image
EMAIL	Email	
MAILING	Mailing	
PHONE	Phone	

Complex types

Complex types are a customized composite type composed of several **definition attributes** using built-in type, user-defined type or a list of Values.

- Requires a display name
- Validation rules (mandatory) can apply to the definition attribute
- E.g.: *AddressType* is composed of: *AddressLine*, *ZipCode*, *City* and *Country* (mandatory).

[illegible]