





Enriching and Validating Data

Enrichers

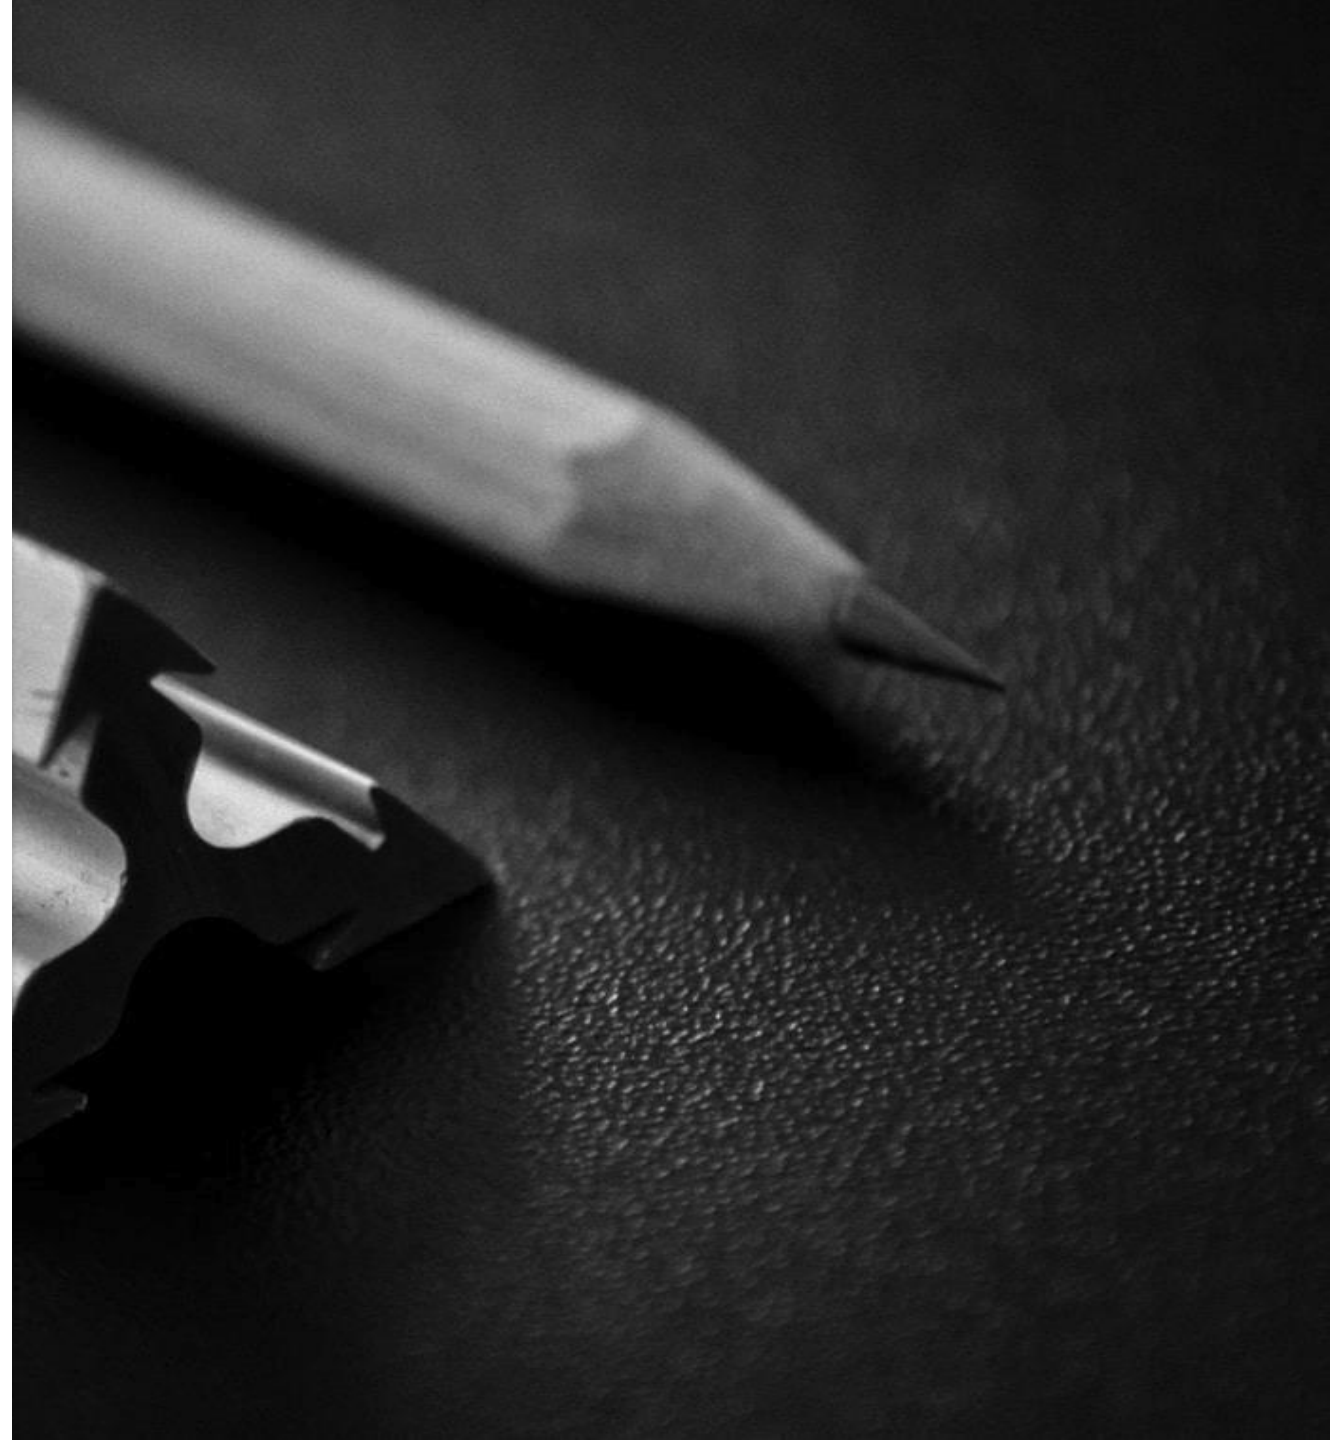

Enrichers

- Normalize, standardize and enrich attribute values
- Can be used during **Pre-consolidation** and **Post-consolidation** to:
 - Improve data quality
 - Normalize data for matching
- 3 types:
 - **SemQL** language
 - **Java Plug-in**
 - **REST Client**

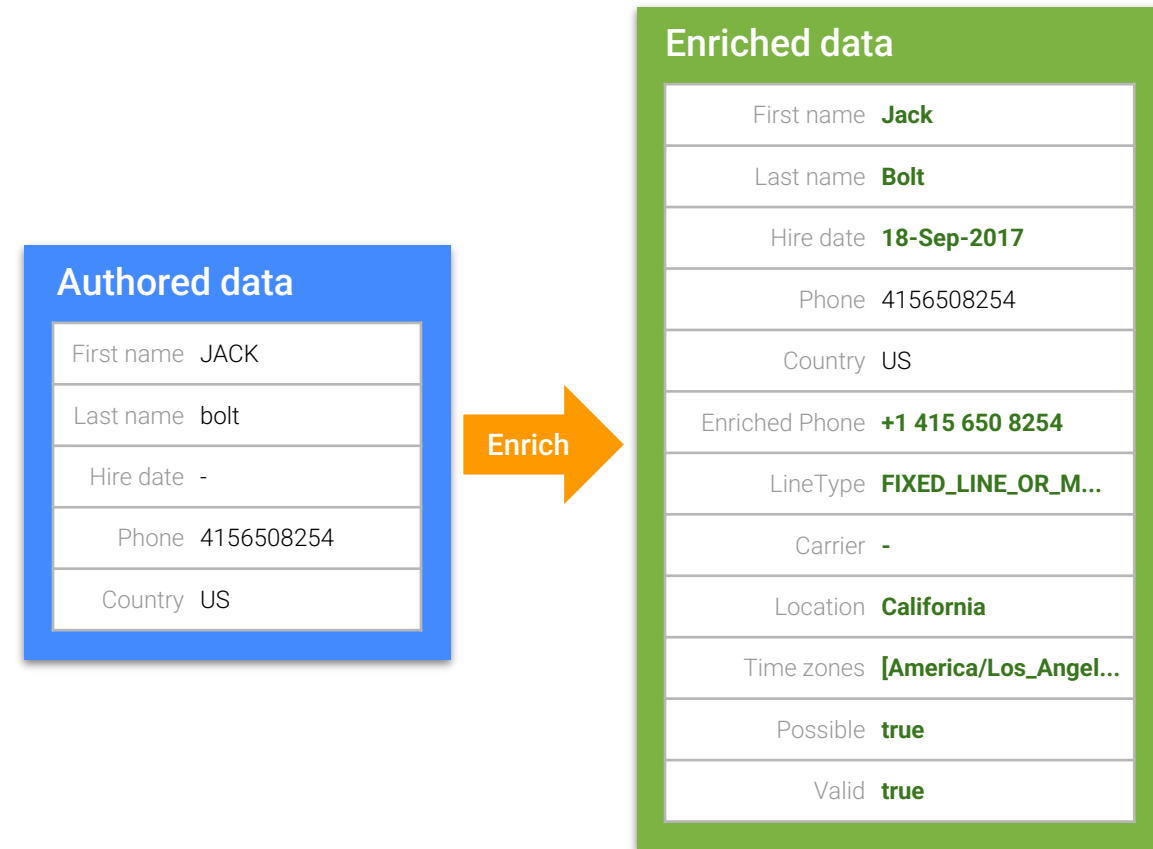

Enricher - SemQL

Enricher Expressions return a **modified value**

StandardizedName: UPPER(CustomerName)

▼ Enricher Expressions

	Attribute Name	Expression
f(x)	StandardizedName	UPPER(CustomerName)

Enricher – Java Plug-in

A **Plug-in** can be a **Java** program

- Plug-ins take **Inputs** (mapped on attributes) and **Parameters**
- Enricher Plug-ins return **Outputs** (mapped on attributes to enrich)
- Validation Plug-ins return a **boolean** value indicating whether the values of the input are valid

Offer wider possibilities than SemQL

- **Enricher**: Geocoding using an external API (Google, OpenStreetMap etc.)
- **Validation**: Pattern Matching, Email Validator, Phone Validator



Guide: <https://www.semarchy.com/doc/semarchy-xdm/xdm/2023.2/Plugins/develop/overview.html>

Enricher - REST Clients

Generic REST Client:

- **Enricher** Plug-in
- **Zero code** needed
- Compatible with **any REST APIs** supporting JSON (Google, Melissa etc.)
- Accept SemQL as **Inputs**
- Use **JSONPath** to parse the API response
- **Enricher Cache** can be activated to minimize cost and performances issues

