

[Home](#)

[About Us](#)

[Content](#)

[Contact Us](#)

All
About
Pizza!



PIZZA

A Delicious Journey

Pizza sales data analysis

SQL project report


Objective:-

Analyze pizza sales
data to drive business
insights using SQL




Table structure and relationship

pizza types	
	pizza_type_id
	name
	category
	ingredients

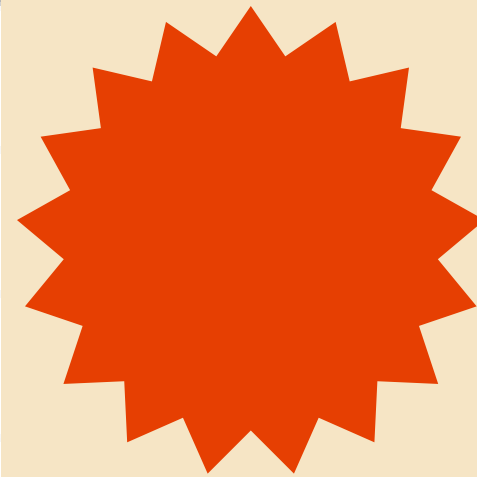

pizzas	
	pizza_id
	pizza_type_id
	size
	price

order details	
	order_details_id
	order_id
	pizza_id
	quantity

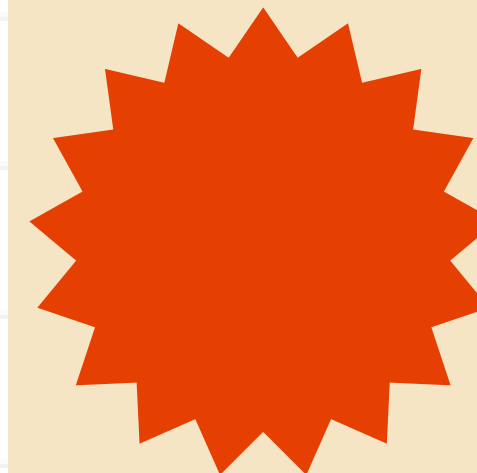

orders	
	order_id
	date
	time

Q1) Retrieve the total number of orders placed.

Query) select count(order_id) as
total_orders from orders

Response).

 Results  Messages	
	total_orders
1	21350

Q2) Calculate the total revenue generated from pizza sales.

```
select round(sum(order_details.quantity * pizzas.price),2) as total_revenue
from
order_details join pizzas
on
order_details.pizza_id = pizzas.pizza_id
```

Response)

	total_revenue
1	817860.05

Q3) Identify the highest-priced pizza.

```
select top 1 pizza_types.name, pizzas.price from  
pizza_types join pizzas on  
pizza_types.pizza_type_id = pizzas.pizza_type_id  
order by pizzas.price desc
```

Response).

	name	price
1	The Greek Pizza	35.9500007629395

Q4) Identify the most common pizza size ordered.

```
select pizzas.size, count(order_details.order_details_id) as total_qty
from pizzas join order_details
on
pizzas.pizza_id = order_details.pizza_id
group by pizzas.size
order by total_qty desc
```

Response)

	size	total_qty
1	L	18526
2	M	15385
3	S	14137
4	XL	544
5	XXL	28

Q5) List the top 5 most ordered pizza types along with their quantities.

```
select top 5 pizza_types.name,  
sum(order_details.quantity) as total_qty  
from pizza_types join pizzas on  
pizza_types.pizza_type_id = pizzas.pizza_type_id  
join order_details  
on order_details.pizza_id = pizzas.pizza_id  
group by pizza_types.name  
order by total_qty desc
```

Response).

	name	total_qty
1	The Classic Deluxe Pizza	2453
2	The Barbecue Chicken Pizza	2432
3	The Hawaiian Pizza	2422
4	The Pepperoni Pizza	2418
5	The Thai Chicken Pizza	2371

Q6) The necessary tables to find the total quantity of each pizza category ordered.

```
select pizza_types.category,  
sum(order_details.quantity) as quantity  
from pizza_types join pizzas  
on pizza_types.pizza_type_id = pizzas.pizza_type_id  
join order_details  
on pizzas.pizza_id = order_details.pizza_id  
group by pizza_types.category  
order by quantity desc ;
```

Response)

	category	quantity
1	Classic	14888
2	Supreme	11987
3	Veggie	11649
4	Chicken	11050

Q7) Determine the distribution of orders by hour of the day.

```
select datepart(hour, time) as hours, count(order_id) as order_count from orders  
group by datepart(hour, time)  
order by hours
```

Response).

	hours	order_count
1	9	1
2	10	8
3	11	1231
4	12	2520
5	13	2455

Q8) Join relevant tables to find the category-wise distribution of pizzas.

```
select category, count(name) as total from pizza_types  
group by category;
```

Response)

	category	total
1	Chicken	6
2	Classic	8
3	Supreme	9
4	Veggie	9

Q9) Group the orders by date and calculate the average number of pizzas ordered per day.

```
select avg(quantity) as avg_quantity from  
(select orders.date, sum(order_details.quantity) as quantity  
from orders join order_details on  
orders.order_id = order_details.order_id  
group by orders.date) as order_qty;
```

Response).

	avg_quantity
1	138

Q10) Determine the top 3 most ordered pizza types based on revenue.

```
select top 3 pizza_types.name, sum(order_details.quantity*pizzas.price) as total_amount
from pizza_types join pizzas on
pizza_types.pizza_type_id = pizzas.pizza_type_id
join order_details on
order_details.pizza_id = pizzas.pizza_id
group by pizza_types.name
order by total_amount desc;
```

Response)

	name	total_amount
1	The Thai Chicken Pizza	43434.25
2	The Barbecue Chicken Pizza	42768
3	The California Chicken Pizza	41409.5

ORDER NOW!



+123-456-7890



www.reallygreatsite.com



hello@reallygreatsite.com



THANK YOU

