

2025UCP1735 - SHIVANG THAKUR

I am using Windows Subsystem for Linux to emulate a Linux like environment.


Step 0: Initialized project directory

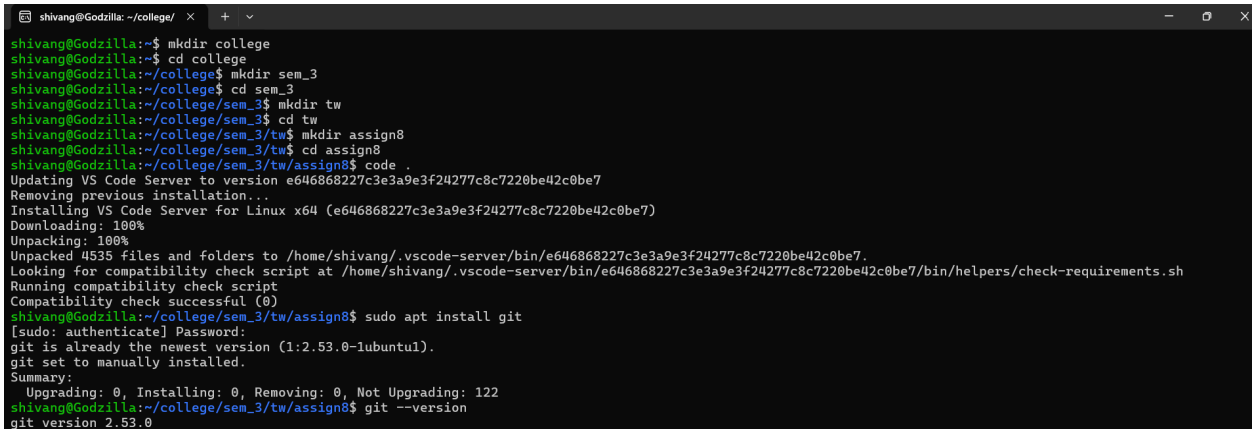


Step 1 and 2: Used git init to initialize git repository and configured the email and the username.

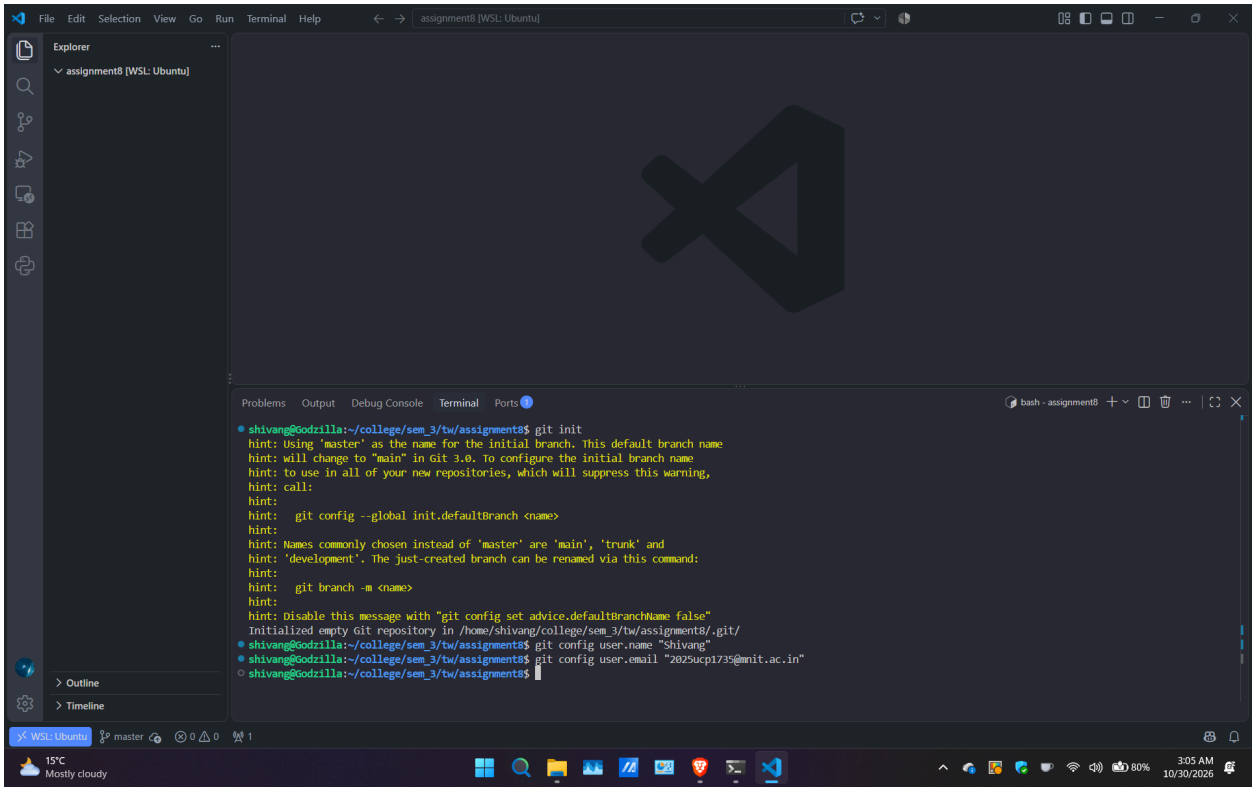


Step 3: Made the readme.txt file and added it to the staging area. Also then checked the working tree using git status.

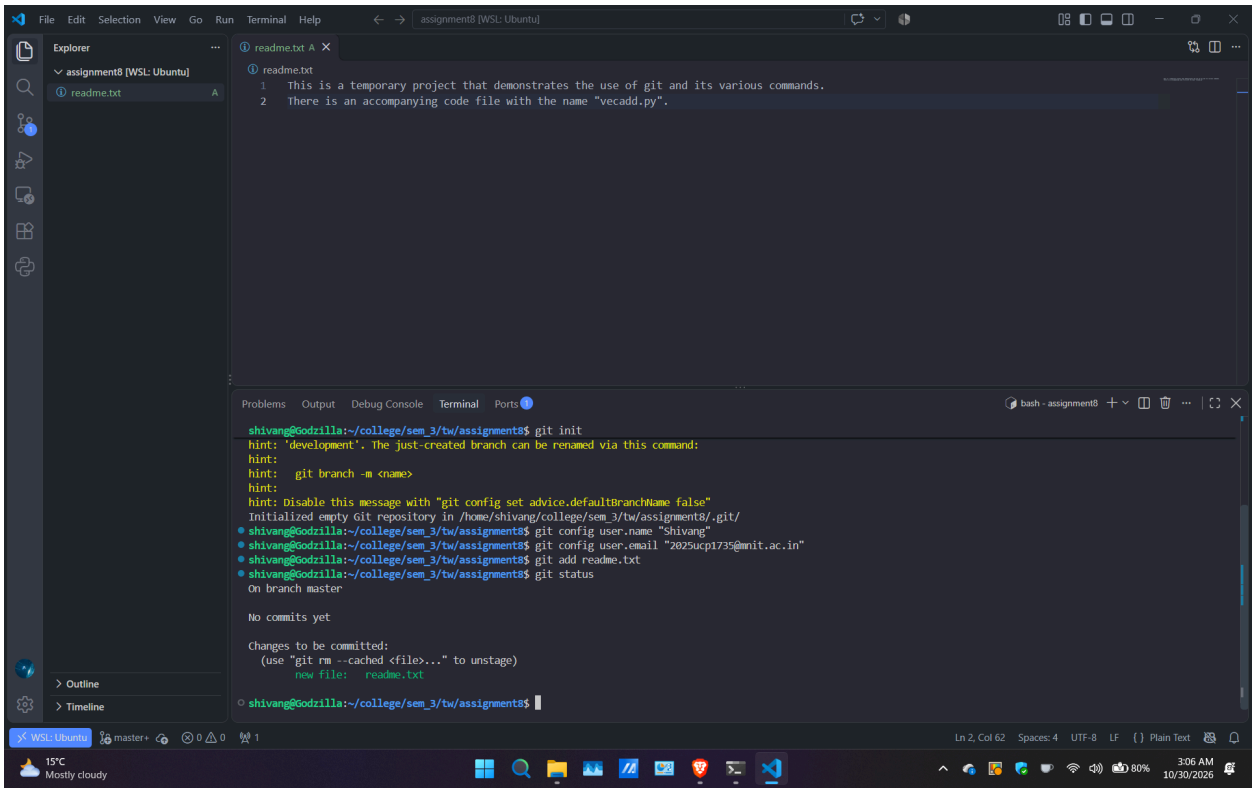


Step 4 and 5: Make the initial commit. Then again check status. Then added a new line and checked git diff.

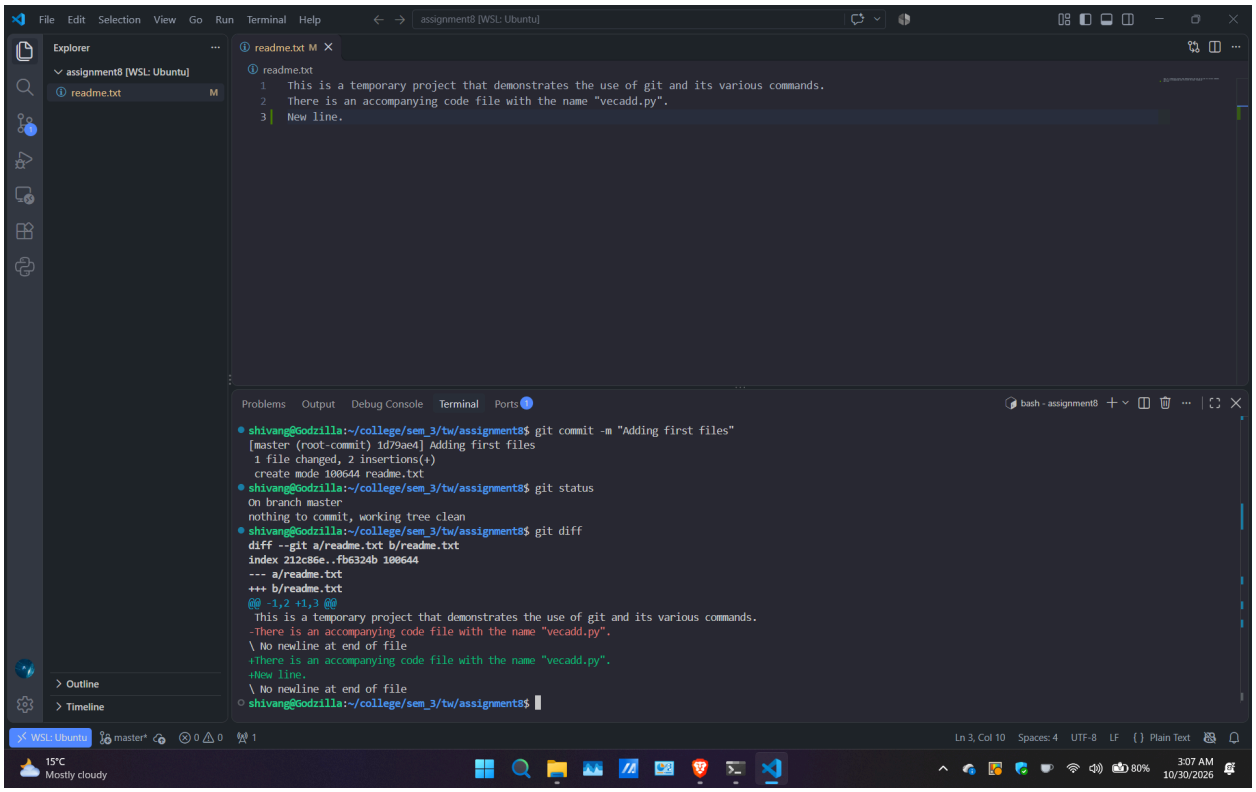


Step 6: Tried the restore command. If no changes are staged yet, git restore will restore to the commit without any problems as seen just below. But if the changes are staged we need to do git restore –staged –worktree to actually revert back as seen in the next picture.

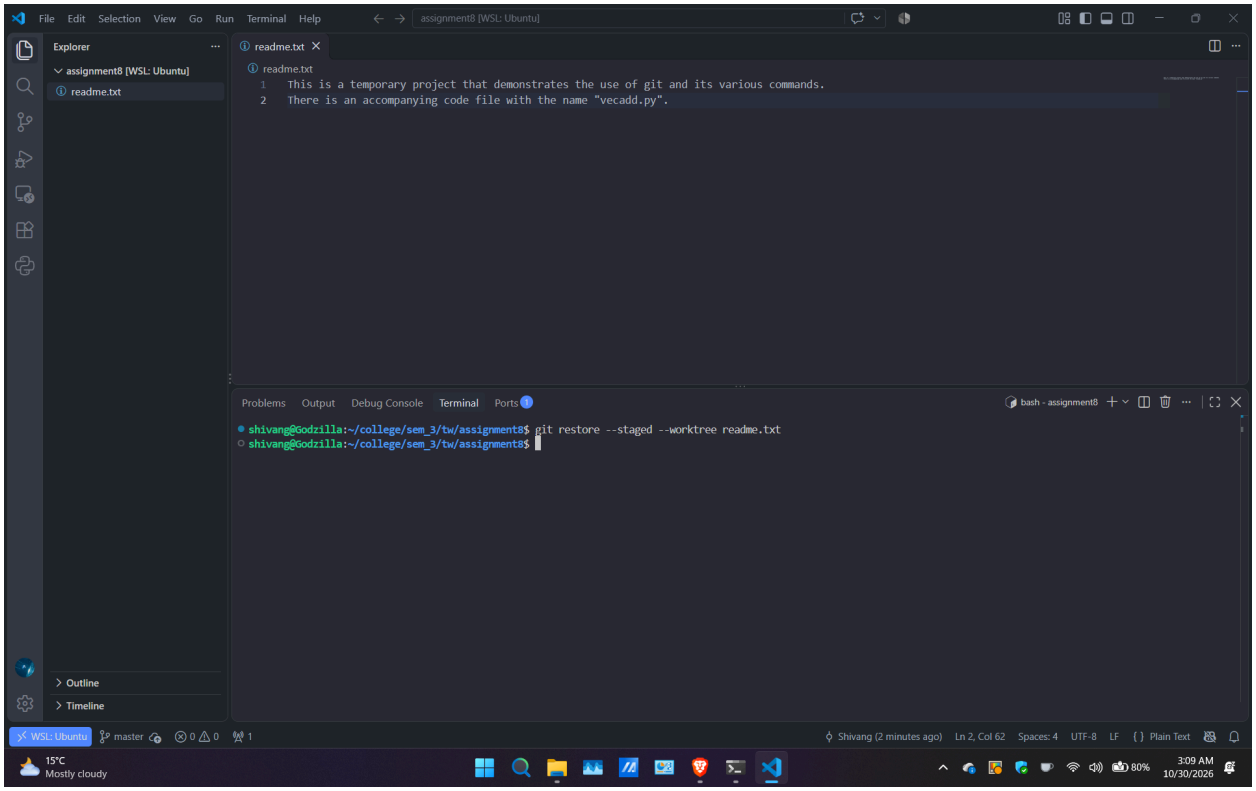


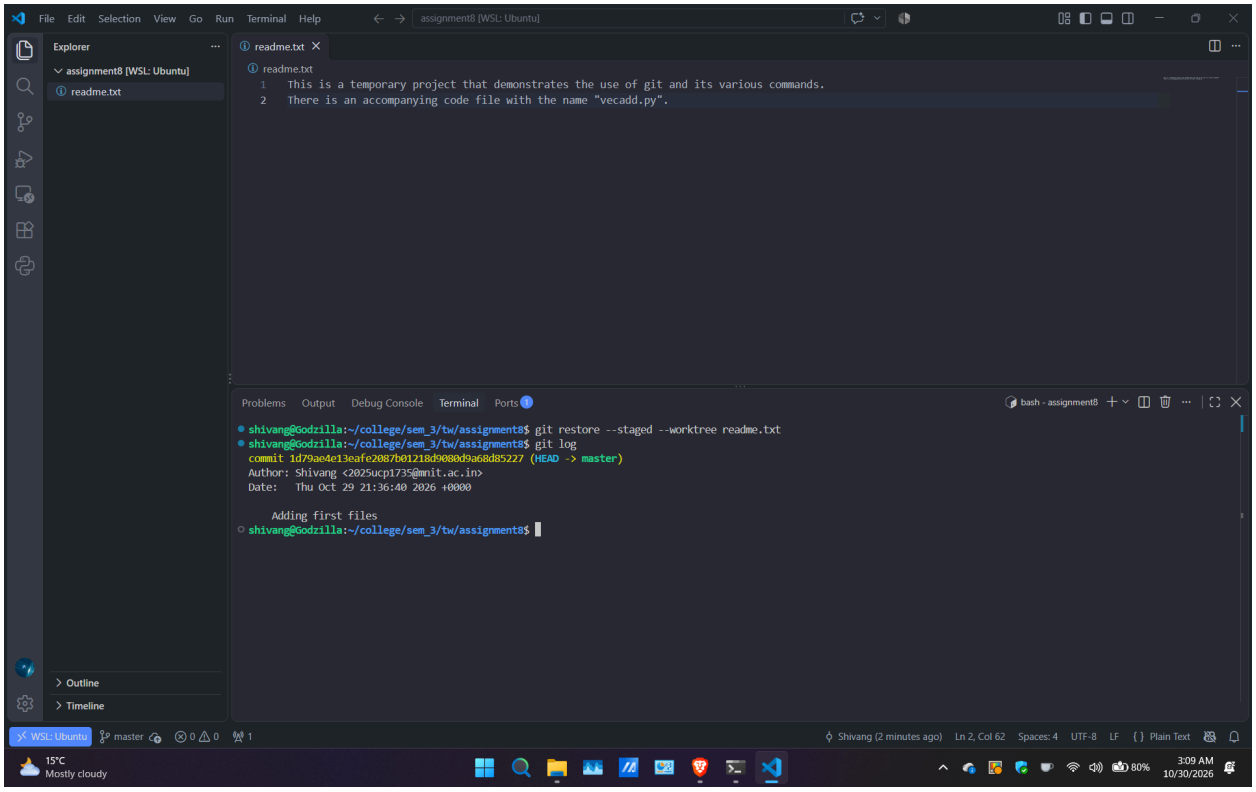


Step 7: Now used git log to see all commits yet.

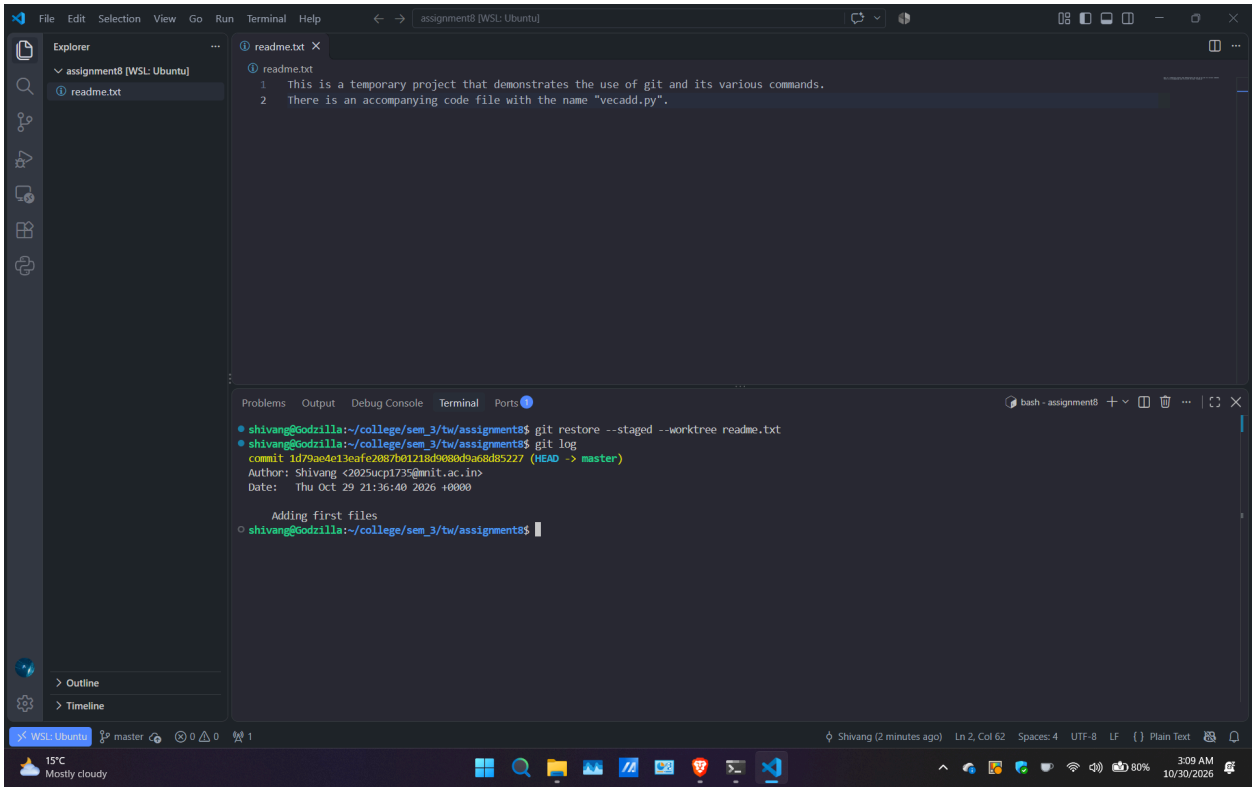


Step 8: Used git revert to again go back to the previous commit. As opposed to restore we can move to any previous commit.

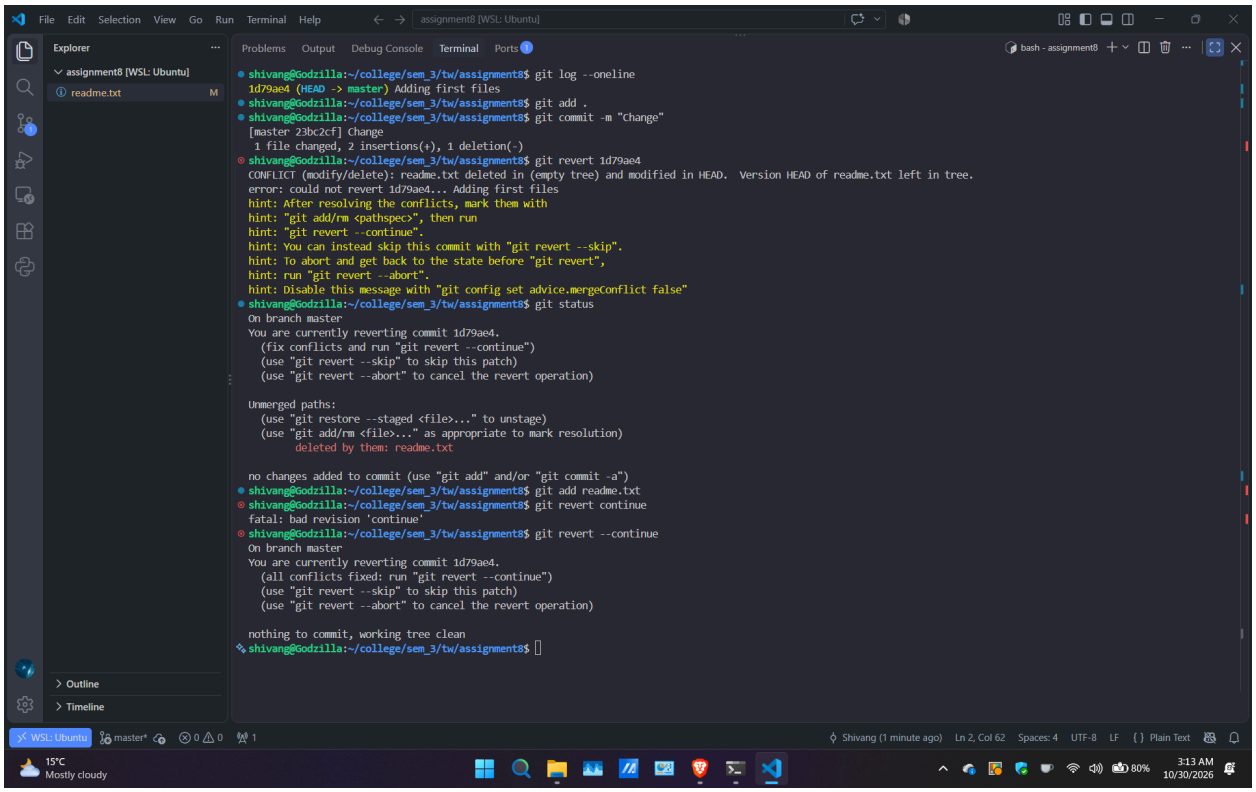


Step 9: Adding the python code as told in the assignment and also running the said commands.

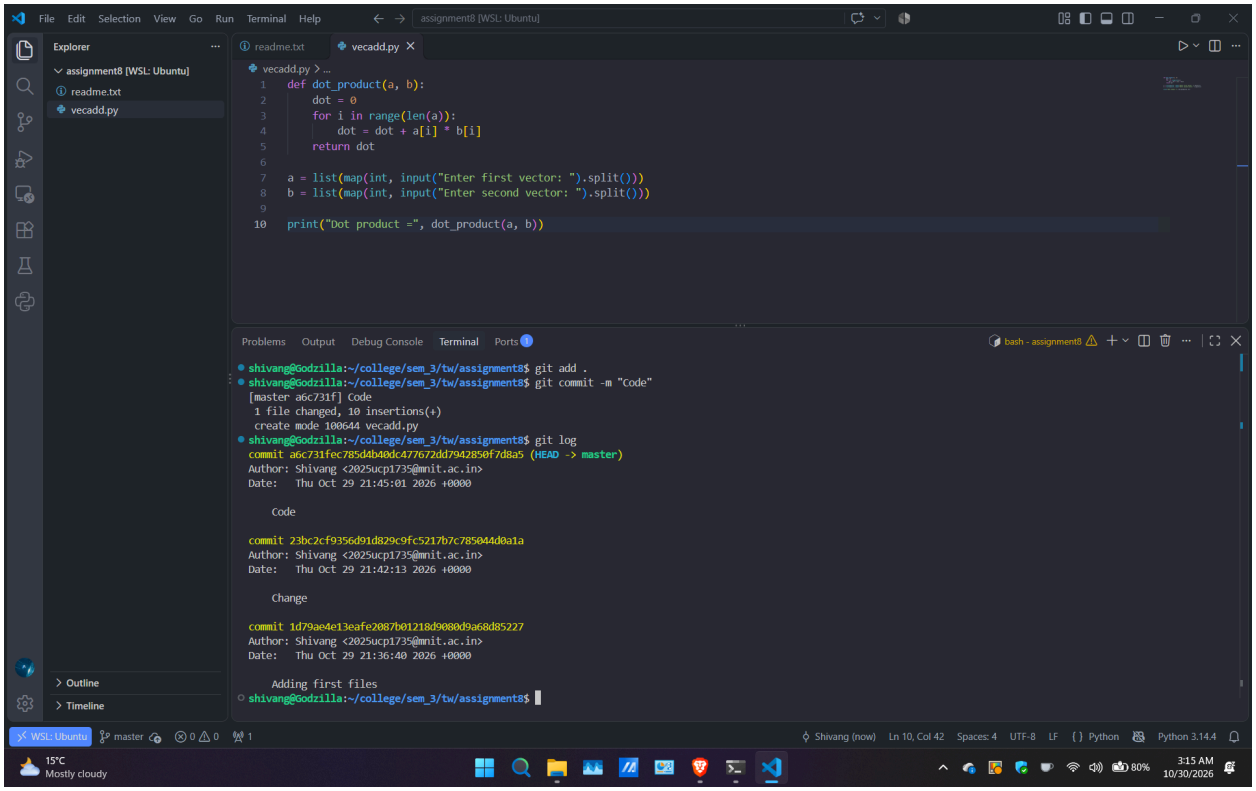

Step 10: Now removing the readme file from the repo and committing the change.

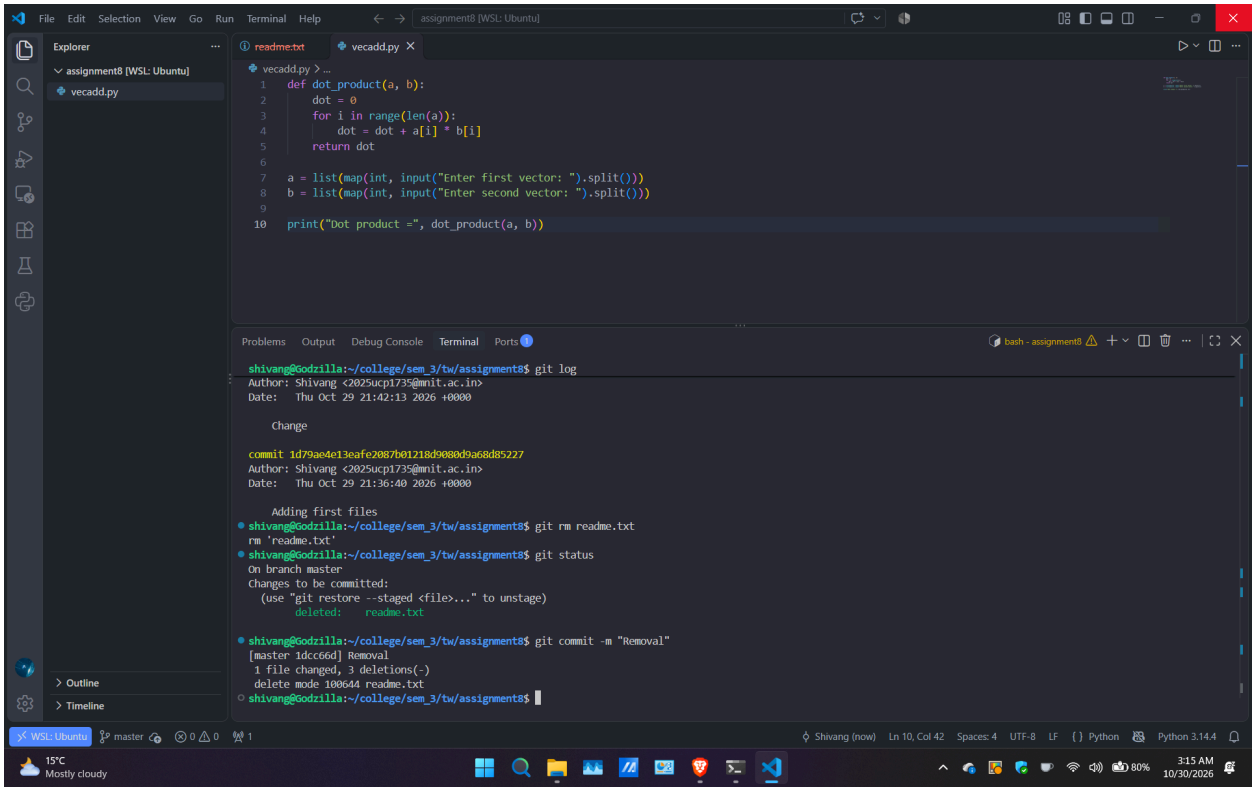

Step 11: Now using git checkout to move to an earlier commit. This is different from git revert since revert actually creates a new latest commit of the change. Git checkout only send you to a copy of the previous commit and does not change the current head commit of the branch. Also checkout requires a longer hash as compared to revert.

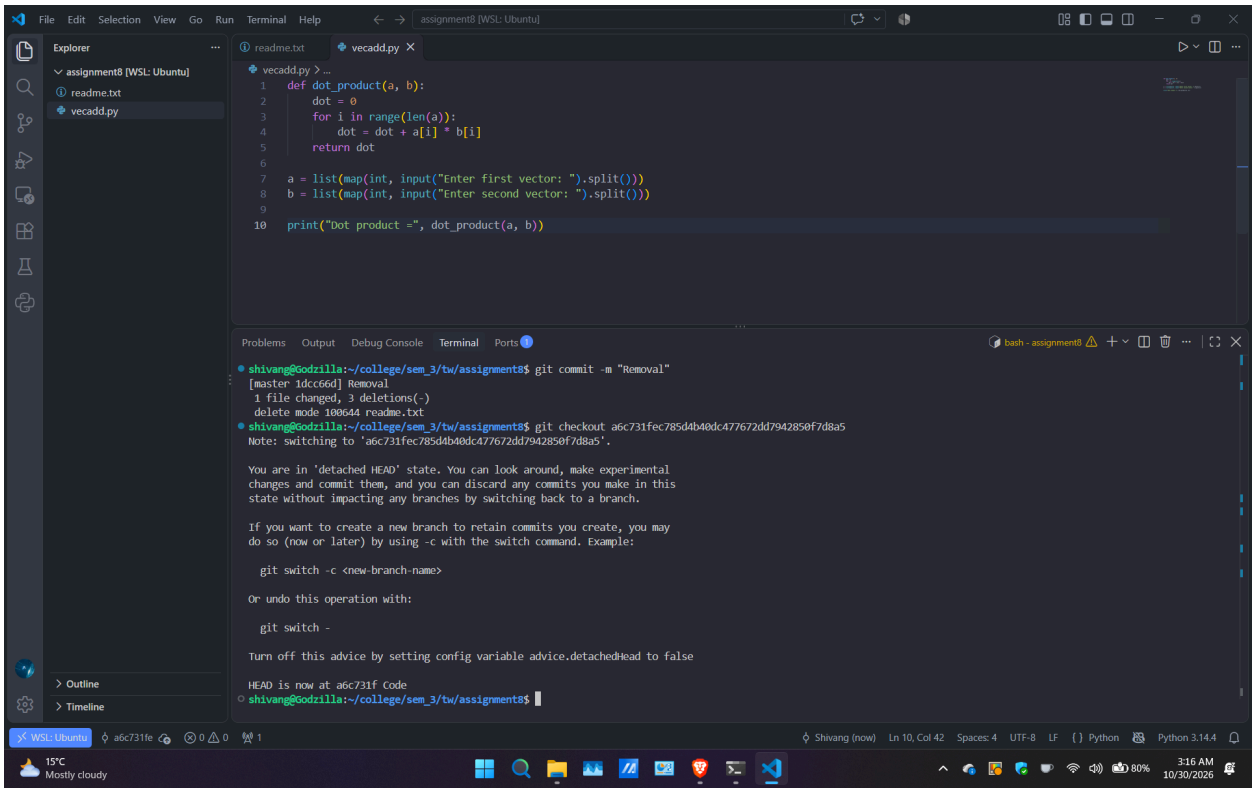

Step 12: Moving back to the true head of the master branch which does not have the readme.txt file. Using git checkout.

