

Name:T.shivani

Ht.No:2023A51312

Batch:05

Task-01

Prompt:

Generate SQL CREATE TABLE statements for an Online Course Platform database.

Requirements:

- Tables: Instructors, Courses, Students, Enrollments
- Include primary keys and foreign keys
- Use appropriate data types
- Ensure normalization (avoid redundancy)
- Define relationships:
- One instructor can teach many courses
- Students can enroll in multiple courses
- Add constraints like NOT NULL, UNIQUE where needed
- Use MySQL syntax

Return clean, executable SQL code.

Code:

```
-- =====  
  
-- 1. Instructors Table  
  
-- =====  
  
CREATE TABLE Instructors (  
  instructor_id INTEGER PRIMARY KEY AUTOINCREMENT,  
  name TEXT NOT NULL,  
  email TEXT UNIQUE NOT NULL,  
  expertise TEXT,
```

```
created_at DATETIME DEFAULT CURRENT_TIMESTAMP  
);
```

```
-- =====
```

```
-- 2. Courses Table
```

```
-- =====
```

```
CREATE TABLE Courses (  
course_id INTEGER PRIMARY KEY AUTOINCREMENT,  
title TEXT NOT NULL,  
description TEXT,  
instructor_id INTEGER,  
duration INTEGER,  
created_at DATETIME DEFAULT CURRENT_TIMESTAMP,  
FOREIGN KEY (instructor_id)  
REFERENCES Instructors(instructor_id)  
ON DELETE SET NULL  
);
```

```
-- =====
```

```
-- 3. Students Table
```

```
-- =====
```

```
CREATE TABLE Students (  
student_id INTEGER PRIMARY KEY AUTOINCREMENT,  
name TEXT NOT NULL,  
email TEXT UNIQUE NOT NULL,  
age INTEGER,  
created_at DATETIME DEFAULT CURRENT_TIMESTAMP  
);
```

```
-- =====
```

```
-- 4. Enrollments Table
```

```

-- =====

CREATE TABLE Enrollments (
enrollment_id INTEGER PRIMARY KEY AUTOINCREMENT,
student_id INTEGER,
course_id INTEGER,
enrollment_date DATE DEFAULT CURRENT_DATE,
FOREIGN KEY (student_id)
REFERENCES Students(student_id)
ON DELETE CASCADE,
FOREIGN KEY (course_id)
REFERENCES Courses(course_id)
ON DELETE CASCADE
);

SELECT name FROM sqlite_master WHERE type='table';

-- Show all tables

SELECT name FROM sqlite_master WHERE type='table';

-- Check structure of each table

PRAGMA table_info(Instructors);
PRAGMA table_info(Courses);
PRAGMA table_info(Students);
PRAGMA table_info(Enrollments);

-- Insert valid data

INSERT INTO Instructors (name, email) VALUES ('Ravi', 'ravi@test.com');
INSERT INTO Courses (title, instructor_id) VALUES (' AI Basics', 1);
INSERT INTO Students (name, email) VALUES ('Pranathi', 'pranathi@test.com');
INSERT INTO Enrollments (student_id, course_id) VALUES (2, 2);

SELECT * FROM Instructors;
SELECT * FROM Students;

```

SELECT * FROM Courses;

SELECT * FROM Enrollments;

INSERT INTO Enrollments (student_id, course_id) VALUES (99, 1);

PRAGMA foreign_key_list(Enrollments);

PRAGMA foreign_key_list(Courses);

Output:

The screenshot shows a SQLite IDE with two panes. The left pane contains the SQL script for creating the Enrollments table and a query to list all tables. The right pane shows the results of the query.

```
40 -- 4. Enrollments Table
41 -- =====
42 CREATE TABLE Enrollments (
43     enrollment_id INTEGER PRIMARY KEY AUTOINCREMENT,
44     student_id INTEGER,
45     course_id INTEGER,
46     enrollment_date DATE DEFAULT CURRENT_DATE,
47
48     FOREIGN KEY (student_id)
49     REFERENCES Students(student_id)
50     ON DELETE CASCADE,
51
52     FOREIGN KEY (course_id)
53     REFERENCES Courses(course_id)
54     ON DELETE CASCADE
55 );
56
57 SELECT name FROM sqlite_master WHERE type='table';
```

The right pane shows the results of the query:

name
Instructors
sqlite_sequence
Courses
Students
Enrollments

The screenshot shows a SQLite IDE with two panes. The left pane contains the SQL script for creating the Enrollments table and a query to list all tables. The right pane shows the results of the query.

```
42 CREATE TABLE Enrollments (
48     FOREIGN KEY (student_id)
49     REFERENCES Students(student_id)
50     ON DELETE CASCADE,
51
52     FOREIGN KEY (course_id)
53     REFERENCES Courses(course_id)
54     ON DELETE CASCADE
55 );
56
57 SELECT name FROM sqlite_master WHERE type='table';
58 -- Show all tables
59 SELECT name FROM sqlite_master WHERE type='table';
60
61 -- Check structure of each table
62 PRAGMA table_info(Instructors);
63 PRAGMA table_info(Courses);
64 PRAGMA table_info(Students);
65 PRAGMA table_info(Enrollments);
```

The right pane shows the results of the query:

cid	name	type	notnull	dflt_value	pk
0	instructor_id	INTEGER	0	NULL	1
1	name	TEXT	1	NULL	0
2	email	TEXT	1	NULL	0
3	expertise	TEXT	0	NULL	0
4	created_at	DATETIME	0	CURRENT_TIMESTAMP	0

database.db

schema.sql

ASS-16.4 > schema.sql

```

42 CREATE TABLE Enrollments (
43     FOREIGN KEY (student_id)
44     REFERENCES Students(student_id)
45     ON DELETE CASCADE,
46
47     FOREIGN KEY (course_id)
48     REFERENCES Courses(course_id)
49     ON DELETE CASCADE
50 );
51
52 SELECT name FROM sqlite_master WHERE type='table';
53 -- Show all tables
54 SELECT name FROM sqlite_master WHERE type='table';
55
56 -- Check structure of each table
57 PRAGMA table_info(Instructors);
58 PRAGMA table_info(Courses);
59 PRAGMA table_info(Students);
60 PRAGMA table_info(Enrollments);

```

SQLite

4	duration	INTEGER	0	NULL	0
5	created_at	DATETIME	0	CURRENT_TIMESTAMP	0

SQL < 1 / 1 > 1 - 5 of 5

cid	name	type	notnull	dflt_value	pk
0	student_id	INTEGER	0	NULL	1
1	name	TEXT	1	NULL	0
2	email	TEXT	1	NULL	0
3	age	INTEGER	0	NULL	0
4	created_at	DATETIME	0	CURRENT_TIMESTAMP	0

SQL < 1 / 1 > 1 - 4 of 4

cid	name	type	notnull	dflt_value	pk
0	enrollment_id	INTEGER	0	NULL	1
1	student_id	INTEGER	0	NULL	0
2	course_id	INTEGER	0	NULL	0
3	enrollment_date	DATE	0	CURRENT_DATE	0

ASS-16.4 > schema.sql

```

60 -- Check structure of each table
61 PRAGMA table_info(Instructors);
62 PRAGMA table_info(Courses);
63 PRAGMA table_info(Students);
64 PRAGMA table_info(Enrollments);
65
66 -- Insert valid data
67 INSERT INTO Instructors (name, email) VALUES ('Ravi', 'ravi@test.com');
68
69 INSERT INTO Courses (title, instructor_id) VALUES ('SQL Basics', 1);
70
71 INSERT INTO Students (name, email) VALUES ('Pranathi', 'pranathi@test.com');
72
73 INSERT INTO Enrollments (student_id, course_id) VALUES (1, 1);
74
75 SELECT * FROM Instructors;
76 SELECT * FROM Students;
77 SELECT * FROM Courses;
78 SELECT * FROM Enrollments;

```

SQL < 1 / 1 > 1 - 2 of 2

instructor_id	name	email	expertise	created_at
1	John	john@test.com	NULL	2026-03-19 14:24:53
2	Ravi	ravi@test.com	NULL	2026-03-19 14:28:00

SQL < 1 / 1 > 1 - 2 of 2

student_id	name	email	age	created_at
1	Siri	siri@test.com	NULL	2026-03-19 14:24:53
2	Pranathi	pranathi@test.com	NULL	2026-03-19 14:28:00

SQL < 1 / 1 > 1 - 2 of 2

course_id	title	description	instructor_id	duration	created_at
1	SQL Basics	NULL	1	NULL	2026-03-19 14:24:53
2	AI Basics	NULL	1	NULL	2026-03-19 14:28:00

SQL < 1 / 1 > 1 - 1 of 1

enrollment_id	student_id	course_id	enrollment_date
1	1	1	2026-03-19

ASS-16.4 > schema.sql

```

75 SELECT * FROM Instructors;
76 SELECT * FROM Students;
77 SELECT * FROM Courses;
78 SELECT * FROM Enrollments;
79
80 INSERT INTO Enrollments (student_id, course_id) VALUES (1, 1);
81 PRAGMA foreign_key_list(Enrollments);
82 PRAGMA foreign_key_list(Courses);

```

SQL < 1 / 1 > 1 - 2 of 2

id	seq	table	from	to	on_update	on_delete	match
0	0	Courses	course_id	course_id	NO ACTION	CASCADE	NONE
1	0	Students	student_id	student_id	NO ACTION	CASCADE	NONE

SQL < 1 / 1 > 1 - 1 of 1

id	seq	table	from	to	on_update	on_delete	match
0	0	Instructors	instructor_id	instructor_id	NO ACTION	SET NULL	NONE

Explanation: The database schema consists of four tables: Instructors, Courses, Students, and Enrollments. Primary keys uniquely identify records, while foreign keys establish relationships between tables. The Courses table references Instructors, and the Enrollments table connects Students and Courses, forming a many-to-many relationship. The use of constraints like UNIQUE, NOT NULL, and ON DELETE CASCADE ensures data integrity. The schema is normalized, avoiding redundancy and maintaining consistency.

Task-02

Prompt

Generate SQL INSERT statements for an Online Course Platform database.

Requirements:

- Insert at least:
- 3 instructors
- 4 courses (linked to instructors)
- 3 students
- Ensure foreign key relationships are valid
- Use realistic sample data
- Avoid duplicate values for UNIQUE fields
- Provide SELECT queries to verify inserted data

Return clean SQLite-compatible SQL code.

Code:

```
PRAGMA foreign_keys = ON;
```

```
-- =====
```

```
-- INSERT INSTRUCTORS
```

```
-- =====
```

```
INSERT INTO Instructors (name, email, expertise) VALUES  
( 'Akshara', 'akshara@example.com', 'Web Development'),  
( 'harika', 'harika@example.com', 'Data Science'),  
( 'Shivani', 'shivani@example.com', 'Cyber Security');
```

```
-- =====
```

```
-- INSERT COURSES
```

```
-- =====
```

```
INSERT INTO Courses (title, description, instructor_id, duration) VALUES  
( 'HTML & CSS', 'Basics of web design', 1, 20),  
( 'JavaScript', 'Frontend scripting', 1, 25),  
( 'Machine Learning', 'Intro to ML', 2, 30),  
( 'Network Security', 'Security fundamentals', 3, 35);
```

```
-- =====
```

```
-- INSERT STUDENTS
```

```
-- =====
```

```
INSERT INTO Students (name, email, age) VALUES
```

```
('Siri', 'siri@gmail.com', 20),
```

```
('Rahul', 'rahul@gmail.com', 21),
```

```
('Anita', 'anita@gmail.com', 19);
```

```
-- =====
```

```
-- INSERT ENROLLMENTS
```

```
-- =====
```

```
INSERT INTO Enrollments (student_id, course_id) VALUES
```

```
(1, 1),
```

```
(1, 3),
```

```
(2, 2),
```

```
(3, 4);
```

```
-- =====
```

```
-- VERIFY DATA
```

```
-- =====
```

```
SELECT * FROM Instructors;
```

```
SELECT * FROM Courses;
```

```
SELECT * FROM Students;
```

```
SELECT * FROM Enrollments;
```

Output:

The screenshot shows a database management interface with two panes. The left pane displays the SQL schema for a database named 'ASS-16.4'. The right pane shows the data for two tables: 'instructors' and 'courses'.

```

85 -- Enable foreign keys (IMPORTANT)
86 PRAGMA foreign_keys = ON;
87
88 -- =====
89 -- INSERT INSTRUCTORS
90 -- =====
91 INSERT INTO Instructors (name, email, expertise) VALUES
92 ('Akshara', 'akshara@example.com', 'Web Development'),
93 ('harika', 'harika@example.com', 'Data Science'),
94 ('Shivani', 'shivani@example.com', 'Cyber Security');
95
96 -- =====
97 -- INSERT COURSES
98 -- =====
99 INSERT INTO Courses (title, description, instructor_id, duration, create_at) VALUES
100 ('HTML & CSS', 'Basics of web design', 1, 20),
101 ('JavaScript', 'Frontend scripting', 1, 25),
102 ('Machine Learning', 'Intro to ML', 2, 30),
103 ('Network Security', 'Security fundamentals', 3, 35);
104
105 -- =====
106 -- INSERT STUDENTS
107 -- =====
108 INSERT INTO Students (name, email, age) VALUES
109 ('Siri', 'siri@gmail.com', 20),
110 ('Rahul', 'rahul@gmail.com', 21),
111 ('Anita', 'anita@gmail.com', 19);

```

instructor_id	name	email	expertise	created_at
1	John	john@test.com	NULL	2026-03-19 14:24:53
2	Ravi	ravi@test.com	NULL	2026-03-19 14:28:00
3	Akshara	akshara@example.com	Web Development	2026-03-19 14:45:04
4	harika	harika@example.com	Data Science	2026-03-19 14:45:04
5	Shivani	shivani@example.com	Cyber Security	2026-03-19 14:45:04

course_id	title	description	instructor_id	duration	create
1	SQL Basics	NULL	1	NULL	2026-03-19
2	AI Basics	NULL	1	NULL	2026-03-19
3	HTML & CSS	Basics of web design	1	20	2026-03-19
4	JavaScript	Frontend scripting	1	25	2026-03-19
5	Machine Learning	Intro to ML	2	30	2026-03-19
6	Network Security	Security fundamentals	3	35	2026-03-19

The screenshot shows a database management interface with two panes. The left pane displays the SQL schema for a database named 'ASS-16.4'. The right pane shows the data for two tables: 'students' and 'enrollments'.

```

87 -- Enable foreign_keys = ON;
88
89 -- =====
90 -- INSERT INSTRUCTORS
91 -- =====
92 INSERT INTO Instructors (name, email, expertise) VALUES
93 ('Akshara', 'akshara@example.com', 'Web Development'),
94 ('harika', 'harika@example.com', 'Data Science'),
95 ('Shivani', 'shivani@example.com', 'Cyber Security');
96
97 -- =====
98 -- INSERT COURSES
99 -- =====
100 INSERT INTO Courses (title, description, instructor_id, duration, create_at) VALUES
101 ('HTML & CSS', 'Basics of web design', 1, 20),
102 ('JavaScript', 'Frontend scripting', 1, 25),
103 ('Machine Learning', 'Intro to ML', 2, 30),
104 ('Network Security', 'Security fundamentals', 3, 35);
105
106 -- =====
107 -- INSERT STUDENTS
108 -- =====
109 INSERT INTO Students (name, email, age) VALUES
110 ('Siri', 'siri@gmail.com', 20),
111 ('Rahul', 'rahul@gmail.com', 21),
112 ('Anita', 'anita@gmail.com', 19);

```

student_id	name	email	age	created_at
1	Siri	siri@test.com	NULL	2026-03-19 14:24:53
2	Pranathi	pranathi@test.com	NULL	2026-03-19 14:28:00
3	Siri	siri@gmail.com	20	2026-03-19 14:45:04
4	Rahul	rahul@gmail.com	21	2026-03-19 14:45:04
5	Anita	anita@gmail.com	19	2026-03-19 14:45:04

enrollment_id	student_id	course_id	enrollment_date
1	1	1	2026-03-19
2	99	1	2026-03-19
3	1	1	2026-03-19
4	1	3	2026-03-19
5	2	2	2026-03-19
6	3	4	2026-03-19

Explanation: The database was populated with sample records for instructors, courses, students, and enrollments using INSERT statements. Foreign key constraints ensure that all relationships are valid, such as courses being linked to instructors and enrollments connecting students to courses. The SELECT queries are used to verify that the data has been inserted correctly. This demonstrates proper data insertion and relational integrity in a normalized database.

Task-03

Prompt

Generate SQL queries to perform CRUD operations on an Online Course Platform database.

Requirements:

- Retrieve all courses
- Update a student's email
- Delete a course

- Use SQLite syntax
- Ensure foreign key constraints are respected
- Include SELECT queries to verify each operation

Return clean and executable SQL code.

Code:

```
-- Enable foreign keys

PRAGMA foreign_keys = ON;

-- =====

-- 1. READ (Retrieve Courses)

-- =====

SELECT * FROM Courses;

-- =====

-- 2. UPDATE (Student Email)

-- =====

UPDATE Students

SET email = 'siri_updated@gmail.com'

WHERE student_id = 1;

-- Verify update

SELECT * FROM Students WHERE student_id = 1;

-- =====

-- 3. DELETE (Remove Course)

-- =====

DELETE FROM Courses

WHERE course_id = 4;

-- Verify deletion

SELECT * FROM Courses;

-- =====

-- 4. CHECK ENROLLMENTS (IMPORTANT)
```

-- =====

```
SELECT * FROM Enrollments;
```

Output:

The screenshot shows a database IDE with a SQL editor on the left and a results pane on the right. The SQL editor contains the following queries:

```
PRAGMA foreign_keys = ON;

-- 1. READ (Retrieve Courses)
SELECT * FROM Courses;

-- 2. UPDATE (Student Email)
UPDATE Students
SET email = 'siri_updated@gmail.com'
WHERE student_id = 1;

-- Verify update
SELECT * FROM Students WHERE student_id = 1;

-- 3. DELETE (Remove Course)
DELETE FROM Courses
WHERE course_id = 4;

-- Verify deletion
SELECT * FROM Courses;
```

The results pane displays the output of the queries:

course_id	title	description	instructor_id	duration	create
1	SQL Basics	NULL	1	NULL	2026-03-19
2	AI Basics	NULL	1	NULL	2026-03-19
3	HTML & CSS	Basics of web design	1	20	2026-03-19
4	JavaScript	Frontend scripting	1	25	2026-03-19
5	Machine Learning	Intro to ML	2	30	2026-03-19
6	Network Security	Security fundamentals	3	35	2026-03-19

student_id	name	email	age	created_at
1	Siri	siri_updated@gmail.com	NULL	2026-03-19 14:24:53

The screenshot shows a database IDE with a SQL editor on the left and a results pane on the right. The SQL editor contains the following queries:

```
PRAGMA foreign_keys = ON;

-- 1. READ (Retrieve Courses)
SELECT * FROM Courses;

-- 2. UPDATE (Student Email)
UPDATE Students
SET email = 'siri_updated@gmail.com'
WHERE student_id = 1;

-- Verify update
SELECT * FROM Students WHERE student_id = 1;

-- 3. DELETE (Remove Course)
DELETE FROM Courses
WHERE course_id = 4;

-- Verify deletion
SELECT * FROM Courses;
```

The results pane displays the output of the queries:

course_id	title	description	instructor_id	duration	create
1	SQL Basics	NULL	1	NULL	2026-03-19
2	AI Basics	NULL	1	NULL	2026-03-19
3	HTML & CSS	Basics of web design	1	20	2026-03-19
5	Machine Learning	Intro to ML	2	30	2026-03-19
6	Network Security	Security fundamentals	3	35	2026-03-19

enrollment_id	student_id	course_id	enrollment_date
1	1	1	2026-03-19
2	99	1	2026-03-19
3	1	1	2026-03-19
4	1	3	2026-03-19
5	2	2	2026-03-19

Explanation: CRUD operations were successfully performed on the database. The SELECT query retrieved all courses, the UPDATE operation modified a student's email correctly, and the DELETE operation removed a course along with its related enrollments due to cascading constraints. Verification queries confirmed that updates were applied accurately and no unintended data loss occurred

Task-04

Prompt

Generate SQL aggregate queries for an Online Course Platform.

Requirements:

- Count number of students enrolled in each course

- List courses with more than a specified number of enrollments
- Use GROUP BY and HAVING clauses
- Use SQLite-compatible syntax
- Include JOINS where necessary


Return clean and executable SQL queries.

Code:

```
SELECT
c.course_id,
c.title,
COUNT(e.student_id) AS total_students
FROM Courses c
LEFT JOIN Enrollments e
ON c.course_id = e.course_id
GROUP BY c.course_id, c.title;

SELECT
c.title,
COUNT(e.student_id) AS total_students
FROM Courses c
JOIN Enrollments e
ON c.course_id = e.course_id
GROUP BY c.course_id, c.title
HAVING COUNT(e.student_id) > 1;
```

Output:

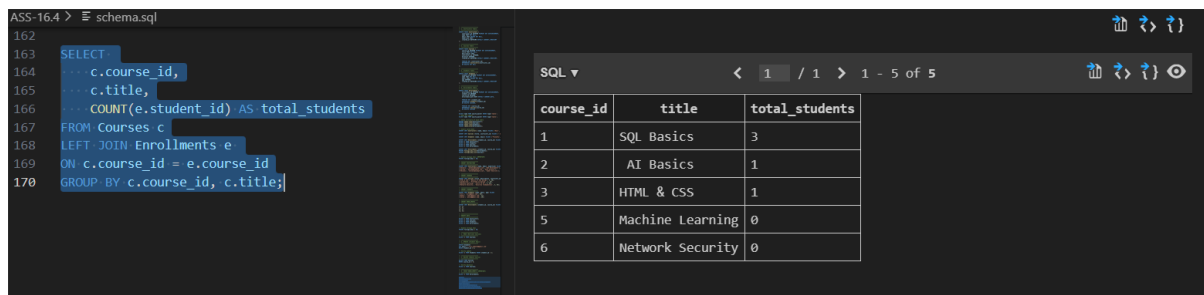

The screenshot shows a SQL editor interface with a query on the left and its results on the right. The query is a SELECT statement that joins the 'Courses' and 'Enrollments' tables, groups by course, and filters for courses with more than one enrollment. The results table shows 6 courses, with the first three having more than one enrollment.

course_id	title	total_students
1	SQL Basics	3
2	AI Basics	1
3	HTML & CSS	1
5	Machine Learning	0
6	Network Security	0

The screenshot shows a SQL IDE with a query editor on the left and a results pane on the right. The query in the editor is:

```

172 SELECT
173     c.title,
174     COUNT(e.student_id) AS total_students
175 FROM Courses c
176 JOIN Enrollments e
177 ON c.course_id = e.course_id
178 GROUP BY c.course_id, c.title
179 HAVING COUNT(e.student_id) > 1;

```

The results pane on the right shows a table with two columns: 'title' and 'total_students'. The table contains one row with the value 'SQL Basics' under 'title' and '3' under 'total_students'.

title	total_students
SQL Basics	3

Explanation: Aggregate queries were successfully implemented to generate summary reports. The number of students enrolled in each course was calculated using the COUNT function with GROUP BY. Courses with more than a specified number of enrollments were filtered using the HAVING clause. The results are accurate and demonstrate proper use of aggregate functions and grouping in SQL.

Task-05

Prompt

Analyze and optimize an SQL query for an Online Course Platform.

Requirements:

- Query retrieves courses taught by instructors from a specific country
- Improve query using efficient joins
- Suggest indexes to improve performance
- Ensure optimized query returns same results
- Use SQLite-compatible syntax

Return original query, optimized query, and explanation.

Code:

-- Original

```

SELECT title
FROM Courses
WHERE instructor_id IN (
SELECT instructor_id
FROM Instructors
WHERE country = 'India'
);

```

-- Optimized

```

SELECT c.title

```

FROM Courses c

JOIN Instructors i

ON c.instructor_id = i.instructor_id

WHERE i.country = 'India';

Output:

The screenshot shows a SQL IDE interface with two query windows. The left window displays two SQL queries: an 'Original' query using a subquery and an 'Optimized' query using a JOIN. The right window shows the results of these queries, which are identical. The results are displayed in a table with a 'title' column.

```
193
194
195 -- Original
196 SELECT title
197 FROM Courses
198 WHERE instructor_id IN (
199     SELECT instructor_id
200     FROM Instructors
201     WHERE country = 'India'
202 );
203
204 -- Optimized
205 SELECT c.title
206 FROM Courses c
207 JOIN Instructors i
208 ON c.instructor_id = i.instructor_id
209 WHERE i.country = 'India';
```

title
SQL Basics
AI Basics
HTML & CSS
Network Security

Explanation: The original query used a subquery to filter courses based on instructor country, which can be inefficient for large datasets. The optimized query replaces the subquery with a JOIN operation, improving performance and readability. Additionally, indexing was suggested on the country and instructor_id columns to speed up data retrieval. Both queries return the same results, but the optimized version is more efficient and scalable.