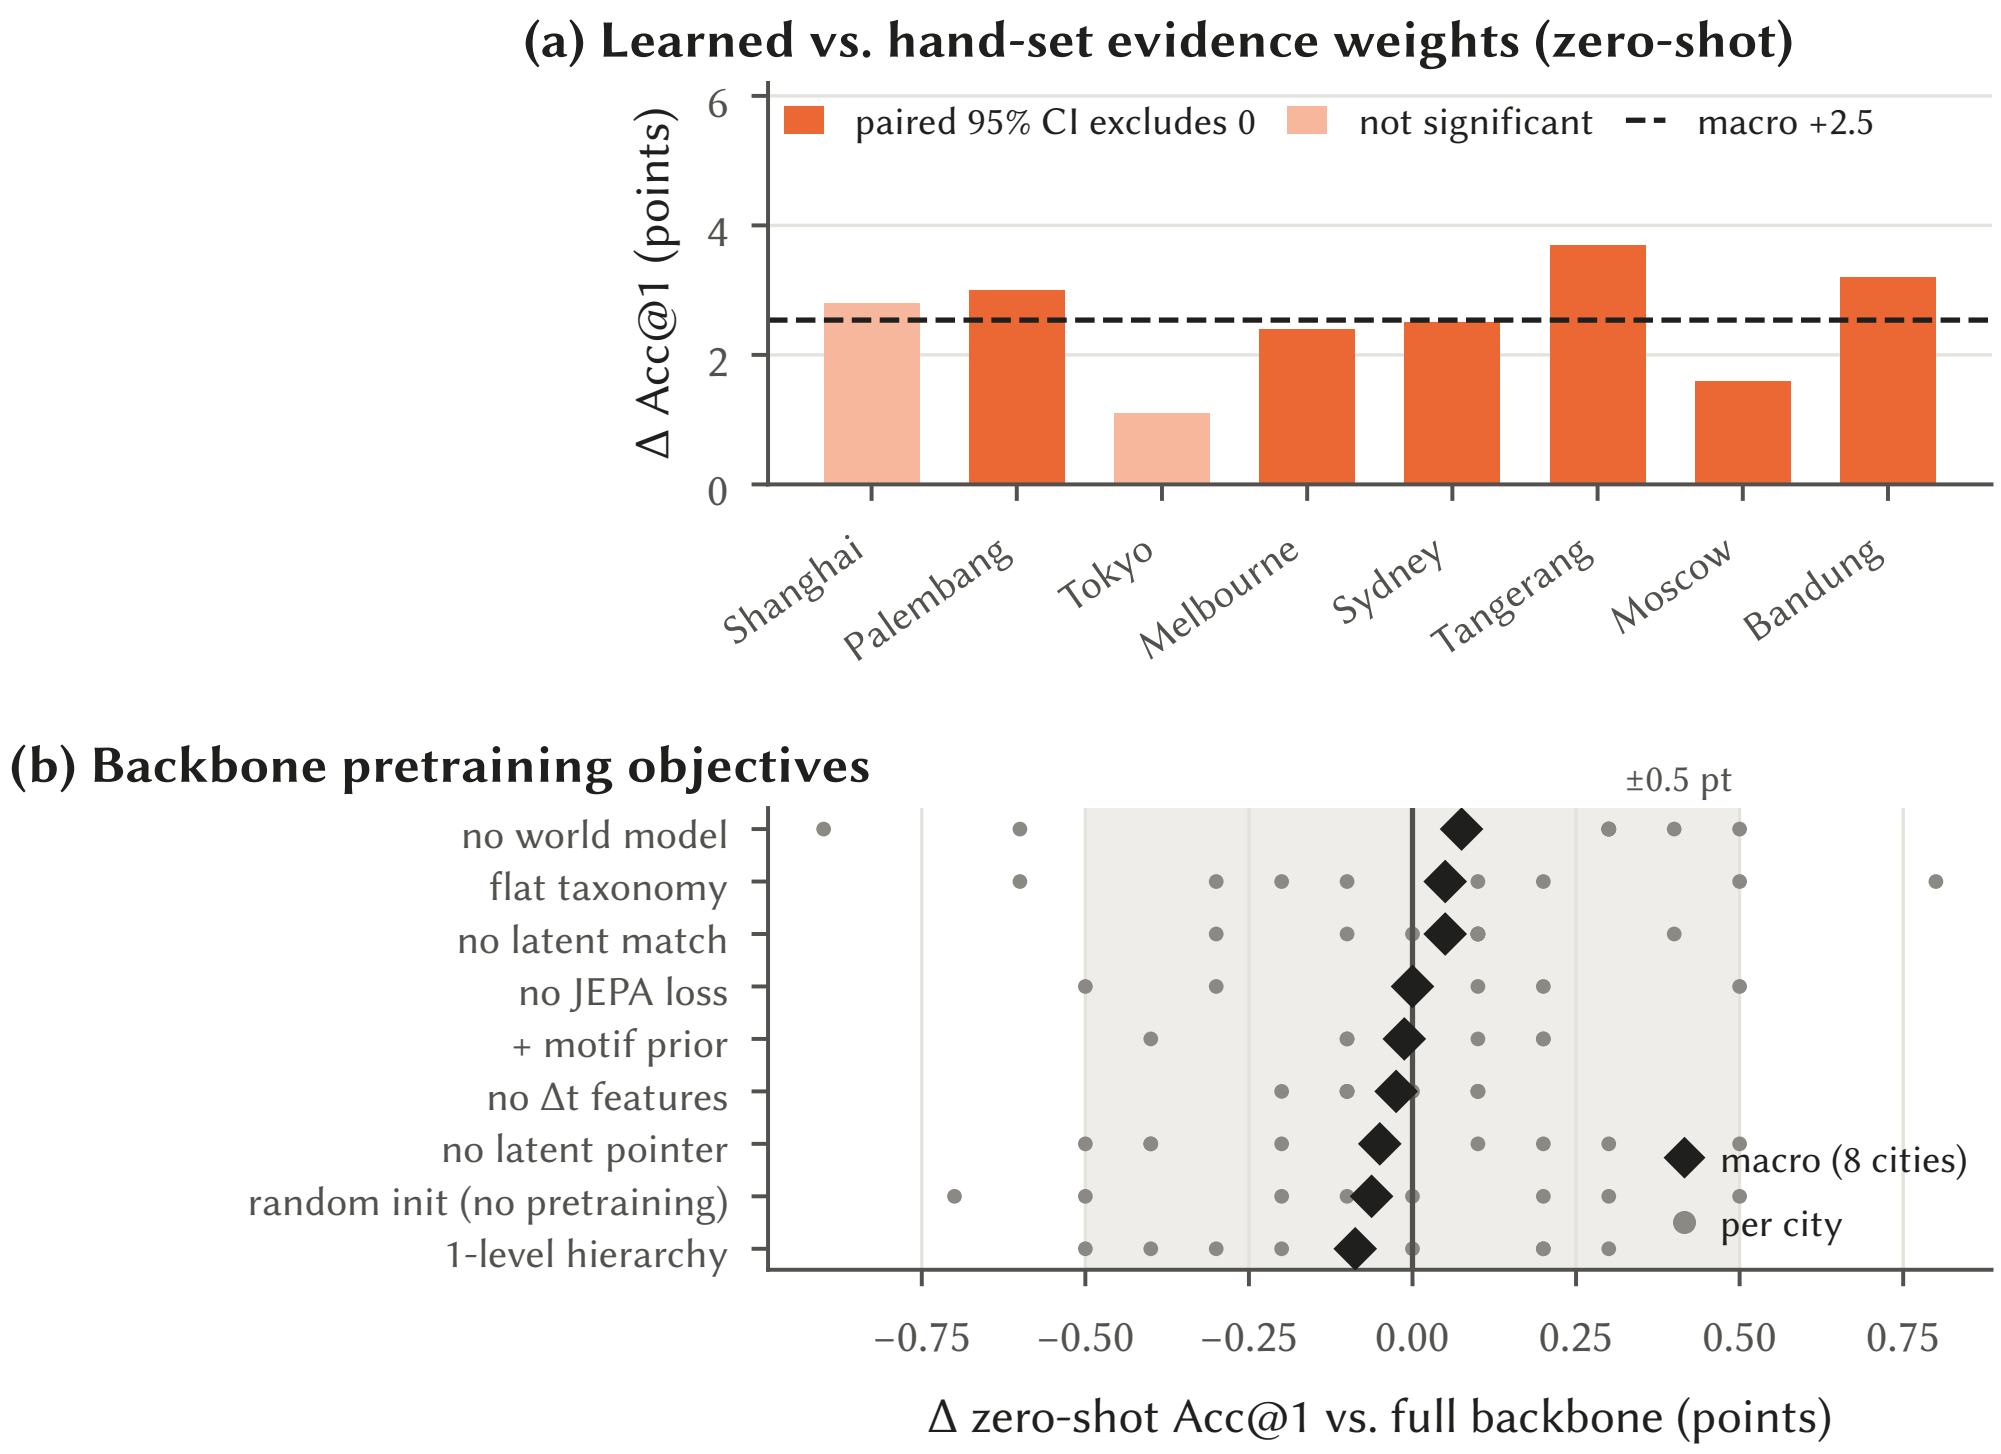
(a) Learned vs. hand-set evidence weights (zero-shot)
Δ Acc@1 (points)
6
4
2
0
paired 95% CI excludes 0
not significant
macro +2.5
Shanghai
Palembang
Tokyo
Melbourne
Sydney
Tangerang
Moscow
Bandung
(b) Backbone pretraining objectives
±0.5 pt
no world model
flat taxonomy
no latent match
no JEPA loss
+ motif prior
no Δt features
no latent pointer
random init (no pretraining)
1-level hierarchy
macro (8 cities)
per city
−0.75
−0.50
−0.25
0.00
0.25
0.50
0.75
Δ zero-shot Acc@1 vs. full backbone (points)