Lab Assignment 8

Stepan Shkrobak

Dr. Michael Bartolacci

IST 894, Section 001: Capstone Experience,

22 March 2026

Table of Contents

Table of Contents.....2
General Context.....2
Technical Context.....4
Screenshots.....6
References.....11

General Context

The Network Security and Diagnostics lab focused on how network infrastructure can be monitored and controlled to protect systems from unauthorized access. There

was a focus on firewalls and how they can serve as checkpoints to inspect traffic entering or leaving a network. Firewalls are widely recognized as a foundational network security control, as the National Institute of Standards and Technology notes that firewalls enforce security policies by monitoring and controlling incoming and outgoing network traffic based on predetermined rules (NIST, 2023). Defining rules for the firewall helps it know what to allow and what to block, allowing administrators to reduce the risk of unauthorized access and limit exposure to malicious actors. This helps administrators ensure that only services, systems, or protocols are permitted to access certain areas of a network, while potentially harmful or just specifically unapproved traffic is blocked.

The lab also covered the ability to analyze and troubleshoot network behavior. Diagnostic tools can help security professionals or administrators see communications on a network to identify active hosts, as well as see open services that may present vulnerabilities. It is almost like tracking a package throughout its shipment process, which allows one to easily identify where a problem might have arisen. Being able to overall understand a network and see the potential security concerns or weaknesses allows professionals to patch the vulnerability or have plans in place for exploitation of that vulnerability if it is chosen to access the vulnerability.

The Cryptography lab covered how sensitive information can be protected. According to the Cybersecurity and Infrastructure Security Agency, encryption plays a critical role in protecting sensitive data by ensuring that information remains unreadable to unauthorized users even if it is intercepted during transmission (CISA, 2022). Steganography, for example, was presented where a message was hidden within an ordinary photo file, which cannot actually be seen in the photo, but is embedded within

the file. Encryption was also shown, where data can be locked up and only accessed by those with a key to that data. The lab also covered hashing and digital signatures, which allow users to verify data integrity and confirm the identity of the sender or ensure data was not changed during transit. These are usually ways organizations can protect data to maintain the confidentiality and integrity of data.

Technical Context

The Network Security and Diagnostics lab covered the monitoring and controlling of network traffic in order ot protect systems from unauthorized access. Modern network security architectures rely heavily on firewalls to inspect and filter network traffic, and Cisco explains that firewalls enforce access control policies by examining packets and allowing or denying traffic based on defined security rules (Cisco, 2023). Control policies were well covered in the lab as it focused on configuration and analysis of firewall behavior using iptables. Firewall configurations were looked at using commands like sudo iptables -S and sudo iptables -L, which showed the rule sets and default chain policies. Administrators can configure rules to allow only specific traffic, such as HTTP (port 80) or DNS (port 53), while blocking other communications with commands such as iptables -P OUTPUT DROP.

Additionally, using commands like ifconfig and route allowed the examination of network interface configurations and routing tables to determine a system's IP address, subnet, and default gateway. Connectivity testing and host discovery were done using ping to test ICMP reachability and nmap to scan hosts for open ports and running services. Also, commands like nmap 192.168.1.100 -p80,443 were used to see whether

web services were accessible through the firewall. Then curl allowed testing of HTTP or HTTPS responses from servers, while traceroute was used to see the path packets take across a network. This overall allows us to examine the network behavior, identify potential misconfigurations or exposed services that could become targets for attackers.

The cryptography lab covered ways used to protect the confidentiality, integrity, and authenticity of digital information as encryption is a fundamental mechanism for protecting digital communications, and Cloudflare explains that encryption converts readable data into ciphertext so that only parties with the correct decryption key can access the original information (Cloudflare, 2023). The lab demonstrated both symmetric and asymmetric cryptographic techniques using the OpenSSL command-line utility. Symmetric encryption examples included decrypting ciphertext files using commands such as openssl enc -d -aes-256-cbc -in aes-cbc.enc -out aes-cbc.txt, while asymmetric encryption involved generating RSA key pairs using openssl genrsa -out private_key.pem 2048 and encrypting files with a public key. Steganography was also covered where hidden information like text was extracted from image files using the steghide extract command. Finally hashing and digital signatures were covered, where hash functions such as SHA-256 were generated with commands like openssl dgst -sha256 file.txt to which can then be used to compare to an “original” hash to ensure the file has not been changed.

Screenshots

```
ubuntu-user@ubuntu19:~$ sudo sh -c 'iptables-restore -v < /iptable-rules.txt'
[sudo] password for ubuntu-user:
# Generated by iptables-save v1.8.4 on Mon Jun 28 11:53:48 2021
Flushing chain `INPUT'
Flushing chain `FORWARD'
Flushing chain `OUTPUT'
# Completed on Mon Jun 28 11:53:48 2021
ubuntu-user@ubuntu19:~$ route
Kernel IP routing table
Destination     Gateway         Genmask         Flags Metric Ref    Use Iface
default         192.168.1.1     0.0.0.0         UG    100    0        0 ens32
link-local      0.0.0.0         255.255.0.0     U     1000   0        0 ens32
192.168.1.0     0.0.0.0         255.255.255.0   U     100    0        0 ens32
```

```
ubuntu-user@ubuntu19:~$ ifconfig ens32
ens32: flags=4163<UP,BROADCAST,RUNNING,MULTICAST>  mtu 1500
        inet 192.168.1.101  netmask 255.255.255.0  broadcast 192.168.1.255
        inet6 fe80::b704:2e6:d5ac:c18e  prefixlen 64  scopeid 0x20<link>
        ether 00:0c:29:19:6d:30  txqueuelen 1000  (Ethernet)
        RX packets 21531  bytes 31864016 (31.8 MB)
        RX errors 0  dropped 0  overruns 0  frame 0
        TX packets 6937  bytes 554091 (554.0 KB)
        TX errors 0  dropped 0 overruns 0  carrier 0  collisions 0

ubuntu-user@ubuntu19:~$ sudo iptables -S
-P INPUT ACCEPT
-P FORWARD ACCEPT
-P OUTPUT DROP
-A OUTPUT -m state --state RELATED,ESTABLISHED -j ACCEPT
-A OUTPUT -p tcp -m tcp --dport 443 -j ACCEPT
-A OUTPUT -o lo -j ACCEPT
-A OUTPUT -p udp -m udp --dport 53 -j ACCEPT
```

```
ubuntu-user@ubuntu19:~$ sudo iptables -L
Chain INPUT (policy ACCEPT)
target     prot opt source               destination

Chain FORWARD (policy ACCEPT)
target     prot opt source               destination

Chain OUTPUT (policy DROP)
target     prot opt source               destination
ACCEPT     all  --  anywhere             anywhere             state RELATED,ESTABLISHED
ACCEPT     tcp  --  anywhere             anywhere             tcp dpt:https
ACCEPT     all  --  anywhere             anywhere
ACCEPT     udp  --  anywhere             anywhere             udp dpt:domain
ubuntu-user@ubuntu19:~$ sudo iptables -v -A OUTPUT -p icmp -j ACCEPT
ACCEPT  icmp opt -- in * out *  0.0.0.0/0  -> 0.0.0.0/0
ubuntu-user@ubuntu19:~$ nmap 192.168.1.100 -p80,443
Starting Nmap 7.80 ( https://nmap.org ) at 2026-03-22 15:18 PDT
Nmap scan report for 192.168.1.100
Host is up (0.00030s latency).

PORT    STATE    SERVICE
80/tcp  filtered http
443/tcp open     https

Nmap done: 1 IP address (1 host up) scanned in 9.52 seconds
ubuntu-user@ubuntu19:~$ ping 192.168.1.100
PING 192.168.1.100 (192.168.1.100) 56(84) bytes of data.
64 bytes from 192.168.1.100: icmp_seq=1 ttl=64 time=0.177 ms
64 bytes from 192.168.1.100: icmp_seq=2 ttl=64 time=0.199 ms
64 bytes from 192.168.1.100: icmp_seq=3 ttl=64 time=0.174 ms
64 bytes from 192.168.1.100: icmp_seq=4 ttl=64 time=0.163 ms
64 bytes from 192.168.1.100: icmp_seq=5 ttl=64 time=0.174 ms
64 bytes from 192.168.1.100: icmp_seq=6 ttl=64 time=0.185 ms
64 bytes from 192.168.1.100: icmp_seq=7 ttl=64 time=0.170 ms
64 bytes from 192.168.1.100: icmp_seq=8 ttl=64 time=0.188 ms
64 bytes from 192.168.1.100: icmp_seq=9 ttl=64 time=0.176 ms
64 bytes from 192.168.1.100: icmp_seq=10 ttl=64 time=0.155 ms
64 bytes from 192.168.1.100: icmp_seq=11 ttl=64 time=0.188 ms
```

```
ubuntu-user@ubuntu19:~$ curl http://192.168.1.100:443
<!DOCTYPE HTML PUBLIC "-//IETF//DTD HTML 2.0//EN">
<html><head>
<title>400 Bad Request</title>
</head><body>
<h1>Bad Request</h1>
<p>Your browser sent a request that this server could not understand.<br />
Reason: You're speaking plain HTTP to an SSL-enabled server port.<br />
 Instead use the HTTPS scheme to access this URL, please.<br />
</p>
<hr>
<address>Apache/2.4.52 (Ubuntu) Server at 127.0.1.1 Port 443</address>
</body></html>
ubuntu-user@ubuntu19:~$ sudo iptables -A OUTPUT -m state --state NEW -j ACCEPT
ubuntu-user@ubuntu19:~$ sudo iptables -A OUTPUT -p udp --dport 53 -j ACCEPT
ubuntu-user@ubuntu19:~$ traceroute 192.168.1.100
traceroute to 192.168.1.100 (192.168.1.100), 30 hops max, 60 byte packets
 1  192.168.1.100 (192.168.1.100)  0.252 ms  0.233 ms  0.225 ms
ubuntu-user@ubuntu19:~$
```

```
ubuntu-user@ubuntu19:~$ sudo iptables -A INPUT -m state --state RELATED,ESTABLISHED -j ACCEPT
ubuntu-user@ubuntu19:~$ sudo iptables -A INPUT -m state --state NEW -j ACCEPT
ubuntu-user@ubuntu19:~$ sudo iptables -P OUTPUT DROP
ubuntu-user@ubuntu19:~$ sudo iptables -S
-P INPUT ACCEPT
-P FORWARD ACCEPT
-P OUTPUT DROP
-A INPUT -m state --state RELATED,ESTABLISHED -j ACCEPT
-A INPUT -m state --state NEW -j ACCEPT
-A OUTPUT -m state --state RELATED,ESTABLISHED -j ACCEPT
-A OUTPUT -p tcp -m tcp --dport 443 -j ACCEPT
-A OUTPUT -o lo -j ACCEPT
-A OUTPUT -p udp -m udp --dport 53 -j ACCEPT
-A OUTPUT -p icmp -j ACCEPT
-A OUTPUT -m state --state NEW -j ACCEPT
-A OUTPUT -p udp -m udp --dport 53 -j ACCEPT
ubuntu-user@ubuntu19:~$
```

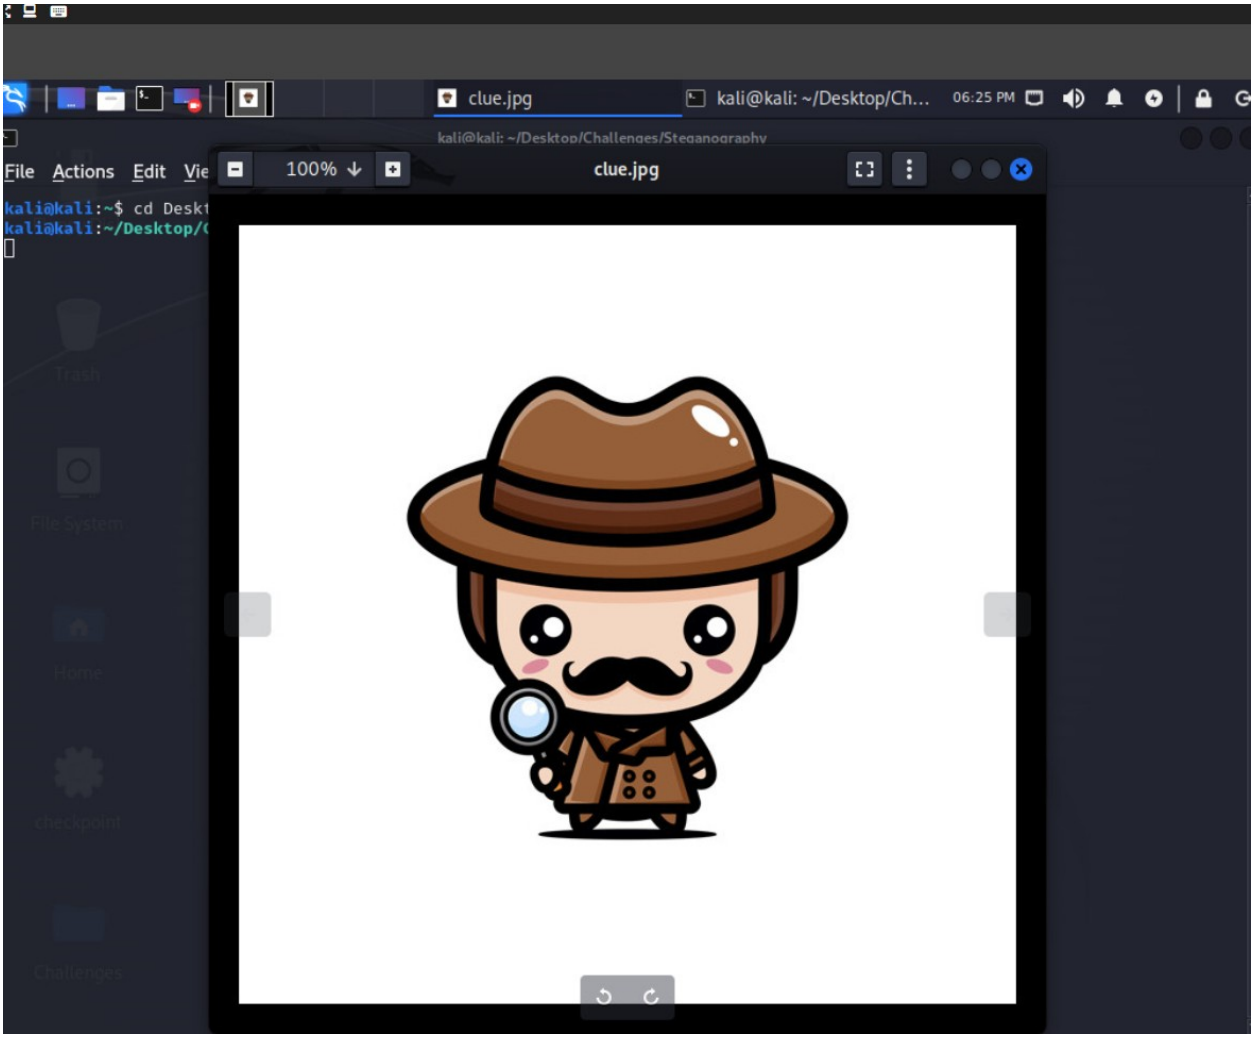

```
kali@kali:~$ cd Desktop/Challenges/Steganography
kali@kali:~/Desktop/Challenges/Steganography$ eog clue.jpg
kali@kali:~/Desktop/Challenges/Steganography$ steghide extract -sf clue.jpg
Enter passphrase:
wrote extracted data to "hidden.txt".
kali@kali:~/Desktop/Challenges/Steganography$ cat hidden.txt
Steganography
kali@kali:~/Desktop/Challenges/Steganography$
```

```
kali@kali:~/Desktop/Challenges/Steganography$ cd ../Cryptography/Symmetric
kali@kali:~/Desktop/Challenges/Cryptography/Symmetric$ awk '{print}' * > salted.txt
kali@kali:~/Desktop/Challenges/Cryptography/Symmetric$ cat salted.txt
Salted__E◆◆◆
```

```
qYgsykBmLtcEaYqsFBqETTUpbS73EjZ3aRENovVoRNcsuGg1L+73Ta3FS6BSDNnA
IXaBcWHgdcBJvCQP/yPSRXmC2FIrAQz0fDTOC4KBK8w9+oTUNNwauOLfJfGUqGLR
rHReZRwvkpXz/FdN7eTZmVTL+/L2kd7QMYAYrBGDOeHiYAsySJuwnd/ThalTcjlR
KQ8neHinAgMBAAECggEAB2WXIo5w1+lnKtHCVBYpS/nt7TdhIesNLkORtcqpD8hq
A4Cr0PAAVx4rAJM4ZrO+cu1pVDSaOPV4WRqMnnTKTxQZnnbRBgJ6AOB3fkcsYexc
SeeWzZvL3w7OANmdomdIXvIIL8SzZpa6j/wqSTHx7HpJlRUko+xAo1oHxR5MeauD
lm+/47iGGK9xTPuAU0j0smVw3zEHxh+LzyqMh1TaOk1s55BeaBDwCRYSt5x+UyTJ
1hlR+/hNsu5IySdCsV0JRcyqMqYbL0JciVmBRJ+LrM1hEhj5I3c6QYCIjSFZp4MW
GX17CLPyuXm7RKRSELDHNv2KiNP98KEwvQWmY62MUQKBgQD1VLwgImKqGJVhi54R
glsL3S/GLGVfh/2wbJbyPXl2jaEYt6+wztGqmiIndAsrfgo8DUekS72GXGL4rg3G
xSFY+M2xUdhH9Gs6pvY7ywiK52FQKAhCxgWOxw83Lw7g62rAizeR9OShEfPpa5an
cjoFRcoGCD91NzuGOCRTZxEWfwKBgQC9BG86×4MUulmUPMuyjPtEUHTe1PZ/xmTD
P5wlnR+fB/HKlRVjMyjVfR272PbJna+vxyn+8nb/GxYbYO7heB2SbzJ/T6Hbiyk4
4JKnVdooN1n6S8lgAFghMwuOFOQA6jHZlteicAUsnmFacIM5S88n/iBAHOCn8zPB
ovVeoDYZ2QKBgGrqR6Y1dgws9ITzRKraxXTxKw3RcUhlyqBlYo8lTVbmOCu+eXmz
WFpiG7pX7zpADpPHMc6fF3SDtLotmGFkrbjJjVLWmUwab9S6yJqcTBfE6Hr3R0pa
ZDep9q6U+oX48qgAw/H+6NhtK4AxXBGTTUfY90cTtxwNOwquUt5qD19fAoGBALWa
Kxv4UDJ8EFDiUHtOBKPQAVmOlv6QqIMG/IkO+zCaO2796byTjKoBOa4feIyhGgjy
e6DdaAMWDRlk+l5aP19Pwt6ardH3VDW3Xm+zhpSZCbP3WJUJ/6J2HqX14FIYsKhz
yt3gbrg9ux9fdlR4R6IPAQFYPWhfu9xRKxotJ42RAoGBAN7+8FH1F5RRTkfjHgM0
LqfhJ4S0C3yFhYdqpS1NY/TQeFyJQl6if5WI8aR/N9X+XbvDnGAoVZfYZCQu3f8H
q0r3ZdQ4I51Gn4ymjVXexsOw6H4N+2nt17bphF0EvBFiRJVoAegtcc2lGd4HEMRF
LwGDLD1mXsJcr4NslDoS0RAR
-----END PRIVATE KEY-----
kali@kali:~/Desktop/Challenges/Cryptography/Asymmetric$ cat key.pub
-----BEGIN PUBLIC KEY-----
MIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEAtSPOzrvaa8XUDo1W3KJe
SzCQ2/w+zJxpCyYgdmv73yiFOXq9mFPXlhkJHs3VrGilK4LTydnasI4odfmLla/C
Owp+UpNNd2QKWIJvuSl7rQo3qPpPIMqhZj8e+rPOkNZi5No/MRS3cUCaTqmILMpA
Zi7XBGmKrBQahE01KW0u9xI2d2kRDaL1aETXLLhoNS/u902txUugUgzZwCF2gXFh
4HXASbwkD/8j0kV5gthSKwEM9Hw0zguCgSvMPfqE1DTcGrji3yXxlKhi0ax0XmUc
L5KV8/xXTe3k2ZlUy/vy9pHe0DGAGKwRgznh4mALMkibsJ3f04WpU3I5USkPJ3h4
pwIDAQAB
-----END PUBLIC KEY-----
kali@kali:~/Desktop/Challenges/Cryptography/Asymmetric$ openssl pkeyutl -in rsa.txt -out rsa.enc -pubin -inkey key.pub -enc
rypt
kali@kali:~/Desktop/Challenges/Cryptography/Asymmetric$ openssl pkeyutl -in rsa.enc -out rsa.dec -inkey private_key.pem -de
crypt
kali@kali:~/Desktop/Challenges/Cryptography/Asymmetric$ cat rsa.dec
Cryptography
kali@kali:~/Desktop/Challenges/Cryptography/Asymmetric$
```

```
wap-wsg-idm-ecid-wtls4: SECG curve over a 113 bit binary field
wap-wsg-idm-ecid-wtls5: X9.62 curve over a 163 bit binary field
wap-wsg-idm-ecid-wtls6: SECG/WTLS curve over a 112 bit prime field
wap-wsg-idm-ecid-wtls7: SECG/WTLS curve over a 160 bit prime field
wap-wsg-idm-ecid-wtls8: WTLS curve over a 112 bit prime field
wap-wsg-idm-ecid-wtls9: WTLS curve over a 160 bit prime field
wap-wsg-idm-ecid-wtls10: NIST/SECG/WTLS curve over a 233 bit binary field
wap-wsg-idm-ecid-wtls11: NIST/SECG/WTLS curve over a 233 bit binary field
wap-wsg-idm-ecid-wtls12: WTLS curve over a 224 bit prime field
Oakley-EC2N-3:
      IPSec/IKE/Oakley curve #3 over a 155 bit binary field.
      Not suitable for ECDSA.
      Questionable extension field!
Oakley-EC2N-4:
      IPSec/IKE/Oakley curve #4 over a 185 bit binary field.
      Not suitable for ECDSA.
      Questionable extension field!
brainpoolP160r1: RFC 5639 curve over a 160 bit prime field
brainpoolP160t1: RFC 5639 curve over a 160 bit prime field
brainpoolP192r1: RFC 5639 curve over a 192 bit prime field
brainpoolP192t1: RFC 5639 curve over a 192 bit prime field
brainpoolP224r1: RFC 5639 curve over a 224 bit prime field
brainpoolP224t1: RFC 5639 curve over a 224 bit prime field
brainpoolP256r1: RFC 5639 curve over a 256 bit prime field
brainpoolP256t1: RFC 5639 curve over a 256 bit prime field
brainpoolP320r1: RFC 5639 curve over a 320 bit prime field
brainpoolP320t1: RFC 5639 curve over a 320 bit prime field
brainpoolP384r1: RFC 5639 curve over a 384 bit prime field
brainpoolP384t1: RFC 5639 curve over a 384 bit prime field
brainpoolP512r1: RFC 5639 curve over a 512 bit prime field
brainpoolP512t1: RFC 5639 curve over a 512 bit prime field
SM2          : SM2 curve over a 256 bit prime field
li@kali:~/Desktop/Challenges/Cryptography/Asymmetric$ openssl ecparam -name prime256v1 -genkey -noout -out private_ecc.pe

li@kali:~/Desktop/Challenges/Cryptography/Asymmetric$ cat private_ecc.pem
---BEGIN EC PRIVATE KEY-----
cCAQEEIKffQIzgh9OrjgqpqgEX82SITYeGG2E5W/1iorDBctm2oAoGCCqGSM49
EHoUQDQgAET4DKdOJvfLp3kRI7DBOnMQJX3h24el2×2aYwaVV7xMidPEVNYSP5
dtX20DtvM3ccgF7I53V5eZpZAWeqQ/Fw==
---END EC PRIVATE KEY-----
li@kali:~/Desktop/Challenges/Cryptography/Asymmetric$
```

```
kali@kali:~/Desktop/Challenges/Cryptography/Asymmetric$ openssl req -new -x509 -key private_ecc.pem -out cert_ecc.pem -days
 365
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
-----
Country Name (2 letter code) [AU]:
State or Province Name (full name) [Some-State]:
Locality Name (eg, city) []:
Organization Name (eg, company) [Internet Widgits Pty Ltd]:
Organizational Unit Name (eg, section) []:
Common Name (e.g. server FQDN or YOUR name) []:
Email Address []:
kali@kali:~/Desktop/Challenges/Cryptography/Asymmetric$
kali@kali:~/Desktop/Challenges/Cryptography/Asymmetric$ cat cert_ecc.pem
-----BEGIN CERTIFICATE-----
MIIB3zCCAYWgAwIBAgIUO0DvbUrBISHOwXbP4c0xJebV1NIwCgYIKoZIzj0EAwIw
RTELMAkGA1UEBhMCQVUxEzARBgNVBAgMClNvbWUtU3RhdGUxITAfBgNVBAoMGElu
dGVybmV0IFdpZGdpdHMgUHR5IEx0ZDAeFw0yNjAzMjIyMjMxMzVaFw0yNzAzMjIy
MjMxMzVaMEUxCzAJBgNVBAYTAkFVMRMwEQYDVQQIDApTb21lLVN0YXRlMSEwHwYD
VQQKDBhJbnRlcm5ldCBXaWRnaXRzIFB0eSBMdGQwWTATBgcqhkjOPQIBBggqhkjO
PQMBBwNCAARPgMp04m98uneREjsME6cxAlfeHbh6XbHZpjBpVXvEyJ08RU1hI/kB
R21fbQO28zdxyAXsjndXl5mlkBZ6pD8Xo1MwUTAdBgNVHQ4EFgQUwS+Xj49edtBb
19kw7l95sR7JRowwHwYDVR0jBBgwFoAUwS+Xj49edtBb19kw7l95sR7JRowwDwYD
VR0TAQH/BAUwAwEB/zAKBggqhkjOPQQDAgNIADBFAiAlWVsRbHFTNXQa7H2+R2Ds
SVthv07bA9lxfKuWZhUWpAIhANgl9q1WtTs7SgABmjBBQyhn4N2qtmUIO40oilQE
A8nG
-----END CERTIFICATE-----
kali@kali:~/Desktop/Challenges/Cryptography/Asymmetric$
```

```
kali@kali:~/Desktop/Challenges/Cryptography/Asymmetric$ cd ../../Hashing
kali@kali:~/Desktop/Challenges/Hashing$ cat hash1.txt
Hash
kali@kali:~/Desktop/Challenges/Hashing$ cat hash2.txt
hash
kali@kali:~/Desktop/Challenges/Hashing$ openssl dgst -sha256 hash1.txt > hash1-256.txt
kali@kali:~/Desktop/Challenges/Hashing$ openssl dgst -sha256 hash2.txt > hash2-256.txt
kali@kali:~/Desktop/Challenges/Hashing$ cat hash1
hash1-256.txt  hash1.txt
kali@kali:~/Desktop/Challenges/Hashing$ cat hash1
hash1-256.txt  hash1.txt
kali@kali:~/Desktop/Challenges/Hashing$ cat hash1
hash1-256.txt  hash1.txt
kali@kali:~/Desktop/Challenges/Hashing$ cat hash1-256.txt
SHA2-256(hash1.txt)= d51e6cce8a1082eeede52120f0584168e44ff35a83fdce24cc853908d18d89c6
kali@kali:~/Desktop/Challenges/Hashing$ cat hash2-256.txt
SHA2-256(hash2.txt)= 4e5e494fa316ffc82b8252b23524f1433639858267d641c1217059dc4403e045
kali@kali:~/Desktop/Challenges/Hashing$
```

Security+ - Network Security and Diagnostics
Lab · 1 hour

A layered approach must be designed and implemented to secure a system or infrastructure. Each critical component should be individually assessed on the risks it faces. In all scenarios, for all types of systems, network security is always a crucial component. Being the backbone of communication and the carrier of sensitive and proprietary information, once compromised, it allows unauthorized parties access on a large scale.

Security+ - Cryptography
Lab · 1 hour

When using the Internet, users retrieve or share information. Depending on the application, purpose, and implementation methods, the need to provide data confidentiality, integrity, and authenticity emerges. To ensure these requirements are fulfilled and that only authorized parties have access to the data, the information transmitted over the Internet is obfuscated.

References

Cisco. (2023). What is a firewall?

https://www.cisco.com/c/en/us/products/security/firewalls/what-is-a-firewall.html

Cloudflare. (2023). What is encryption? https://www.cloudflare.com/learning/ssl/what-is-encryption/

Cybersecurity and Infrastructure Security Agency. (2023). *Encryption basics.* https://www.cisa.gov/encryption

National Institute of Standards and Technology. (2023). Guidelines on Firewalls and Firewall Policy (SP 800-41 Rev.1). https://nvlpubs.nist.gov/nistpubs/Legacy/SP/nistspecialpublication800-41r1.pdf