



Postman API Endpoints Hitting

Create Customer

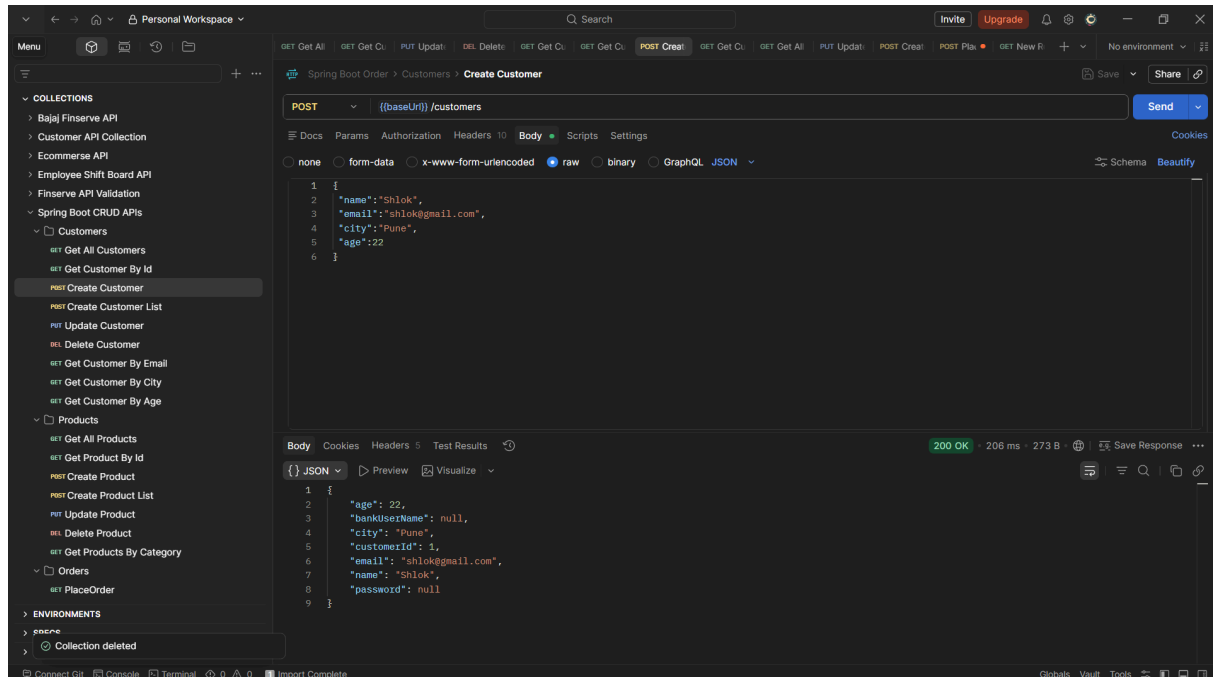

Create Customer List

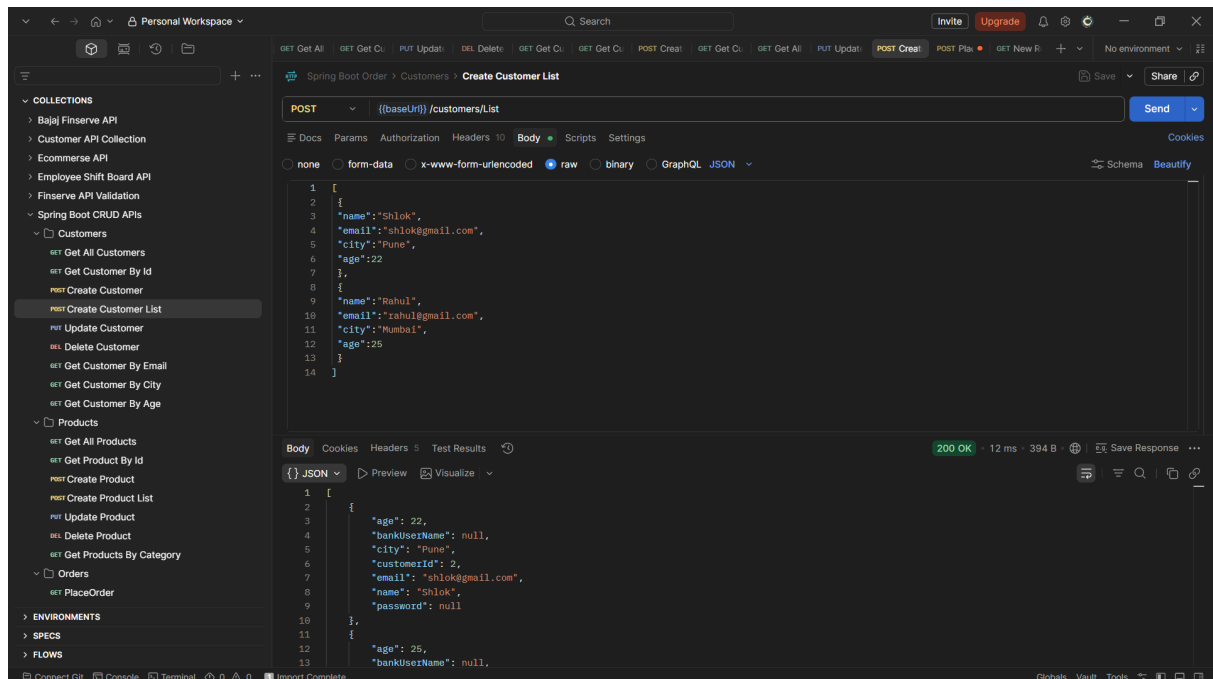

Get all customers

GET `((baseUrl))/customers` Send

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body 200 OK 9 ms 511 B Save Response

```
1 {
2   {
3     "age": 22,
4     "bankUserName": null,
5     "city": "Pune",
6     "customerId": 1,
7     "email": "shlok@gmail.com",
8     "name": "Shlok",
9     "password": null
10  },
11  {
12    "age": 22,
13    "bankUserName": null,
14    "city": "Pune",
15    "customerId": 2,
16    "email": "shlok@gmail.com",
17    "name": "Shlok",
18    "password": null
19  },
20  {
21    "age": 25,
22    "bankUserName": null,
23    "city": "Mumbai",
24    "customerId": 3,
25    "email": "rahul@gmail.com",
26    "name": "Rahul",
27    "password": null
28  }
29 }
```

Get customer by id

GET `((baseUrl))/customers/1` Send

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body 200 OK 12 ms 273 B Save Response

```
1 {
2   "age": 22,
3   "bankUserName": null,
4   "city": "Pune",
5   "customerId": 1,
6   "email": "shlok@gmail.com",
7   "name": "Shlok",
8   "password": null
9 }
```

Get customer by email

The screenshot shows the Postman interface with a GET request to `{{baseUri}}/customers/email/rahul@gmail.com`. The response is a 200 OK status with a JSON body containing customer details.

Request:

```
GET {{baseUri}}/customers/email/rahul@gmail.com
```

Response (JSON):

```
{  "age": 25,  "bankUserName": null,  "city": "Mumbai",  "customerId": 3,  "email": "rahul@gmail.com",  "name": "Rahul",  "password": null}
```

Get customers by city

The screenshot shows the Postman interface with a GET request to `{{baseUri}}/customers/city/Pune`. The response is a 200 OK status with a JSON body containing an array of two customer objects.

Request:

```
GET {{baseUri}}/customers/city/Pune
```

Response (JSON):

```
[  {    "age": 22,    "bankUserName": null,    "city": "Pune",    "customerId": 1,    "email": "shlok@gmail.com",    "name": "Shlok",    "password": null  },  {    "age": 22,    "bankUserName": null,    "city": "Pune",    "customerId": 2,    "email": "shlok@gmail.com",    "name": "Shlok",    "password": null  }]
```

Get customers by age

The screenshot shows the Postman interface with a GET request to `((baseUrl))/customers/age/22`. The response is a 200 OK status with a JSON body containing customer details.

```
GET ((baseUrl))/customers/age/22
```

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body

```
{
  "age": 25,
  "bankUserName": null,
  "city": "Mumbai",
  "customerId": 3,
  "email": "rahul@gmail.com",
  "name": "Rahul",
  "password": null
}
```

200 OK · 9 ms · 277 B

Create Product

The screenshot shows the Postman interface with a POST request to `((baseUrl))/products`. The request body is a JSON object representing a product. The response is a 200 OK status with a JSON body containing the created product details.

```
POST ((baseUrl))/products
```

Body

```
{
  "name": "Laptop",
  "category": "Electronics",
  "price": 50000
}
```

200 OK · 14 ms · 244 B

Body

```
{
  "category": "Electronics",
  "price": 50000.0,
  "productId": 1,
  "productName": null,
  "quantity": 0
}
```

Create product by list

The screenshot shows the Postman interface with a POST request to `[[baseUri]]/products/list`. The request body is a JSON array of two product objects. The response is a 200 OK status with a 14 ms response time and 336 B of data. The response body is a JSON array of two product objects.

```
POST [[baseUri]]/products/list
```

```
{
  "name": "Laptop",
  "category": "Electronics",
  "price": 50000
},
{
  "name": "Mobile",
  "category": "Electronics",
  "price": 25000
}
```

Body: 200 OK · 14 ms · 336 B

```
[
  {
    "category": "Electronics",
    "price": 50000.0,
    "productId": 2,
    "productName": null,
    "quantity": 0
  },
  {
    "category": "Electronics",
    "price": 25000.0,
    "productId": 3,
    "productName": null,
    "quantity": 0
  }
]
```

Get product by id

The screenshot shows the Postman interface with a GET request to `[[baseUri]]/products/1`. The response is a 200 OK status with a 10 ms response time and 244 B of data. The response body is a JSON object representing a product.

```
GET [[baseUri]]/products/1
```

Query Params

Key	Value	Description
Key	Value	Description

Body: 200 OK · 10 ms · 244 B

```
{
  "category": "Electronics",
  "price": 50000.0,
  "productId": 1,
  "productName": null,
  "quantity": 0
}
```

Update product

Personal Workspace

Q Search

Invite Upgrade

No environment

Spring Boot Order > Products > Update Product

PUT {{baseUrl}}/products/1

Send

Docs Params Authorization Headers 10 Body Scripts Settings

Body

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "name": "Gaming Laptop",
3   "category": "Electronics",
4   "price": 75000
5 }
```

Body Cookies Headers 5 Test Results

JSON Preview Visualize

```
1 {
2   "category": "Electronics",
3   "price": 75000.0,
4   "productId": 1,
5   "productName": null,
6   "quantity": 0
7 }
```

200 OK 65 ms 244 B Save Response

Connect Git Console Terminal

Import Complete

Globals Vault Tools

Delete product

Personal Workspace

Q Search

Invite Upgrade

No environment

Spring Boot Order > Products > Delete Product

DELETE {{baseUrl}}/products/2

Send

Docs Params Authorization Headers 7 Body Scripts Settings

Body

Raw Preview Visualize

```
1 Product deleted Successfully
```

200 OK 10 ms 192 B Save Response

Connect Git Console Terminal

Import Complete

Globals Vault Tools

Get all products

Personal Workspace

Search

Invite Upgrade

Spring Boot Order > Products > Get All Products

GET {{baseUrl}}/products

Send

Docs Params Authorization Headers 7 Body Scripts Settings

Cookies

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body Cookies Headers 5 Test Results

200 OK 50 ms 248 B Save Response

JSON

Preview Visualize

```
1 [
2   {
3     "category": "Electronics",
4     "price": 75000.0,
5     "productId": 1,
6     "productName": null,
7     "quantity": 0
8   }
9 ]
```

Connect Git Console Terminal

Import Complete

Globals Vault Tools

Place Order

The screenshot shows the Postman interface with a collection named 'Orders API' expanded to the 'Place Order' endpoint. The request is a POST to '({baseUrl})/orders/1/1/5'. The response is a 200 OK status with a 20 ms response time and 440 B of data. The JSON response body is as follows:

```
1 {
2   "customer": {
3     "age": 22,
4     "bankUserName": null,
5     "city": "Pune",
6     "customerId": 1,
7     "email": "shlok@gmail.com",
8     "name": "Shlok",
9     "password": null
10  },
11  "orderId": 1,
12  "product": {
13    "category": "Electronics",
14    "price": 75000.0,
15    "productId": 1,
16    "productName": null,
17    "quantity": -5
18  },
19  "quantityOrdered": 5,
20  "totalPrice": 375000.0
21 }
```

Get All Orders

The screenshot shows the Postman interface with the 'Orders API' collection expanded to the 'Get All Orders' endpoint. The request is a GET to '({baseUrl})/orders'. The response is a 200 OK status with a 11 ms response time and 442 B of data. The JSON response body is as follows:

```
1 [
2   {
3     "customer": {
4       "age": 22,
5       "bankUserName": null,
6       "city": "Pune",
7       "customerId": 1,
8       "email": "shlok@gmail.com",
9       "name": "Shlok",
10      "password": null
11    },
12    "orderId": 1,
13    "product": {
14      "category": "Electronics",
15      "price": 75000.0,
16      "productId": 1,
17      "productName": null,
18      "quantity": -5
19    },
20    "quantityOrdered": 5,
21    "totalPrice": 375000.0
22  }
23 ]
```


Get Order by id

Personal Workspace

Search

Invite Upgrade

No environment

GET Get t POST Creat GET Get Pr PUT Updat: POST Creat POST Creat DEL Deler GET Get All GET Get Pr POST Pla GET Get All GET Get Or GET Get Or No environment

Orders API > Get Order By Id

Save Share

GET

{{baseUri}}/orders/1

Send

Docs Params Authorization Headers 7 Body Scripts Settings

Cookies

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body Cookies Headers 5 Test Results

200 OK · 6 ms · 440 B · Save Response

JSON

Preview Visualize

Add to favorites

```
1 {
2   "customer": {
3     "age": 22,
4     "bankUserName": null,
5     "city": "Pune",
6     "customerId": 1,
7     "email": "shlok@gmail.com",
8     "name": "Shlok",
9     "password": null
10  },
11  "orderId": 1,
12  "product": {
13    "category": "Electronics",
14    "price": 75000.0,
15    "productId": 1,
16    "productName": null,
17    "quantity": -5
18  },
19  "quantityOrdered": 5,
20  "totalPrice": 375000.0
21 }
```

Connect Git Console Terminal

Import Complete

Globals Vault Tools

Delete by id

Personal Workspace

Search

Invite Upgrade

No environment

POST Creat GET Get Pr PUT Updat: POST Creat POST Creat DEL Deler GET Get All GET Get Pr POST Pla GET Get All GET Get Or GET Get Or No environment

Orders API > Cancel Order

Save Share

DELETE

{{baseUri}}/orders/1

Send

Docs Params Authorization Headers 7 Body Scripts Settings

Cookies

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body Cookies Headers 5 Test Results

200 OK · 5 ms · 199 B · Save Response

Raw

Preview Visualize

Add to favorites

```
Order with ID 1 has been cancelled.
```

Connect Git Console Terminal

Import Complete

Globals Vault Tools

Customer tootal amount

Personal Workspace

Q Search

Invite Upgrade

POST http://local • POST Create Cus • GET Get Custom • DEL Delete Prodi • POST Create Cust: POST Create Prodi • GET ((baseUri))/orders/totalAmount/1 • GET Get All Custor • POST Place Order • No environment

Save Share

COLLECTIONS

Bajaj Finserve API

Customer API Collection

Ecommerce API

Employee Shift Board API

Finserve API Validation

Orders API

Spring Boot Order

Customers

Products

ENVIRONMENTS

SPECS

FLAWS

GET ((baseUri))/orders/totalAmount/1

GET

Send

Docs Params Authorization Headers 7 Body Scripts Settings

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body Cookies Headers 5 Test Results

JSON Preview Visualize

200 OK 7 ms 163 B