aws configure

aws access key ID : delete

create access key → CLI → continue → create

Access key best practices : download.

Copy and Paste access key and secret key

Copy and paste aws-lapenet config --- name... shobhitha Cluster -- Region.

2/4/25

Linux File Permissions

User - Owner of the file

Group - Collect^n of user with same file permiss^n

Others - not an owner & not in grp.

		Values
r	Read	4
w	Write	2
x	execute	1

7 numeric
values

File Types

directory : starts with d

Regular file : -

Directory	File
d rwx r-x r-x	- rw -r-- r--

owner   group   other

$4+2+0$ $4+0+0$ $4+0+0$

6   4   4   644

14.

change / reset file permission

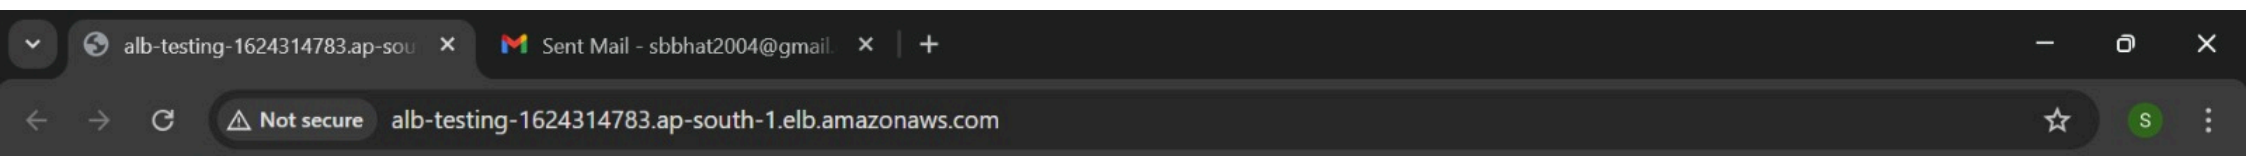chmod 700 filename

777

owner ↓
rwx

In ec2

sudo su (root user)

chmod 700 f1.

eg: 001 → others execute

chmod value filename

JENKINS

- Open-source
- Automation server used for implementing CI/CD Delivery pipelines,
- Automating tasks like building, testing and deploying s/w, leading to faster delivery s/w lifecycle.

- It's developed using Java

WELCOME TO LINUX CLASS ip-172-31-7-16.ap-south-1.compute.internal