


Easy Phish

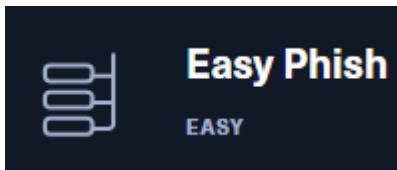

Here we get the first part of the flag

```
# dig txt secure-startup.com

; <<>> DiG 9.18.16-1-Debian <<>> txt secure-startup.com
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 19123
;; flags: qr rd ra; QUERY: 1, ANSWER: 1, AUTHORITY: 0, ADDITIONAL: 1

;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 512
;; QUESTION SECTION:
;secure-startup.com.          IN      TXT

;; ANSWER SECTION:
secure-startup.com.  1800    IN      TXT      "v=spf1 a mx ?all -
HTB{....s_2nd"

;; Query time: 104 msec
;; SERVER: 80.58.61.250#53(80.58.61.250) (UDP)
;; WHEN: Thu Aug 24 20:22:17 EDT 2023
;; MSG SIZE rcvd: 101
```