

client.py M

old_lady.jpg U X

...

received_127_0_0_1_52011.jpg U X

received_127_0_0_1_52011.jpg



PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

```
PS C:\Users\Shorts\Desktop\HumberWinter2026\Networking & Telecom\CPAN226_Lab2_TylerTy> python client.py --target_port 12001 --file old_lady.jpg
[*] Sending file 'old_lady.jpg' to 127.0.0.1:12001
[*] File transmission complete.
PS C:\Users\Shorts\Desktop\HumberWinter2026\Networking & Telecom\CPAN226_Lab2_TylerTy> 
```

python

powershell

Whole Image

6016x4016

11.11MB

Go Live

received_127_0_0_1_12000.jpg U X

naive_server > received_127_0_0_1_12000.jpg

An error occurred while loading the image.

[Open file using VS Code's standard text/binary editor?](#)

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

```
PS C:\Users\Shorts\Desktop\HumberWinter2026\Networking & Telecom\CPAN226_Lab_2> cd naive_client
PS C:\Users\Shorts\Desktop\HumberWinter2026\Networking & Telecom\CPAN226_Lab_2\naive_client> python client.py --target_port 12000 --file old_lady.jpg
[*] Sending file 'old_lady.jpg' to 127.0.0.1:12000
[*] File transmission complete.
PS C:\Users\Shorts\Desktop\HumberWinter2026\Networking & Telecom\CPAN226_Lab_2\naive_client> 
```

powershell naive_C...


python naive_server

python relay_proxy

Whole Image

11.10MB

Go Live

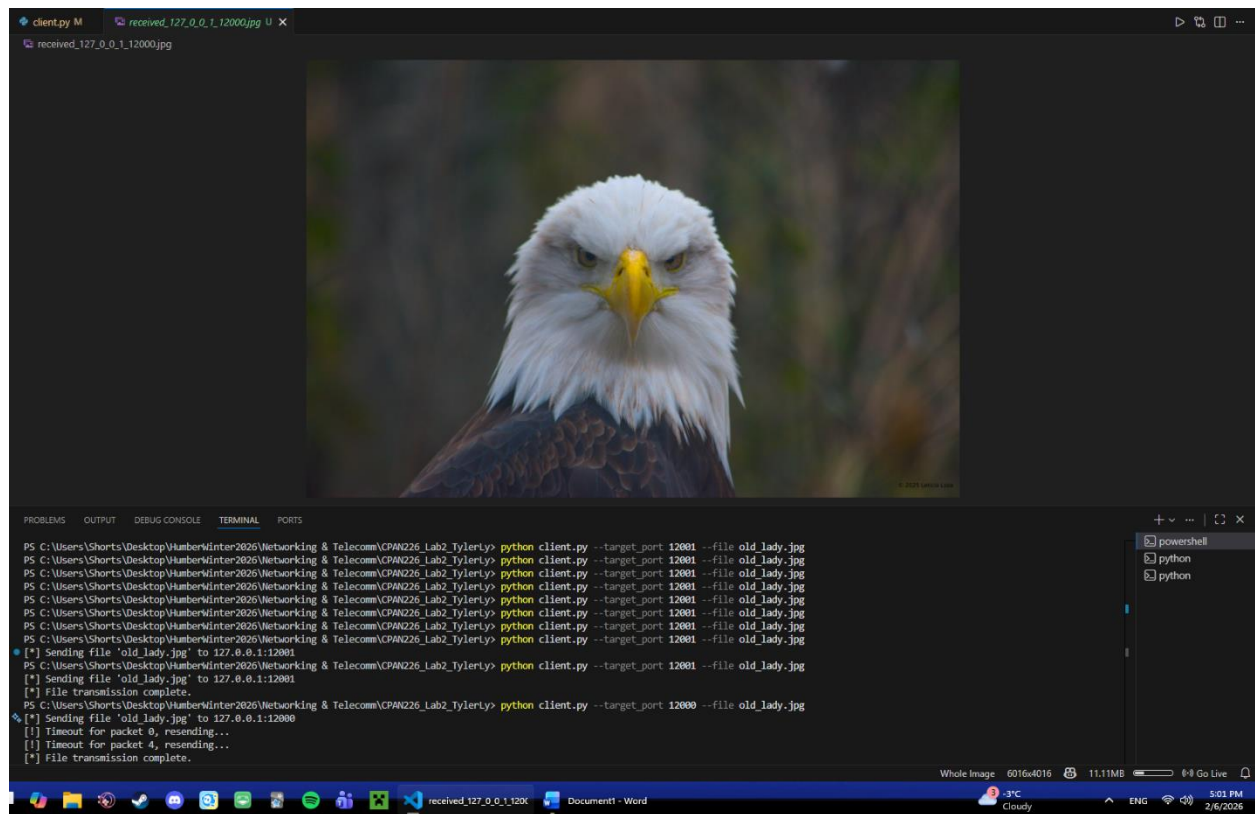

The buffer acts as storage for any out of order packets. It stores the data of any packets which have a higher sequence number than expected. Once the missing packets show up, it matches with one of the buffered packets and is written into the file.